


QCB-2 Control Software CCU



Product Features

- ▶ High-efficacy CPU: effectively run BXB's video conferencing control software.
- ▶ TCP/IP protocol control: easily manage your meeting via Internet.
- ▶ Meeting control and settings: meeting modes, open mic qty, mic ID, auto OFF, sound activation setting, camera preset point, and system/AUX/USB volume.
- ▶ Equipped with a service button: press the button when the system has unusual conditions, the system would transmit the information about the user and system's condition back to BXB's headquarter. It efficiently realizes remote troubleshooting.
- ▶ Equipped with 2 HDMI outputs: one for the video image of the other side; one for the image of presentation materials. It easily meets the demand of presentation sharing.

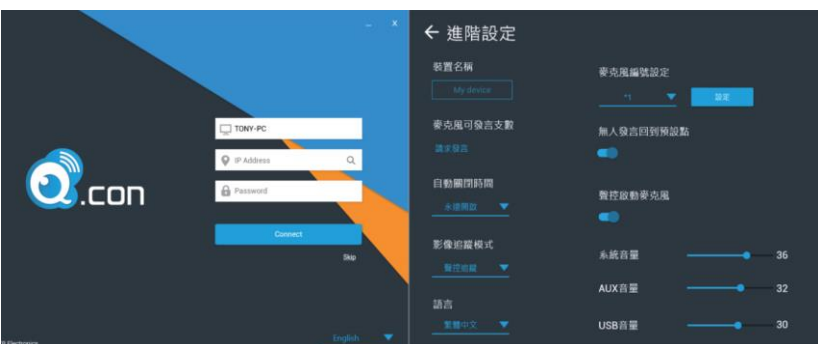

Hardware Specifications

Power Control	Power button x 1
Power Connector	DC12/7A MAX x 1
RS-232	DIN-9PIN connector x 2
USB	USB 2.0 x 3 & USB 3.0 x 4
Internet	RJ-45 TCP/IP x 2
Video Output	HDMI OUT x 2
Audio Interface	LINE OUT x 1 LINE IN x 1 MIC IN x 1
Status Indication	Indicator light x 6
Abnormal Report	Service button x 1



Physical Characteristics

Unit Size (HWD)	44*431*205(mm)
Cabinet 19"	1U
Weight	3KG (adaptor excluded)
Storage	-20°C ~ -80°C
Temperature	
Operating	0C ~ 45°C
Temperature	



Power Supply

External Power Supply	DC 12V 7A MAX
Voltage/Frequency	110/220V
Total Power of Power Supply	84W
Weight of Power Supply	0.5kg (power cord excluded)

BXB

BXB Electronics Co., Ltd.
(Headquarter in Kaohsiung, Taiwan)

A : Rm. 1, 6F., No.288-5, Xinya Rd., Qianzhen
Dist., Kaohsiung City 80673, Taiwan (R.O.C.)

T : + 886 7 9703838

F : + 886 7 9703883

E : bxb@bxb.tw

www.bxb.tw