


# POW-8CH-6000

POWER SEQUENCER

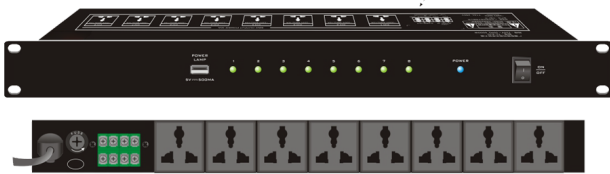

## FEATURE

- Adopt standard 1U cabinet design.
- 8-channel power sequence ON/OFF.
- Remote control (power-on + 24V DC signal) of 8-channel power sequence ON/OFF - It is effective when the rocker switch is turned OFF. Support configuring CH1 and CH2 as controlled or uncontrolled status.
- When the remote control is valid, the ALARM port on the rear panel is connected to achieve the cascade control of ALARM function.
- The maximum load power of a single channel is 2200W, and the total load power of all channels is up to 6000W.
- Input connector: high-power wire-coded power connector.
- Output connector: multi-use power socket.
- USB output interface, connected to LED lights.

## Technical specifications

### POW-8CH-6000

Rated output voltage	AC 220V 50Hz
Rated output current	30A
Controllable power supply	8 channels
Delay time of each action	1S
Power supply	VAC, 220V 50/60Hz, 30A
Rated output power of single channel	10A
Dimension (L×W×H)	484×295×44mm
Weight	4.2kg

---

For technical or sales support, please visit:

**[www.starviewint.asia](http://www.starviewint.asia)**

*Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.*

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact [info@starviewint.asia](mailto:info@starviewint.asia)

Copyright © 2025 STARVIEW ASIA. All rights reserved.  
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

