

# Management Platform

# **NJR-CTB**

The NJR-CTB is an advanced control box that expands the possibility for IP-NINJAR products (NJR-01UHD/NJR-W01UHD/NJR-T01SDI/NJR-04HD/NJR-AB08DAN).


The NJR-CTB automatically recognizes IP-NINJAR units which are connected in a network, monitors status, configures videowall, multiview, and other settings.


■ Specification

Item		Description
Device	Number of units	Up to 512 units (*1)
management	Management	Automatic device recognition, Automatic channel assignment, Tag registration, Virtual matrix
Display management capability	Videowall	10 pre-configured layout patterns
	Multiview	11 pre-configured layout patterns
Network	Protocol	TCP/IP, UDP/IP, HTTP, HTTPS, ICMP, IGMP, DHCP
	Connection	Up to 8 connections
Control	LAN	2 ports/RJ-45 10Base-T/100Base-TX/1000Base-T (Auto Negotiation), Auto MDI/MDI-X
	RS-232C	1 port/Captive screw (3-pin), full duplex, up to 115.2 kbps
Connector (For maintenance)	HDMI	2 outputs/Female HDMI Type A (19-pin)
	USB	2 ports/Female USB 3.0 Type-A
General	AC adapter	Input : 100 - 240 VAC ± 10%, 50 Hz/60 Hz ± 3 Hz Output : DC 12 V 3 A (A dedicated AC adapter is provided)
	Power consumption	About 27 Watts
	Dimensions	8.3 × 1.7 × 5.9" (210 (W) × 44 (H) × 150 (D) mm) (Half rack wide, 1U high) (Excluding connectors and the like)
	Weight	2.6 lbs. (1.2 kg)
	Temperature	Operating: 32°F to 104°F (0°C to +40°C) Storage: -4°F to +104°F (-20°C to +40°C) (*2)
	Humidity	Operating/Storage: 20% to 90% (Non Condensing)

- \*1 Depends on the number of channels that are necessary for connected devices.
- \*2 +140°F (+60°C) at maximum for a closed space during shipment.

#### **■** Front & Rear Panels

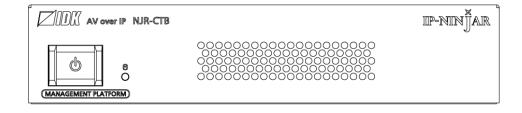

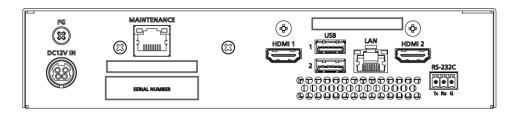

# Management Platform

## **NJR-CTB**

#### [Features]

#### ■ Management

- Recognizing IP-NINJAR products automatically and assigning channels
- · Naming units, tag registration, and virtual matrix for management
- · Videowall and Multiview can be configured readily

### ■ Control input

- · WEB browser control No need to install software
- · Controlled from external devices using control commands


#### ■ Control output

· Sending control commands to external devices

#### ■ Others

AC adapter with locking mechanism

## ■ Application example

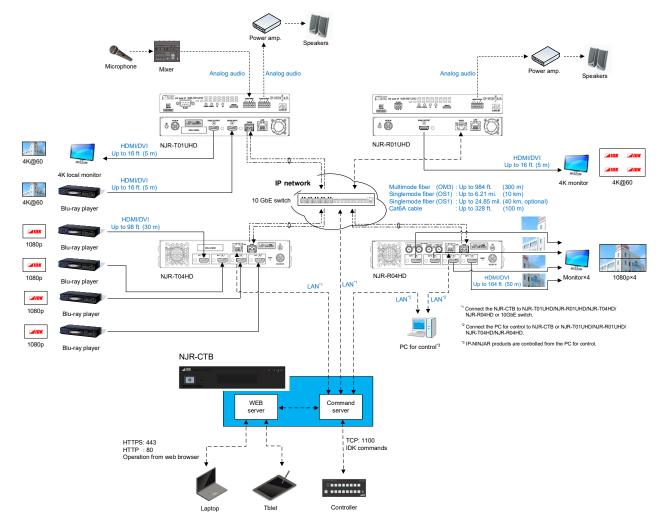

<sup>●</sup>All specifications and drawings are subject to change without notice. ●Blu-ray Disc and Blu-ray is a trademarks of Blu-ray Disc Association. ●Please do not use the supplied AC adapter and power supply cable for other products. ●IP-NINJAR is registered trademark of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified.