

STARVIEW SMART SWITCH AND SOCKET SSL-ZM6S SERIES

BEING BOTH SAFE AND SMART

Copyright © 2023 Starview Technologies Private Limited. All rights reserved. Singapore Headquarters: 60 Kaki Bukit Place, #05-19 Eunos Techpark, Singapore 415979 Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338

STARVIEW SMART SWITCH AND SOCKET SSL-ZM6S SERIES

BEING BOTH SAFE AND SMART


Starview smart switch and socket must be safe. You can put our Starview brand inside your walls without worrying about your stuff getting hot and possibly starting a fire. We are committed to making every user insist on trusting our brand.





2

www.starviewint.asia

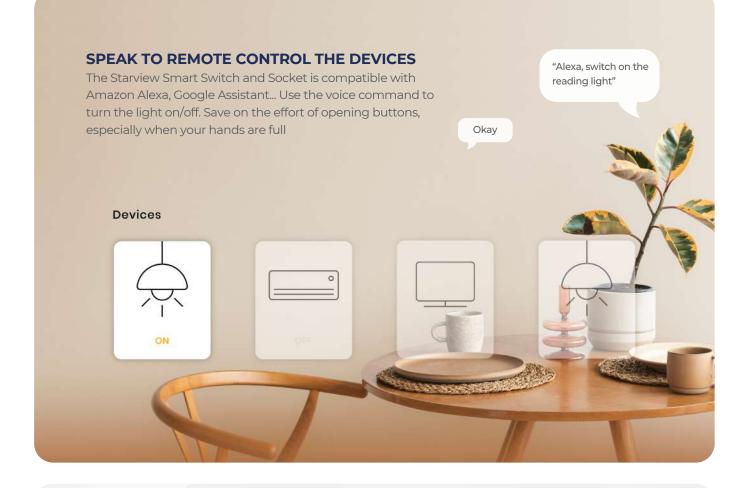

APP REMOTE CONTROL GIVES YOU MORE CONVENIENT

Download the free app from the Apple Store or Google Play Store, run it and pair it with your phone, and you can control the switch at home from anywhere








TIMING FUNCTION

Allows you to set the light to turn on and off at a specific time, or you can set a time switch to turn off the lights in the room when your child falls asleep, better planning life



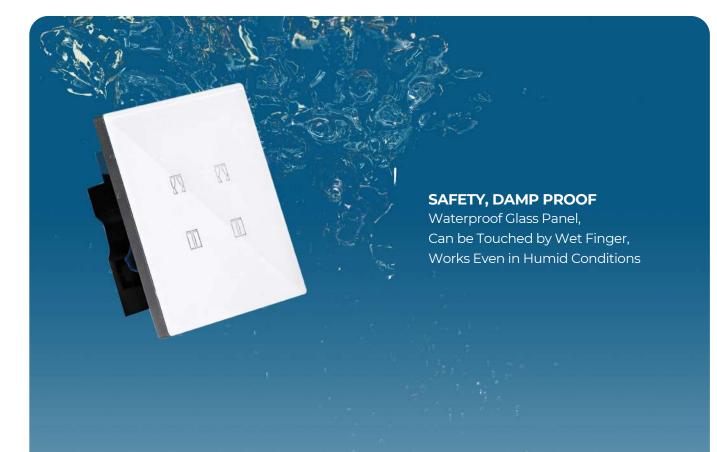

FAMILY SHARING

120

You can share your device with your family. Each person can control the switch of each light individually. It is easy to use and allows family members to experience the joy of smart life

Starview SSL-ZM6S-L1D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.






STARVIEW

STARVIEW SSL-ZM6S-L1D SPECIFICATION	
Connection	Zigbee 3.0
Channel	1 channel
Input Voltage	110-240V 50/60HZ
Maximum Current	10A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-L2D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.



STARVIEW SSL-ZM6S-L2D SPECIFICATION

STARTET SSE		
Connection	Zigbee 3.0	
Channel	2 channel	
Input Voltage	110-240V 50/60HZ	
Maximum Current	10A	
Material	PC + ABS + glass	
Mechanical Life	100,000	
Power Rating	<600W/channel	
Working Temperature	-20°C ~ 70°C	
Working Humidity	0% ~ 85% (non-condensing)	
Dimension	86 x 86mm	

Starview SSL-ZM6S-L3D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
 Share Control: Control your smart home together with your
- family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.





amazon alexa

STARVIEW

oe works with the Google Assistant

STARVIEW SSL-ZM6S-L3D SPECIFICATION	
Connection	Zigbee 3.0
Channel	3 channel
Input Voltage	110-240V 50/60HZ
Maximum Current	10A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-L4D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.





amazon alexa

e works with the Google Assistant

STARVIEW SSL-ZM6S-L4D SPECIFICATION	
Connection	Zigbee 3.0
Channel	4 channel
Input Voltage	110-240V 50/60HZ
Maximum Current	10A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-S1D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Smart Scene: Trigger on/ off by temperature, humidity or other environmental conditions
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.



STARVIEW SSL-ZM6S-S1D SPECIFICATION

Connection	Zigbee 3.0
Channel	Scenario Switch
Input Voltage	110-240V 50/60HZ
Maximum Current	16A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-C1D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Smart Scene: Trigger on/ off by temperature, humidity or other environmental conditions
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.



STARVIEW SSL-ZM6S-CID SPECIFICATION	
Connection	Zigbee 3.0
Channel	Curtain Switch
Input Voltage	110-240V 50/60HZ
Maximum Current	16A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-C2D

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Smart Scene: Trigger on/ off by temperature, humidity or other environmental conditions
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.



STARVIEW SSL-ZM6S-C2D SPECIFICATION	
Connection	Zigbee 3.0
Channel	Dual Curtain Switch
Input Voltage	110-240V 50/60HZ
Maximum Current	16A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-L1S

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.



App control Quick installation

e works with the Google Assistant



STARVIEW

Voice Control

) amazon alexa

STARVIEW SSL-ZM6S-L1S SPECIFICATION

ConnectionZigbee 3.0ChannelNon neutral 1 chanel switchInput Voltage110-240V 50/60HZMaximum Current10AMaterialPC + ABS + glassMechanical Life100,000Power Rating<600W/channel		
Input Voltage110-240V 50/60HZMaximum Current10AMaterialPC + ABS + glassMechanical Life100,000Power Rating<600W/channel	Connection	Zigbee 3.0
Maximum Current 10A Material PC + ABS + glass Mechanical Life 100,000 Power Rating <600W/channel Working Temperature -20°C ~ 70°C Working Humidity 0% ~ 85% (non-condensing)	Channel	Non neutral 1 chanel switch
Material PC + ABS + glass Mechanical Life 100,000 Power Rating <600W/channel Working Temperature -20°C ~ 70°C Working Humidity 0% ~ 85% (non-condensing)	Input Voltage	110-240V 50/60HZ
Mechanical Life 100,000 Power Rating <600W/channel Working Temperature -20°C ~ 70°C Working Humidity 0% ~ 85% (non-condensing)	Maximum Current	10A
Power Rating <600W/channel Working Temperature -20°C ~ 70°C Working Humidity 0% ~ 85% (non-condensing)	Material	PC + ABS + glass
Working Temperature -20°C ~ 70°C Working Humidity 0% ~ 85% (non-condensing)	Mechanical Life	100,000
Working Humidity 0% ~ 85% (non-condensing)	Power Rating	<600W/channel
	Working Temperature	-20°C ~ 70°C
Dimension 86 x 86mm	Working Humidity	0% ~ 85% (non-condensing)
	Dimension	86 x 86mm

Starview SSL-ZM6S-L2S

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.







STARVIEW SSL-ZM6S-L2S SPECIFICATION

Connection	Zigbee 3.0
Channel	Non neutral 2 chanel switch
Input Voltage	110-240V 50/60HZ
Maximum Current	10A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

Starview SSL-ZM6S-L3S

- Ultra-thin body, sleek and delicate
- Convenient, intelligent and truly
- Zigbee automatic networking technology, no manual code matching, simple system debugging
- App Control: Control switches from anywhere with your smartphone
- Voice Control: Works perfectly with Amazon Alexa, Google Home
- Timing: Set scheduled timers to turn on/ off at specified time
- Share Control: Control your smart home together with your family
- Available Colors: Silver, gold, black
- CNC aluminum frame, high quality 2.5D tempered glass panel, never fade.





STARVIEW SSL-ZM6S-L3S SPECIFICATION	
Connection	Zigbee 3.0
Channel	Non neutral 3 chanel switch
Input Voltage	110-240V 50/60HZ
Maximum Current	10A
Material	PC + ABS + glass
Mechanical Life	100,000
Power Rating	<600W/channel
Working Temperature	-20°C ~ 70°C
Working Humidity	0% ~ 85% (non-condensing)
Dimension	86 x 86mm

App control



Australia

Melbourne Office

Corporate offices

STARVIEW TECHNOLOGIES PTE LTD Singapore Headquarters 60 Kaki Bukit Place #05-19 Eunos Techpark Singapore 415979

Tel: +65 3157 5338 Fax: +65 3112 8181

Worldwide offices

Vietnam Hanoi Office R10, 33th Floor,C2 Building, D'Capitale,

119 Tran Duy Hung Street, Trung Hoa – Cau Giay, Hanoi

Hung Hoa – Cau Giay, Hanol Ho Chi Minh Office #C9-16, Block A, Sky Center Building, #10 Pho Quang Street, Tan Binh District, Ho Chi Minh City

Danang Office Add: Suite 607, Floor 6th Altara Suites by Ri-yaz 120 Vo Nguyen Giap, Phuoc My, Son Tra Danang

Tel: (024) 66661268 Hotline: 19008695 Sale Contact: 0866.207.855

Representatives

Brazil Tel: +55 11 9-8244-7630

Germany Tel: +49 172 946 69 39

France - Benelux - Africa Tel: +33 782 702 214

Southern, Eastern Europe & Middle East Operations Tel: +420 602 66 75 66





For the most current specification information, please visit: http://starviewtech.asia or http://www.starviewtech.net Copyright 2022 STARVIEW TECHNOLOGIES PTE LTD. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. STARVIEW TECHNOLOGIES PTE LTD management system is registered to ISO 9001 and ISO 45001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.