




The Starview PAM-500 amplifier is a 2U (less than 240W) mixer amplifier featuring 70V, 100V and 4-16ohm speaker outputs & 4 universal balanced XLR mic inputs with phantom power. The amplifier rated power ranges is from 60W, 120W, 240W to 350W, 500W (3U). There are 4 audio source selectors on the front panel. 4 Aux inputs by dual RCA type are located on the rear panel. Mic 1-4 with Vox priority selectors. The amplifier is also built-in pre-announcement chime with volume control and remote chime trigger. The REC output for tape recorder and PRE output, AMP input for adding extra signal processor like mixer, graphic equalizer. Volume control over Mic1-4, aux, master & overall treble/bass controls are provided. Complete protection includes short circuit and thermal protection, current limiter and overloading.

## Feature

- 2U tabletop and rack mounted design.
- Rated power output from 60W, 120W, 240W, 350W and 500W.
- 4 balanced XLR microphone inputs with phantom power and gain control.
- 4 dual RCA line inputs.
- 70V, 100V and 4-16Ω speaker terminals.
- Mic 1-4 with selectable priority over other inputs.
- Built-in chime, 2/4 tone selector and remote trigger.
- XLR balanced line output for extra power amplifier.
- REC output for tape recorder.
- PRE Output and AMP input for extra signal processor.
- Master, Mic1-4, Aux volume control, treble and bass control.
- Indications includes power and output level meter.
- AC 110V or 230V and DC 24V operation.

## Rear Panel

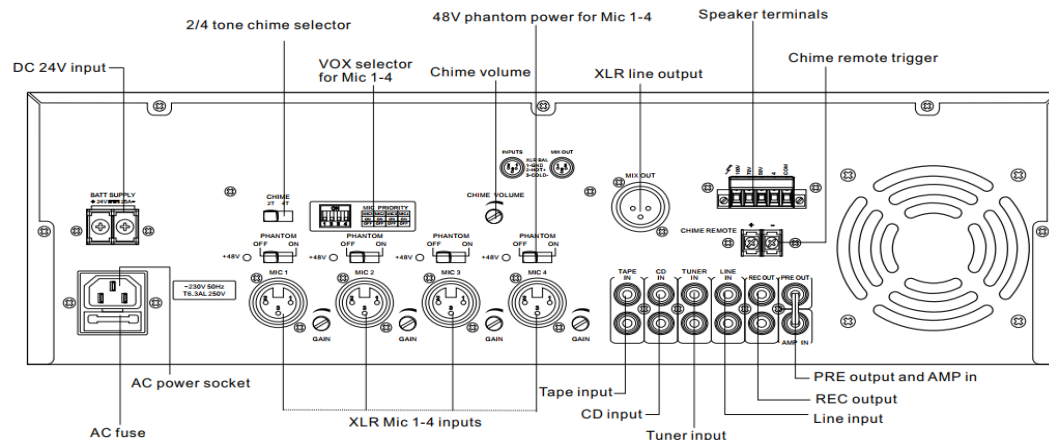

## Specifications

Model	PAM-500
Rated Power Output	500W
Speaker Outputs	50V, 70V, 100V & 4~16Ω
Input Sensitivity & Impedance	MIC 1, 2, 3, 4: $\pm 2.5\text{mV}/2\text{K}\Omega$ , Balanced XLR input AMP: $1000\text{mV}/10\text{K}\Omega$ , Unbalanced RCA input TAPE, CD, TUNER, LINE INPUT(AUX): $350\text{mV}/10\text{K}\Omega$ , Unbalanced RCA input
Output Sensitivity & Impedance	REC OUT: $200\text{mV}/470\Omega$ , Unbalanced RCA output PRE OUT: $1000\text{mV}/470\Omega$ , Unbalanced RCA output
Overload	MIC 1, 2, 3, 4: $>15\text{dB}$
Electromotive Force	AUX: $>18\text{dB}$
Tone	Bass: $\pm 10\text{dB}$ at 100Hz, Treble: $\pm 10\text{dB}$ at 10KHz
Frequency Response	50Hz~16KHz (+1dB, -3dB)
S/N Ratio	MIC 1, 2, 3, 4: 66dB; AUX: 76dB
THD	Less than 0.1% at 1KHz, 1/3 rated power
Muting Function	MIC 1~4 overrides other input signals with 30 dB attenuation Set the priority for MIC1~4 by the "MIC PRIORITY" switch on the rear panel ( Priority function available when it is "ON", the priority will be on lower level same as AUX input when it is "OFF")
Gain Control	$\pm 2.5\text{mV} \sim \pm 75\text{mV}$ at 30dB
Crosstalk	$\leq 50\text{dB}$
Phantom Power	+48V with LED indicator
Chime	2 tone and 4 tone options
Cooling	Fan automatically start up when temp reaches $55^{\circ}\text{C}$ ( Equipment below 120W will convect and cool button-up)
Protection	High temp, overload & short-circuit
Power Supply	$\sim 110\text{V} \sim 230\text{V}$ 50/60Hz
Power Consumption	750W
Dimensions	483 x 359 x 132mm
Weight	17.22Kg
Finish	Panel: aluminum plate, black Case: SPCC Panel