



STARVIEW SA-KLED INDOOR SERIES

INDOOR LED VIDEO WALL

Copyright © 2023 Starview Technologies Private Limited. All rights reserved. Singapore Headquarters: 60 Kaki Bukit Place, #05-19 Eunos Techpark, Singapore 415979 Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338





DESCRIPTION

Starview SA-KLED Series indoor fine pitch LED Video Wall displays offer seamless, front-service, high resolution visual experiences. Available in pixel pitches as small as 1.25mm, infinite expansion and stable configuration method different from the limited existing LCD screen configuration products. With a display capable of expressing various images, it is a multi-display that can be used efficiently in the desired place.

FEATURE

- ▶ 1.25/1.53 / 1.86 / 2.0 / 2.5 mm LED Pitch
- ▶ Indoor 600 ~ 900 cd/m² brightness
- ▶ High refresh rate & gray scale to realize clear and smooth images
- ▶ Durable over 100,000 hours of LED Lifetime (semi-permanent)
- ▶ Partial repair is possible with the separation method of LED module
- ▶ It realize perfect color adjustment with dedicated calibration tool
- Thin and light cabinet
- ► Fanless suitable for indoors, fanless design
- ▶ 16:9 video, curve screen, Certified product suitable for various applications such as panorama.

LED MODULE

The LED display, which expands by attaching a module to the cabinet, is easy to use and install, such as wall-mounted, mounted, and stand-type, and maintenance and module replacement are simple.



Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338

Copyright © 2023 Starview Technologies Private Limited. All rights reserved. Singapore Headquarters: 60 Kaki Bukit Place, #05-19 Eunos Techpark, Singapore 415979




INDOOR LED DISPLAY TECHNOLOGY

Starview brings LED video to the next level with its standard package LED display solution. Designed for premier applications that require the highest image quality at the closest viewing distances, this product takes advantage of 3-in-1 SMD (surface-mount device) LED technology to produce exceptional brightness, unsurpassed viewing angles and incredible picture detail. Starview can provide flexible solutions to fit customers' unique display needs, right down to the LED.



INSTALLED FOR MANY DISPLAY APPLICATIONS

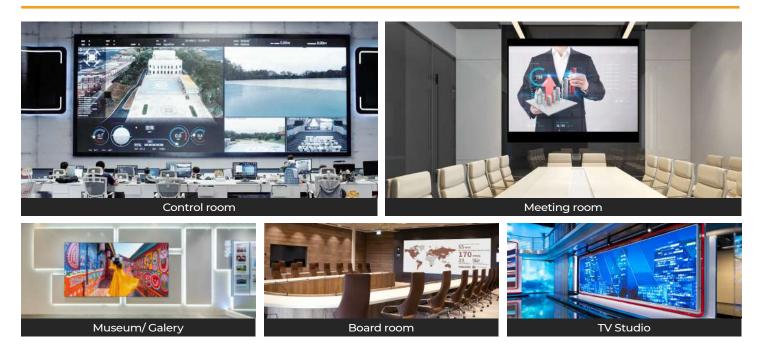

Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338



SPECIFICATION

STARVIEW SA-KLED SERIES INDOOR LED VIDEO WALL SPECIFICATIONS					
Model	SA-KLED-1.25I	SA-KLED-1.5I	SA-KLED-1.8I	SA-KLED-2.0I	SA-KLED-2.5I
LED Type	SMD1212, RGB 3-in-1	SMD1212, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD1515, RGB 3-in-1
Pixel Pitch	1.25 mm	1.53 mm	1.86 mm	2 mm	2.5 mm
Cabinet Resolution	512 x 384 pixel	416 x 312 pixel	344 x 258 pixel	320 x 240 pixel	256 x 192 pixel
Cabinet Size (W x H)	640 x 480 mm				
Cabinet Material	Die Casting Aluminum				
Cabinet Weight	≤7.5 Kg				
Modules/Cabinet	6 pcs				
Module Size	320 x 160 mm				
Module Resolution (W x H)	256 x 128 pixel	208 x 104 pixel	172 x 86 pixel	160 x 80 pixel	
Pixel Density (pixels/m²)	640,000	422,500	288,906	250,000	160,000
Module Weight	0.526 Kg	0.418 Kg	0.486 Kg	0.427 Kg	0.374 Kg
Birghtness (cd/m²)	600 - 900 cd/m²				
Contrast Ratio	≥5000:1				
Driving Method	1/64 scan	1/52 scan	1/43 scan	1/40 scan	1/32 scan
View Angle (H/V)	160°/160°				
Min. Viewing Distance	1.25 m	1.53 m	1.86 m	2 m	2.5 m
Display Color	16 bit				
Color Temperature	1000 - 9500 °K (Adjustable)				
Refresh Rate	≥3840 Hz				
Power Supply	AC110 ~ 240V, 50/60 Hz				
Power Consumption (Max. / Ave.)	600/150 W/m²				
MTBF	>100,000 hours				
LED Lifetime, Typical	≥100,000 hours				
IP Rating (Front/Rear)	IP40				
Maintenance Method	Front				
Storage Temperature	-20° to 50° C				
Storage Humidity	10 - 85% relative humidity non-condensing				
Operating Temperature	-20° to 50° C				
Operating Humidity	10 - 85% relative humidity non-condensing				

Corporate offices

STARVIEW TECHNOLOGIES PTE LTD Singapore Headquarters 60 Kaki Bukit Place #05-19 Eunos Techpark Singapore 415979

Tel: +65 3157 5338 Fax: +65 3112 8181 Hanoi Office R9, 33th Floor, C2 Building, D'Capitale, 119 Tran Duy Hung Street, Trung Hoa - Cau Giay, Hanoi Ho Chi Minh Office #C9-16, Block A, Sky Center Building, #10 Pho Quang Street, Tan Binh District, Ho Chi Minh City Danag Office Add: Suite 607, Floor 6th Altara Suites by Ri-yaz 120 Vo Nguyen Giap, Phuoc My, Son Tra, Danang Tel: (024) 66661268

Hotline: 19008695 Sale Contact: 0866.207.855

Vietnam

Australia NGITECH PTY LTD Level 40 140 Williams Street Melbourne VIC 3000

Tel: +61 455 225 908

Brazil Tel: +55 11 9-8244-7630

Germany Tel: +49 172 946 69 39









STARVIEW TECHNOLOGIES Infinite Possibilities

For the most current specification information, please visit: http://starviewtech.asia or http://www.starviewtech.net Copyright 2023 STARVIEW TECHNOLOGIES PTE LTD. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. STARVIEW TECHNOLOGIES PTE LTD management system is registered to ISO 9001 and ISO 45001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.