




STARVIEW SA-KLED OUTDOOR SERIES

OUTDOOR LED VIDEO WALL

Copyright © 2023 Starview Technologies Private Limited. All rights reserved.

Singapore Headquarters: 60 Kaki Bukit Place, #05-19 Eunos Techpark, Singapore 415979

Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338

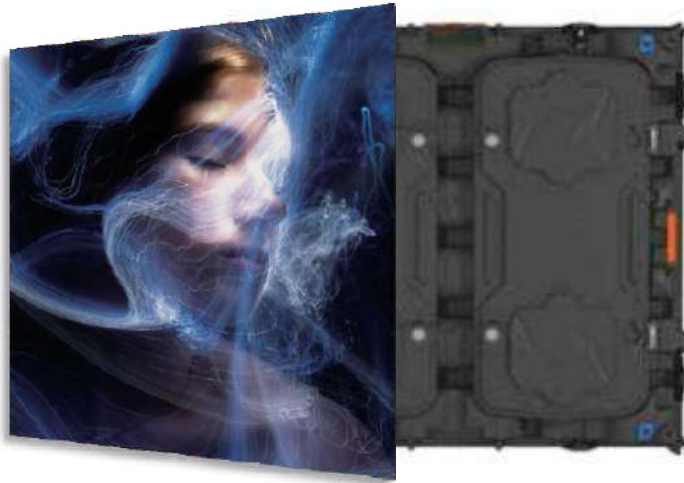

DESCRIPTION

Starview SA-KLED Series outdoor fine pitch LED Video Wall displays offer seamless, front-service, high resolution visual experiences. Available in pixel pitches as small as 2.5mm, infinite expansion and stable configuration method different from the limited existing LCD screen configuration products. With a display capable of expressing various images, it is a multi-display that can be used efficiently in the desired place.

FEATURE

- ▶ 2.5/ 3.0/ 4.0 mm LED Pitch
- ▶ Outdoor 4500 ~ 5000 cd/m² brightness
- ▶ High refresh rate & gray scale to realize clear and smooth images
- ▶ Durable over 100,000 hours of LED Lifetime (semi-permanent)
- ▶ Partial repair is possible with the separation method of LED module
- ▶ It realize perfect color adjustment with dedicated calibration tool
- ▶ Thin and light cabinet
- ▶ IP Rating IP65
- ▶ 16:9 video, curve screen, Certified product suitable for various applications such as panorama.

LED MODULE

The LED display, which expands by attaching a module to the cabinet, is easy to use and install, such as wall-mounted, mounted, and stand-type, and maintenance and module replacement are simple.



Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338

OUTDOOR LED DISPLAY TECHNOLOGY

Starview brings LED video to the next level with its standard package LED display solution. Designed for premier applications that require the highest image quality at the closest viewing distances, this product takes advantage of 3-in-1 SMD (surface-mount device) LED technology to produce exceptional brightness, unsurpassed viewing angles and incredible picture detail. Starview can provide flexible solutions to fit customers' unique display needs, right down to the LED.



INSTALLED FOR MANY DISPLAY APPLICATIONS



Website: www.starviewtech.asia or www.starviewtech.net | Email: sales@starviewint.com | Tell: +65 31575338

SPECIFICATION

STARVIEW SA-KLED SERIES OUTDOOR LED VIDEO WALL SPECIFICATIONS			
Model	SA-KLED-2.50	SA-KLED-3.00	SA-KLED-4.00
LED Type	SMD1415, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD1921, RGB 3-in-1
Pixel Pitch	2.5 mm	3.076 mm	4 mm
Cabinet Resolution	384 x 384 pixel	312 x 312 pixel	240 x 240 pixel
Cabinet Size (W x H)	960 x 960 mm		
Cabinet Material	Die Casting Aluminum		
Cabinet Weight	40 Kg		
Modules/Cabinet	18 pcs		
Module Size	320 x 160 mm		
Module Resolution (W x H)	128 x 64 pixel	104 x 52 pixel	80 x 40 pixel
Pixel Density (pixels/m ²)	160,000	105,625	62,500
Module Weight	0.6 Kg	0.6 Kg	0.6 Kg
Birghtness (cd/m ²)	4500 - 5000 cd/m ²		
Contrast Ratio	≥5000:1		
Driving Method	1/16 scan	1/16 scan	1/16 scan
View Angle (H/V)	170°/170°		
Min. Viewing Distance	2.5 m	3.076 m	4 m
Display Color	14 bit		
Color Temperature	3200 - 12000 °K (Adjustable)		
Refresh Rate	≥3840 Hz		
Power Supply	AC100 ~ 240V, 60Hz		
Power Consumption (Max. / Ave.)	850/280 W/m ²		
MTBF	>100,000 hours		
LED Lifetime, Typical	≥100,000 hours		
IP Rating (Front/Rear)	IP65		
Maintenance Method	Back		
Storage Temperature	-20° to 50° C	-20° to 80° C	
Storage Humidity	10 - 95% relative humidity non-condensing		
Operating Temperature	-20° to 50° C	-20° to 80° C	
Operating Humidity	10 - 95% relative humidity non-condensing		

Corporate offices

STARVIEW TECHNOLOGIES PTE LTD
Singapore Headquarters
 60 Kaki Bukit Place
 #05-19 Eunos Techpark
 Singapore 415979

Tel: +65 3157 5338
 Fax: +65 3112 8181

Vietnam
Hanoi Office
 R9, 33th Floor, C2 Building, D'Capitale,
 119 Tran Duy Hung Street,
 Trung Hoa – Cau Giay, Hanoi
Ho Chi Minh Office
 #C9-16, Block A, Sky Center Building,
 #10 Pho Quang Street,
 Tan Binh District, Ho Chi Minh City
Danang Office
 Add: Suite 607, Floor 6th Altara Suites
 by Ri-yaz 120 Vo Nguyen Giap, Phuoc My,
 Son Tra, Danang

Tel: (024) 66661268
 Hotline: 19008695
 Sale Contact: 0866.207.855

Australia
NGITECH PTY LTD
 Level 40 140 Williams Street
 Melbourne VIC 3000
 Tel: +61 455 225 908

Brazil
 Tel: +55 11 9-8244-7630

Germany
 Tel: +49 172 946 69 39

