







IOT Control Panel Gateway & Next Gen Soft Switch

INTELLIGENT CONTROL PANEL GATEWAY

The touch control panel gateway is all in one Smart Home Central Control product. It can control smart switches, smart curtains, security cameras, video doorbells, and all other smart home devices.














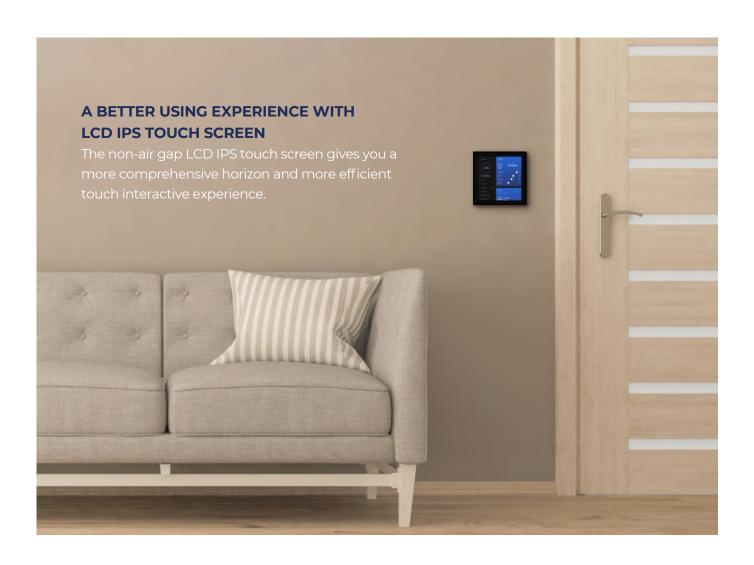



TOUCH THE PANEL, CONTROL THE SMART DEVICES

The touch control panel has a wealth of devices control entrances, is compatible with most of the Starview devices. It can easily achieve the precise control of lighting, curtains, air conditioning and other smart devices.

CREATE YOUR OWN SMART SCENE

Custom linkage scene in the smart central control panel. Touch the panel or using voice to switch the scene modes quickly. Even if the home network is down, the local smart scenario still works on the LAN.









SLEEP SOUNDLY

PUT IT IN THE BEDROOM

Turn off multiple smart devices with one click before bed, which gives you more convenient and let you sleep more safely

RECEPTION PARTY

PUT IT IN THE LIVING ROOM,
TOUCH IT TO START THE PARTY MODE


The curtain and TV will turn on automatically, and the lamp in the living room will set to the right brightness



GO HOME AND LEAVE HOME

PUT IT BESIDES THE DOOR

Turn on the lamp, curtain and air conditioner with one click when return home Turn off the lamp, curtain and air conditioner with one click when get out of home.

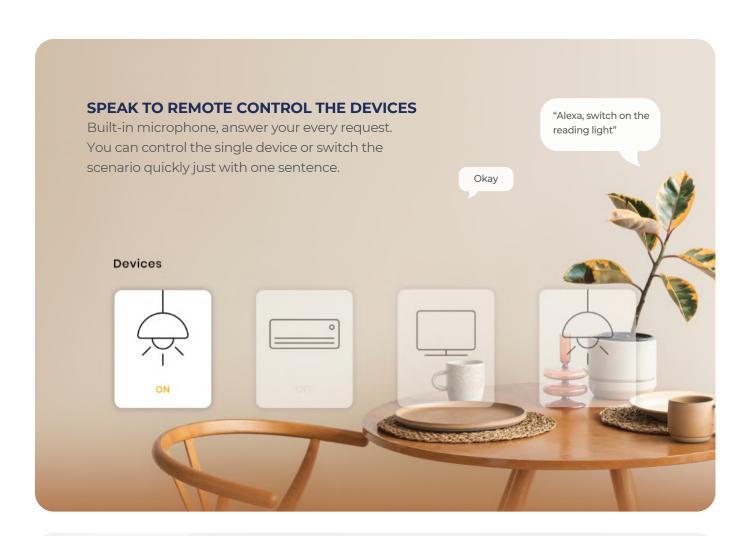




APP REMOTE CONTROL GIVES YOU MORE CONVENIENT

When you out of home, enter the app, you can remote control the devices in your home. The devices are arranged in order, you can find the devices you need quickly in the app.



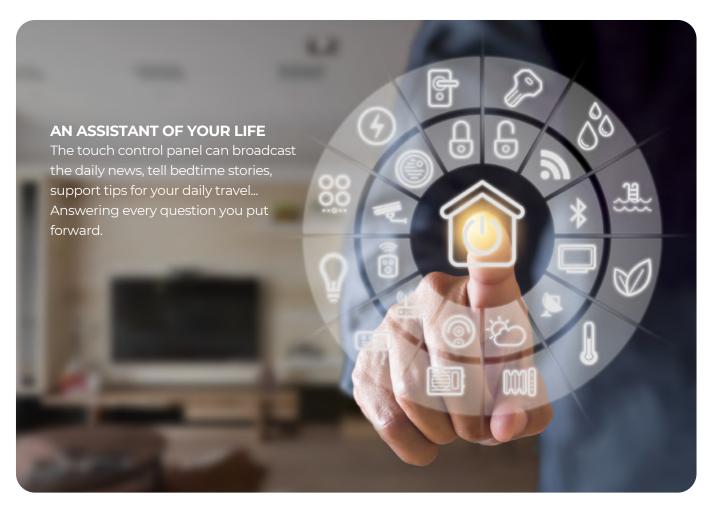



Starview SSL-SS-T6E

- Compatible with European standard wall boxes, simple in wall installation.
- 4.1-inch HD IPS LCD, multi-touch screen, dual array microphone with noise reduction, auto light sensor, built-in IW speaker.
- ZigBee gateway function, APP remote control.
- Control the lights, curtains, air conditioners, and all othersmart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen.

















works with the Google Assistant





STARVIEW SSL-SS-T6E SPECIFICATION		
	Screen Size	4.1"
Screen	Screen Resolution	480 x 480 pixels
	Screen Type	LCD Multitouch capacitive screen
	Operating System	Android
System	СРИ	Quad core
	RAM/ROM	1GB/8GB
Network	RS485	Optional
	Wifi	Wifi 802.11 a/b/g/n dual band 2.4/5G (Optional)
	Ethernet	Optional
ЮТ		Zigbee/Bluetooth/Wifi
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains
Material		Crystal/Glass
Power Supply		110-240VAC 50/60Hz
Speaker		Built-in 1W

Starview SSL-SS-T8E

- The touch control panel adopts a 4.1-inch multi-touch screen. The fingertip interaction is precisely positioned, and the touch is smooth.
- Date, clock, weather, temperature, device control and other signs appear on the screen. Simple graphics and dynamic effects.

- There is network port access behind the touch control panel, the gateway control is more stable, and the comprehensive intelligent control of smart switches, sockets, sensor, door locks... Really realizes a single panel in charge of the whole home.
- The touch central control can change the scene with one button, switch the scene freely, and control your home. Rich gateway capabilities, easy installation, voice and App control, unified management of home devices.
- The smart central control screen can replace the Zigbee gateway with strong compatibility. It can add 99+ sub-devices, and can control switches, sockets, temperature control, curtains, lamps and other equipment more stably in real time.
- Suitable for different places like home, supermarket store, office, company factory, hotel restaurant, etc.







Voice Control



LCD



Smart Touch

Panel









works with the

Google Assistant





STARVIEW SSL-SS-T8E SPECIFICATION			
	Screen Size	4.1"	
Screen	Screen Resolution	480 x 480 pixels	
	Screen Type	LCD capacitive single touch G+F	
	Operating System	Linux	
System	CPU	Cortex-A7 dual-core	
System	RAM	128 MB built-in	
	Flash	16M	
Network	Wifi	Wifi 802.11 a/b/g/n dual band 2.4/5G (Optional)	
Network	Ethernet	Support RJ45	
ЮТ		Zigbee/Wifi	
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains	
Material		Crystal/Glass	
Power Supply		110-240VAC 50/60Hz	

Starview SSL-SS-FX

• Easy smart home control for everyone: Brilliant touchscreen panels with built-in Smart APP make it easy for everyone at home to control popular smart devices, lighting, locks, thermostats, scenes and more by simply.

- Make your home smarter: You can set up different scenes and let different smart home appliances match your life. You no longer need to look for remote controls for air conditioners everywhere, and you don't need to use many switches. You only need to tap when you enter the door, and a romantic dinner will be accompanied. With just the right warm light, soothing music will appear immediately.
- Now everyone at home can easily browse and play music with different brand speakers, control anywhere smart lights in your home, and unlock the door with a compatible smart lock-all without needing a phone.





STARVIEW SSL-SS-FX SPECIFICATION		
Screen	Screen Size	6.1"
	Screen Resolution	1024 x 600 pixels
	Screen Type	LCD Multitouch capacitive screen
	Operating System	Android
System	CPU	Quad core
	CPU Frequency	1.5 GHz
	Fuselage Memory	1GB/2GB (Optional)
Storage	Expand TF Card Memory	8GB
	USB	2.0 interface, 32 GB read
Network	Wifi	Wifi 802.11 a/b/g/n dual band 2.4/5G (Optional)
Network	Ethernet	Optional
IOT		Zigbee/Bluetooth/Wifi
101		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains
Material		Crystal/Glass
Power Supply		110-240VAC 50/60Hz
Power Amplifier		2 x 20W (TI digital tapping)
Output Impedance		4 to 8 ohms
THD		0.03% (1W.1KHZ)
Frequency Response		20Hz - 20KHz
SNR		98db
Audio Formats		MP3, WAV, WMA, FLAC, APE, and ACC, AC3, OGG audio formats
Video Formats		The MPEG - 1/2/3/4, the RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H264, and other video format
Audio Input		AUX, one group
Audio Output		One group

Starview SSL-SS-F8

- Through SSL-SS-F8, you can easily control the smart devices in the whole house; aggregate and control the devices in the whole house and realize intelligent linkage to provide considerate and active services.
- The Starview 8.2" touch control panel has a rotary switch design along with the main 8.2" multitouch LCD screen. The rotary switch also has a 1.3" LCD touch screen, which is perfect for thermostat control and lights dimmer.
- Mobile APP control, voice intercom, broadcast, APP push content.
- Support voice wake-up, play music, stories, children's songs, tell jokes, check the weather, check the flight, smart home control.
- Bluetooth playback, the host can control the Bluetooth playback device to switch music.
- Play music at regular intervals, start songs at regular intervals, and play specified music at regular intervals.
- Support external devices to control the device through 485.
- Local, TF card, U disk, Bluetooth, play music.
- 485: supports bidirectional 485 control.
- SDK is open and connected to smart home.







STARVIEW SSL-SS-F8 SPECIFICATION		
	Screen Size	8.2"
Screen	Screen Resolution	1280 x 800 pixels
	Screen Type	LCD Multitouch capacitive screen
	Operating System	Android
System	CPU	Quad core
	CPU Frequency	1.5 GHz
	Fuselage Memory	2GB
Storage	Expand TF Card Memory	8GB
	USB	2.0 interface, 32 GB read
Network	Wifi	Wifi 802.11 a/b/g/n dual band 2.4/5G (Optional)
Network	Ethernet	Optional
ЮТ		Zigbee/Bluetooth/Wifi
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains
Material		Crystal/Glass
Power Supply		110-240VAC 50/60Hz

Power Amplifier	2 x 20W (TI digital tapping)
Output Impedance	4 to 8 ohms
THD	0.03% (1W.1KHZ)
Frequency Response	20Hz - 20KHz
SNR	98db
Audio Formats	MP3, WAV, WMA, FLAC, APE, and ACC, AC3, OGG audio formats
Video Formats	The MPEG - 1/2/3/4, the RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H264, and other video format
Audio Input	AUX, one group
Audio Output	One group

Starview SSL-SS-T3-EU3-Z0

- Smart switch with build-in 3 relays SSL-SS-T3-EU3-Z0 is 3 Channel Smart switch, it can connect with maximum 200W Lamp directly.
- Compatible with European standard wall boxes, simple in wall installation.
- 4.1-inch HD IPS LCD, multi-touch screen.
- ZigBee gateway function, APP remote control.
- It can be a scene panel when it's connected to the Zigbee smart home gateway, and realize to control the lights, curtains, etc, active the scene mode with one touch on the screen.









LCD



Panel





App control

works with the







STARVIEW SSL-SS-T3-EU3-Z0 SPECIFICATION		
	Screen Size	4.1"
Screen	Screen Resolution	480 x 480 pixels
	Screen Type	LCD, G+G 5 touch industrial grade capacitive screen
Systom	Operating System	RTOS
System	CPU	Xtensa - LX7 dual core 240MHz
Network		Wireless Zigbee
ЮТ		Zigbee
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains
Material		Crystal/Glass

Load	Single 200W, the total load does not exceed 600W
Installation Method	Pre-embedde
Channel	3-Channel smart wall switch & Scene Panel 2 in 1
Power Supply	220-240VAC 50/60Hz

Starview SSL-SS-T3-CN4-Z0

- Smart switch with build-in 4 relays SSL-SS-T3-CN4-Z0 is 4 Channel Smart switch, it can connect with maximum 200W Lamp directly.
- Compatible with Chinese standard wall boxes, simple in wall installation.
- 4.1-inch HD IPS LCD, multi-touch screen.
- ZigBee gateway function, APP remote control.
- It can be a scene panel when it's connected to the Zigbee smart home gateway, and realize to control the lights, curtains, etc, active the scene mode with one touch on the screen.







Voice Control



LCD



Panel











STARVIEW SSL-SS-T3-CN4-Z0 SPECIFICATION		
	Screen Size	4.1"
Screen	Screen Resolution	480 x 480 pixels
	Screen Type	LCD, G+G 5 touch industrial grade capacitive screen
System	Operating System	RTOS
System	СРИ	Xtensa - LX7 dual core 240MHz
Network		Wireless Zigbee
ют		Zigbee
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains
Material		Crystal/Glass
Load		Single 200W, the total load does not exceed 800W
Installation Method		Pre-embedde
Channel		4-Channel smart wall switch & Scene Panel 2 in 1
Power Supply		220-240VAC 50/60Hz

Starview SSL-SS-T3E-EU1-ZI

- Smart switch with build-in 1 channel relay switch, 1 way light dimming and Scene panel 3 in 1.
- Compatible with European standard wall boxes, simple in wall installation.
- 4.1-inch HD IPS LCD, multi-touch screen.
- ZigBee gateway function, APP remote control.
- With Dimmer switch and scene panel function, connect with the Zigbee gateway.
- It can be a scene panel when it's connected to the Zigbee smart home gateway, and realize to control the lights, curtains, etc, active the scene mode with one touch on the screen.
- 0 to 10V dimming, just connect the lights or lamp with 0 to 10V dimming power driver, dimming power driver connect with 4 inch touch pad.















App control

Voice Control

LCD

Smart Touch Panel

Quick installation







STARVIEW SSL-SS-T3E-EU1-ZI SPECIFICATION		
	Screen Size	4.1"
Screen	Screen Resolution	480 x 480 pixels
	Screen Type	LCD, G+G 5 touch industrial grade capacitive screen
System	Operating System	RTOS
System	СРИ	Xtensa - LX7 dual core 240MHz
Network		Wireless Zigbee
ЮТ		Zigbee
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains
Material		Crystal/Glass
Load		Single 200W, the total load does not exceed 400W
Installation Method		Pre-embedde
Channel		1 - channel relay switch + 1-way light dimming & Scene panel 3 in 1
Power Supply		220-240VAC 50/60Hz

Starview SSL-SS-T3E-CN2-Z2

- Smart switch with build-in 2 channel relay switch, 2 way light dimming and Scene panel 3 in 1.
- Compatible with Chinese standard wall boxes, simple in wall installation.

- 4.1-inch HD IPS LCD, multi-touch screen.
- ZigBee gateway function, APP remote control.
- With Dimmer switch and scene panel function, connect with the Zigbee gateway.
- It can be a scene panel when it's connected to the Zigbee smart home gateway, and realize to control the lights, curtains, etc, active the scene mode with one touch on the screen.
- 0 to 10V dimming, just connect the lights or lamp with 0 to 10V dimming power driver, dimming power driver connect with 4 inch touch pad.















App control

ntrol Voice Control

LCD

Smart Touch Panel

Quick installation









STARVIEW SSL-SS-T3E-CN2-Z2 SPECIFICATION		
Screen	Screen Size	4.1"
	Screen Resolution	480 x 480 pixels
	Screen Type	LCD, G+G 5 touch industrial grade capacitive screen
System	Operating System	RTOS
System	СРИ	Xtensa - LX7 dual core 240MHz
Network		Wireless Zigbee
ЮТ		Zigbee
		Lights, outlets, air conditioning, scenes, groups, video doorbells, curtains, etc.
Material		Crystal/Glass
Load		Single 200W, the total load does not exceed 800W
Installation Method		Pre-embedde
Channel		2 - channel relay switch, 2 - way light dimming & Scene panel 3 in 1
Power Supply		220-240VAC 50/60Hz



Melbourne Office

140 Williams Street

Corporate offices

STARVIEW TECHNOLOGIES PTE LTD Singapore Headquarters

Tel: +65 3157 5338 Fax: +65 3112 8181

Worldwide offices

Hanoi Office R10, 33th Floor,C2 Building, D'Capitale, Ho Chi Minh Office

#C9-16, Block A, Sky Center Building, #10 Pho Quang Street, Tan Binh District, Ho Chi Minh City Danang Office

Add: Suite 607, Floor 6th Altara Suites by Ri-yaz 120 Vo Nguyen Giap, Phuoc My, Son Tra, Danang

Representatives

Tel: +55 11 9-8244-76<u>3</u>0

Germany Tel: +49 172 946 69 39

France - Benelux - Africa Tel: +33 782 702 214

Southern, Eastern Europe & Middle East Operations Tel: +420 602 66 75 66







© RoHS (€







For the most current specification information, please visit: http://starviewtech.asia or http://www.starviewtech.net Copyright 2022 STARVIEW TECHNOLOGIES PTE LTD. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. STARVIEW TECHNOLOGIES PTE LTD management system is registered to ISO 9001 and ISO 45001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.