




Ideal for small to medium sized installations such as surveillance rooms, presentation auditoriums, sports & entertainment venues and digital signage.

FEATURE

- 3 Models, up to 8 inputs & 8 outputs
- Unlimited number of layouts
- Simple setup, any type of source can connect
- Up to 8 windows per display
- Up to 16 windows per system
- Compatible with LCD, LED, cubes and projectors display technologies
- HDCP-compatible
- Flexible video wall layout in geometry & resolution
- No operating system means no viruses or updates
- Quiet and compact

Schematic diagram

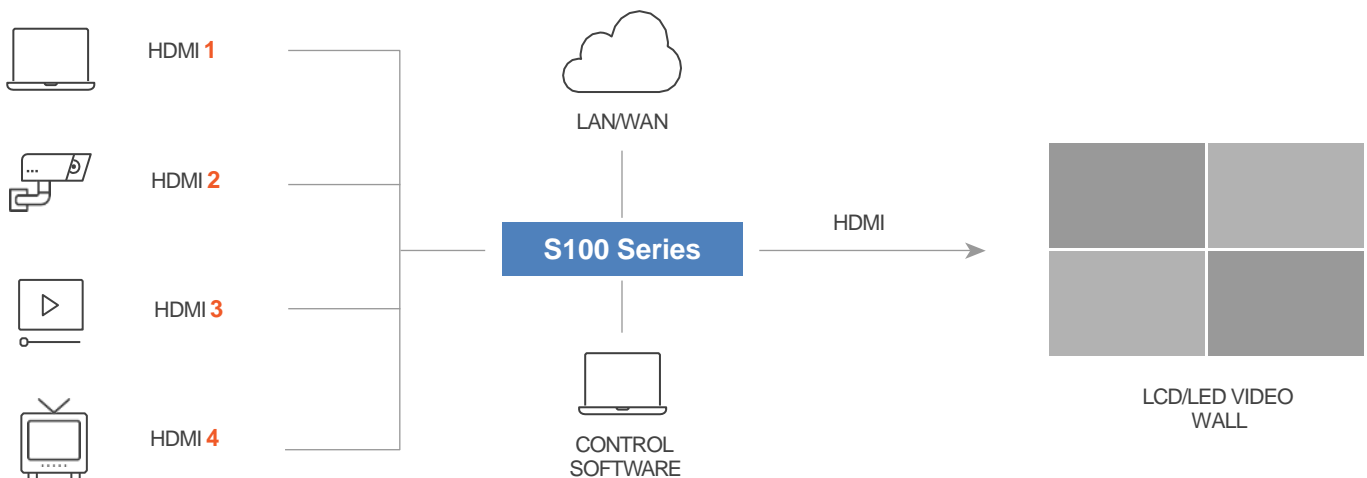

Specifications



| INPUTS | S144 | S148 | S188 |
|----------------------------|-----------------------------------|------|------|
| Max FHD Inputs | 4 | 4 | 8 |
| Interface | HDMI | | |
| Max Input Resolution | 1920 x 1200 @ 60Hz | | |
| OUTPUTS | | | |
| Max FHD Inputs | 4 | 8 | 8 |
| Interface | HDMI | | |
| Max Output Resolution | 1920 x 1200 @ 60Hz | | |
| HARDWARE | | | |
| Form Factor | 1 RU | | |
| Digital Sampling | 24bit, 8 bits per color | | |
| Color Space | 8bit processing, 4:4:4 | | |
| Boot up time | ≤ 20s | | |
| Operating Temperature | 0° to +40° C | | |
| Storage Temperature | minus 10° to 70° C | | |
| Operating Humidity | 10% to 85%, Non-condensing | | |
| Storage Humidity | 10% to 90%, Non-condensing | | |
| MTBF | 100,000 hrs | | |
| Power Consumption | 550W | | |
| SOFTWARE | | | |
| OS | None - Hardware | | |
| Control Software | Windows Application | | |
| Max Windows per display | 8 | | |
| Max Windows per Video Wall | 16 | | |
| Picture-in-Picture | Yes | | |
| HDCP | Yes | | |
| Source Switching | ≤ 20ms | | |
| Window Creating | ≤ 16ms | | |
| Layouts | ≤ 16ms | | |
| API | UDP or RS233 | | |
| CERTIFICATIONS | | | |
| Regulatory Certifications | UL, EMC Class A: FCC, CE, KC, RCM | | |

Copyright © 2019 Starview International Private Limited. All rights reserved.

Singapore Headquarters: 60 Kaki Bukit Place, #05-19 Eunos Techpark, Singapore 415979

Website: www.starviewint.com | Email: sales@starviewint.com | Tell: +65 3157 5338