


CS SERIES

CEILING SPEAKER

DESCRIPTION

High-grade indoor ceiling speakers, using 2 frequency division design; Fibre waterproof basin, aluminum film high pitch, high fidelity restore human voice. Suitable for high-end hotels, clubs and business buildings.

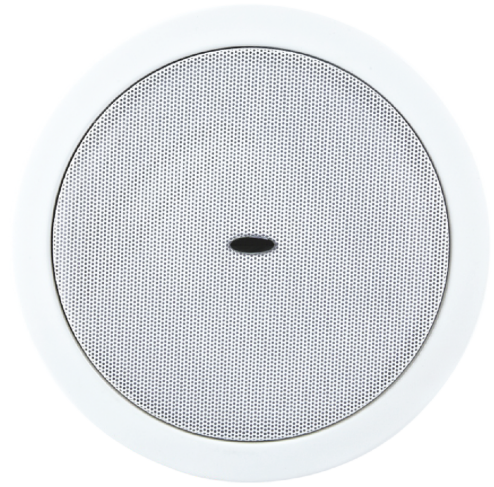

Technical specifications

CS Series

Models	CS-20	CS-30	CS-40
Power taps (100V)	20W	30W	40W
Power taps(70V)	10W	15W	20W
Impedance	Black: Com Red: 500Ω	Black: Com Red: 330Ω	Black: Com Red: 250Ω
SPL (1W/1M)	89dB ±3dB	90dB ±3dB	92dB ±3dB
Frequency response (-10dB)	80Hz -20KHz	80Hz -20KHz	80Hz -20KHz
Speaker unit	4" x 1 1.5" x 1	5" x 1 1.5" x 1	6.5" x 1 1.5" x 1
Cutout size	180mm	210 mm	250mm
Dimension	213 x 135mm	240 x 155mm	280 x 190mm
Weight	1.8Kg	2Kg	2.7Kg

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

