


MPS-450

PROFESSIONAL SPEAKER

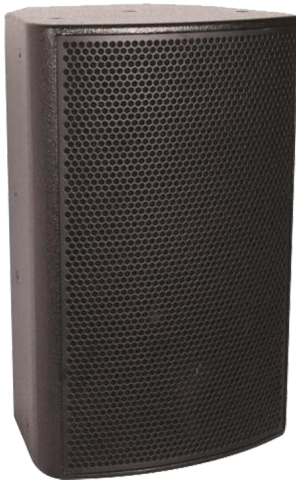

DESCRIPTION

It works with the audio processor to form a set of high-end entertainment and conference professional sound system with outstanding vocal performance. It is suitable for various high-end conference rooms and multipurpose halls as the main speaker or auxiliary speaker.

FEATURE

- Adopt a mid-woofer and an annular polyethylene diaphragm compressed tweeter.
- 15mm birch housing, light weight, wear-resistant spray paint treatment, and dust-proof net cotton inside.
- The frequency divider in precise design is used to optimize the vocal MF performance.
- The entire series is equipped with efficient high-power amplifier modules.
- Multiple screw hoisting holes, a pole socket with a diameter of 35mm, various installation methods.

Technical specifications

MPS-450

Impedance	4Ω
Frequency response	45Hz-20KHz
Rated power	450W
Peak power	1800W
Sensitivity	100dB/W/M
Maximum SPL (rated/peak)	127dB/133dB
Coverage angle	(H)80° (V)60°
Tweeter	1.73" compressed tweeter ×1
Woofer	15" woofer ×1
Line input sensitivity	0dB
Dimension (H×W×D)	660×435×430mm
Weight	28.8Kg
Power supply	AC 220V 50Hz
Power consumption	360W

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

