

# SA-OLD10

OUTDOOR LED VIDEO WALL



## KEY FEATURES

- High brightness, waterproof, high refresh rate.
- SMD package offers wide viewing angle.
- Offers super high-definition image quality.
- Top grade quality, high end configuration, wholesale price.

## DESCRIPTION

The Starview SA-OLD10 is product lines installed in outdoor environment, offers a wide variety of sizes to meet the needs of any project. Our outdoor LED displays are sharp, stunning and designed to excel in high ambient light environments, capturing audience's attention and helping you provide an unforgettable experience.

Featuring a convenient size, the all-in-one design fits a broad range of fine-pitch installation environments. The Starview SA-OLD10 is light weight and easy to handle enabling it to be an attractive solution for changing video walls or traditional video walls favoring a compact fine pitch solution.

Our wide range of high resolution direct view LED can be used for a variety of applications, but are increasingly used within advertising screen, event, rental environments as well as the traditional field of entertainment.



## PRODUCT ADVANTAGES




### EASY & QUICK INSTALLATIONS

Starview strives to provide each customer with the best service possible in any application. This starts with designing displays with ease of service in mind. With front and rear access, our High Resolution Outdoor Video Displays provide dynamic video quality with worry-free installation and service.



### HIGH DEFINITION DISPLAYS

Starview SA-OLD10 offers the finest pixel pitch LED display solutions, suitable for the most demanding applications where a fine pixel pitch is a need in a fixed installation environment such as outdoor advertisement media, government & enterprise project, culture & tourism, sports, propaganda image, commercial real estate etc.

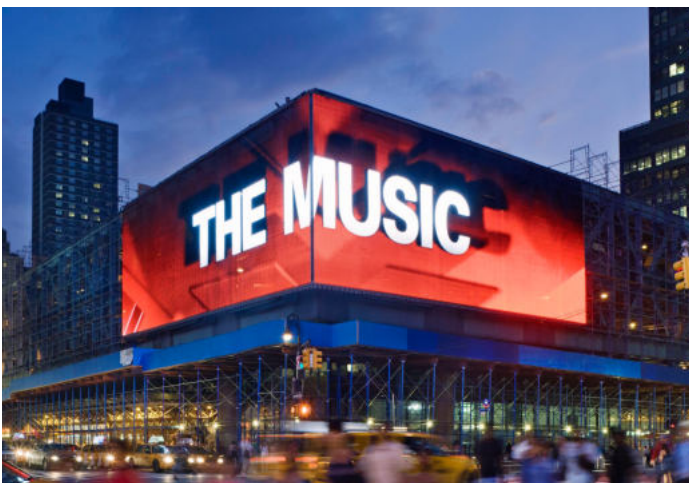

### UNIFORM COLORS AND BRIGHTNESS ALL THE TIME

Starview LED technology guarantees uniform colors and brightness across the display. With this advanced technology, you can mix different batches of tiles and expect the best picture with accuracy and consistency over the lifetime of the display.



### MINIMAL POWER CONSUMPTION

Power consumption has been a major concern for many LED applications, especially those requiring 24/7 operation. Starview LED displays are designed with optimized power supplies to limit power consumption to a minimum. This not only helps you save money but also confirms Starview's long-term commitment to environmental protection and core focus on green energy efficient solutions.

For technical or sales support, please visit:  
[www.starviewint.asia](http://www.starviewint.asia)

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact [info@starviewint.asia](mailto:info@starviewint.asia)

Copyright © 2025 STARVIEW ASIA. All rights reserved.  
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

**Technical specifications****SA-OLD10**

Pixel Pitch	10mm
LED Type	SMD2727, 3-in-1 RGB
Pixel Density	10,000 pixels/m <sup>2</sup>
Module Size (W x H)	320mm x 160mm
Cabinet Size (W x H) (Customize)	960mm x 960mm and 1280mm x 960mm
Cabinet Material	Double door Aluminum Fix Cabinet
Driver IC	MBI5034 IC
Best View Distancing	10-300m
Viewing Angle (H/V)	160°/160°
Brightness	8000 cd/m <sup>2</sup>
Brightness Adjustment	Manual, 256 level; Auto, 8 levels
Grey Scale	16,384 Shades Per Color
Scan Mode	1/2 static
Color Temperature	6500K ±500
Display Colors	16.8 millions
Frame Rate	> 60 fps
LED Lifetime	> 100,000 hours
MTBF	> 100,000 hours
Power Supply	AC110V~AC240V @50Hz/60Hz
Power Consumption	Max: 750w/m <sup>2</sup> ; Average: 240w/m <sup>2</sup>
Refresh Rate	3840Hz
Data Transfer Method	RJ45
Ingress Protection Rating	IP67
Salt tolerance	NEMA 4x
Control Distance	120m (no repeating); Optical fiber transmission: 500m - 10km
Operating Temperature	-30°C ~ +60°C (Non-condensing)
Operating Humidity	10% ~ 95%RH (Non-condensing)
Storage Temperature	-30°C ~ +60°C (Non-condensing)
Storage Humidity	10% ~ 95%RH (Non-condensing)
Screen Weight	38 kg/m <sup>2</sup>

For technical or sales support, please visit:

[www.starviewint.asia](http://www.starviewint.asia)

*Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.*

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact [info@starviewint.asia](mailto:info@starviewint.asia)

Copyright © 2025 STARVIEW ASIA. All rights reserved.  
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia