

SA-PL1.5

INDOOR LED VIDEO WALL

DESCRIPTION


The Starview SA-PL1.5 Indoor LED a line of fixed LED screens in the indoor, offers a wide variety of sizes to meet the needs of any project. Our indoor LED displays are sharp, stunning and designed to excel in high ambient light environments, capturing audiences' attention and helping you provide an unforgettable experience.

The Starview SA-PL1.5 Indoor LED is light weight and easy to handle enabling it to be an attractive solution for changing video walls or traditional video walls favoring a compact fine pitch solution. This full-colour fine-pitch LED display meets the needs of large screens in various indoor spaces.



FEATURE

- Indoor 1.5mm Pixel Pitch
- Cabinet: 640mm(W) x 480mm(H)
- Die-cast Aluminum
- High refresh rate & gray scale to realize clear and smooth images
- Durable over 100,000 hours of LED Lifetime

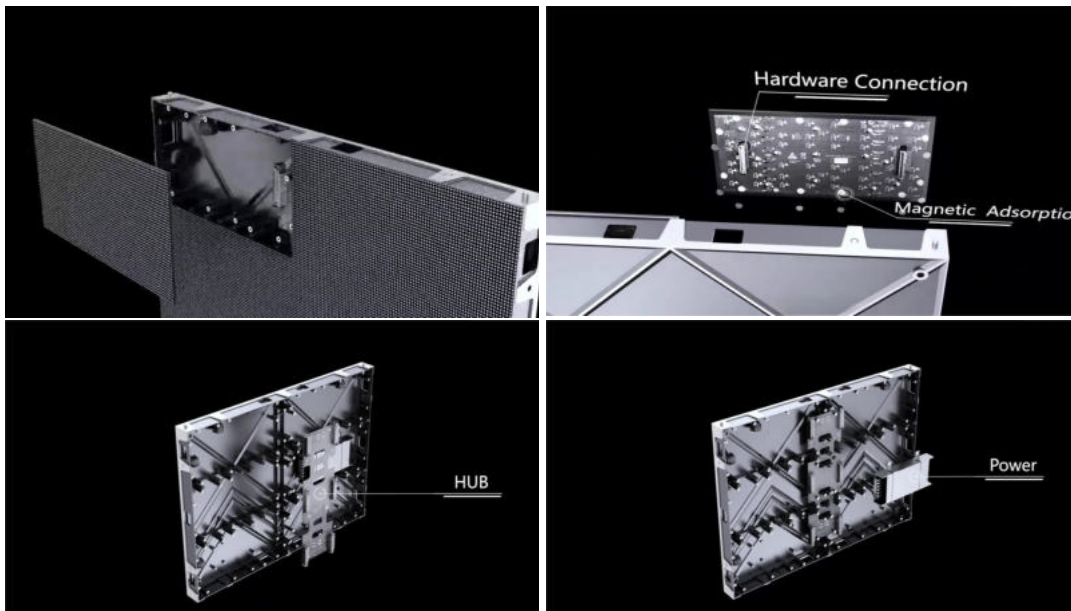

Technical specifications**SA-PL1.5**

LED Type	SMD1212 RGB 3 in 1	
Pixel Pitch	1.53 mm	
Physical Density	428,613 pixels/m ²	
Module Resolution (W x H)	209 × 105 pixels	
Module Size (W x H)	320 × 160 mm	
Cabinet Resolution (W x H)	418 × 314 pixels	
Cabinet Size (W x H) (Customizable)	640 × 480 mm	
Cabinet Weight	7.5 kg	
Maintenance Method	Front service	
Cabinet Material	Die-cast Aluminum	
Lifespan	≥100,000 hours	
Brightness	800 cd/m ²	
Viewing Angle	160°/160°	
The Best Viewing Distance	≥1.53m	
Drive Mode	1/52 Scan	
Display Color	16 bit	
Refresh Rate	3840 Hz	
Frame Rate	50&60 Hz	
Color Temperature	3000 - 10,000°K (adjustable)	
Contrast Ratio	5,000:1	
Driver IC	CFD655A IC	
Processor Platform/Receiving Card	Starview P4u	
Interface (Cabinet)	Power Supply (in/out)	AC power connection port (1/1)
	Signal (in/out)	RJ45 Ethernet (1/1)
Max Power Consumption	500 W/m ²	
Average Power Consumption	165 W/m ²	
IP Rating (Front/Rear)	IP43	
Input Power	AC110 - 240V, 50/60 Hz	
Working Temperature/Humidity	-20 - 50°C / 10% - 80%	
Storage Temperature/Humidity	-20 - 50°C / 10% - 80%	
Certification*	CE-EMC; CE-LVD, RoHS	

*The listed certifications are issued for markets in different regions. For the current status of the listed certifications in your region, please contact an authorized Starview representative.

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia