

SFC SERIES

INTERACTIVE FLOOR LED DISPLAY

INTERACTIVE FLOOR LED DISPLAY

Interactive floor LED display is an ideal choice for brand owners or sellers to interact with customers. Among all similar products, Starview SFC series interactive floor LED display out with its unique competitive advantages. The extremely short response time, high stability, and wide viewing angle entitle this interactive floor LED display to provide customers with an outstanding interactive experience.



FEATURE



Ultra-high strength and anti slip

Floor LED display is made of imported PC materials. It has high wear resistance, flexibility, and excellent resistance to high and low temperatures.




Super load bearing ability

According to mechanical design, the ultimate bearing capacity of each square meter of floor tile screen can reach up to 2 tons.



Fast reaction

The system uses a highly integrated design, take the induction device integrates into each module. It has a high sensing accuracy and has a fast response in only 0.015-second speed.

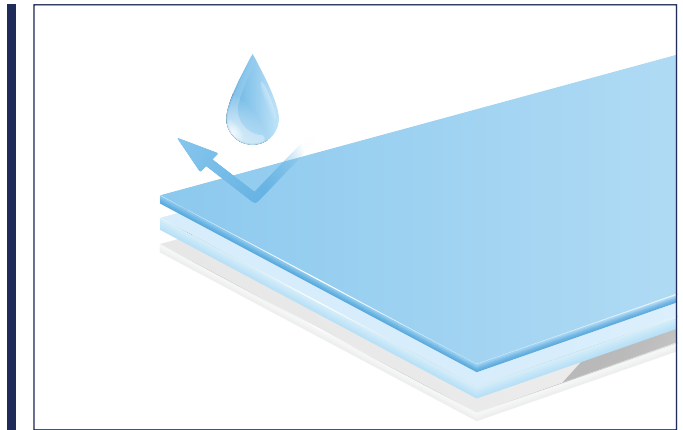

Waterproof

Special waterproof and moisture-proof materials. It is used for the bottom shell housing, power line, and signal line of the floor tile module. It is made of raw material with a moisture absorption coefficient.

Technical specifications
SFC SERIES FLOOR LED DISPLAY

Model	SFC-P25	SFC-P29-A	SFC-P29-B	SFC-P39A	SFC-P39B	SFC-P48	SFC-P52	SFC-P62
Product	Indoor & Semi-outdoor Intelligence Interactive Dance Floor Led Display							
Chip of LED	Nationstar/ Kinglight							
LED Configuration	SMD1415	SMD1415	SMD1415	SMD1921	SMD1921	SMD1921	SMD1921	SMD1921
Pixel Pitch (mm)	2.5	2.97	2.97	3.91	3.91	4.81	5.2	6.25
Cabinet Dimension (W x H, mm)	500 x 500	500 x 500/ 500 x 1000	500 x 500/ 500 x 1000	500 x 500/ 500 x 1000	500 x 500/ 500 x 1000	500 x 500/ 500 x 1000	500 x 500/ 500 x 1000	500 x 500/ 500 x 1000
Cabinet Resolution (W x H)	200 x 200	168 x 168/ 168 x 337	168 x 168/ 168 x 337	128 x 128/ 128 x 256	128 x 128/ 128 x 256	104 x 104/ 104 x 208	96 x 96/ 96 x 192	80 x 80/ 80 x 160
Cabinet Area (m ²)	0.25	0.25/ 0.5	0.25/ 0.5	0.25/ 0.5	0.25/ 0.5	0.25/ 0.5	0.25/ 0.5	0.25/ 0.5
Flatness (mm)	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1
Brightness (Cd/m ²)	2200	2200	1400	2000	1500	2000	1800	1600
Display colors	4.39 trillion (14-bit)							
Viewing Angle (H/V)°	160/140	160/140	160/140	160/140	160/140	160/140	160/140	160/140
Brightness Uniformity	≥98%	≥98%	≥98%	≥98%	≥98%	≥98%	≥98%	≥98%
Contrast Ratio	5000:1	5000:1	5000:1	7000:1	5000:1	5000:1	5000:1	5000:1
Input Voltage(V)	AC100 ~ 240V (50-60Hz)							
Pixel Density (Point/m ²)	160,000/m ²	112,896/m ²	112,896/m ²	65,536/m ²	65,536/m ²	43,264/m ²	36,864/m ²	25,600/m ²
Power Consumption (max/m ²)	800W	800W	800W	800W	800W	800W	800W	800W
Scan Mode	1/25	1/21	1/42	1/16	1/32	1/13	1/12	1/10
Refresh Rate	3840	3840	1920	3840	1920	3840	3840	3840
Interactive Response Time	0.015 ms							
Load Bearing	up to 2,000 kg/m ²							
Operating Temperature	-30° ~ 60°C							
Operating Humidity	10% ~ 95%RH							

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia