

V SERIES

COMMERCIAL DISPLAY



STARVIEW COMMERCIAL DISPLAY

With best-in-class picture quality and exceptional durability, Starview commercial displays elevate the conventional viewing experience, helping businesses deliver content that engages, informs and entertains.

DESCRIPTION

Starview V Series LCD Video Wall has immediate benefits for Security Room, Retail, Shopping Mall, Corporation, Broadcast, Transportation, Government, Health Care, and more. It is an excellent choice for command & control centers, corporate, AV and digital signage applications.



Video Walls for Security, Control Rooms, Commercial AV, Professional AV & has immediate benefits for:

In addition, this solution can also be used for corporate AV and Digital Signage applications such as shopping malls, airports, stadiums, lobby signage, boardrooms, and more. Whether small lobby display or extra-large video walls, the tiled Starview V Series makes statement. Public Display Signage receives 10 times the eye contact of static signage and is creating cost-effective opportunities to improve customer service, safety, way finding, branding, training, and communications. LCD video walls require less power consumption and with auto pixel shift built in they are not subject to permanent, irreversible burn-in. Unlike individual mount LCD's that leave gaps between each monitor, tiled video walls offer more flexibility, scalability and the possibility for a higher resolution.

- Unlike traditional signage or video screens, video walls bring the perfect solution to business for their specific demands. They can be modified to provide the best performance for each unique business environment.
- Starview's video walls have a constant pixel density regardless of the array size; enlarging the array just raise up the overall resolution of the video walls. This means our video walls can project brilliant imagery even when look over at a close distance.

FEATURES

- Up to 4k resolution
- Brightness 500 nits
- Designed for 24/7 operation
- 25% Haze, 3H
- Auto gamma and HDR calibration
- Slim bezel width of 0.88/1.7 mm
- Landscape & portrait installation support
- VESA mounting interface
- High-definition, bright and seamless visuals with wide viewing angles
- Built-in Daisy Chain Video Wall Controller: With each LCD panel built-in Daisy Chain Video Wall Controller to configure the displays into daisy chains as large as 2x2, 3x3, 4x4 or any array without requiring expensive external graphic cards or video processor. Implement configurations based on daisy chain through the signal loop.



Maintain continuous content delivery through a durable, reliable design

A pioneering thin design

As video wall configuration expand, the elimination of bordering bezel allows content to flow uninterrupted across multiple screens, resulting in a clearer, and more impactful showcase for featured messages.

Continuous image quality in any environment

Combined with non-glare panels, Starview's displays can delivery vivid, highly-visible content to audiences under even the strongest light sources.


APPLICATIONS



Meeting Room



Control Room

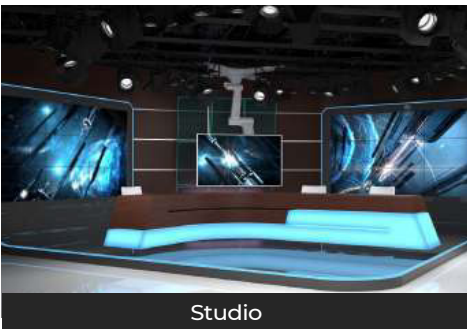

Studio



Retail



Lobby

Technical specifications

V SERIES LCD VIDEO WALL

Model	STVS-VM46L	STVS-VM55L	STVS-VP55L	STVS-VE65L
Active Screen Diagonal	46"	55"	55"	65"
Panel Dimension (W x H, mm)	1018.08 x 572.67	1211.3 x 682.1 (±1.7)	1210.8 x 681.5	1428.48 x 803.52
Total Bezel Width (mm)	1.7	1.7	0.88	3.5
Panel Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)	1920 x 1080 (16:9)	3840 x 2160 (16:9)
Brightness	500 cd/m ²			
Contrast Ratio	1200:1			
Viewing Angle (H/V)	178°/178°			
Display Color	16.7 million			
Response Time	8 ms			
Operation Time	24/7			
Life time	60,000 hrs			
MTBF	60,000 hrs			
Haze Value	-	25%, 3H	25%, 3H	-
Interface	HDMI In: x2 (HDMI 2.0) DP In: x2 (DP 1.2) DP Out: x1 (Daisy Chain, up to 4K input) Audio Out: x1 (3.5mm stereo jack) RS232 In: x1 (RJ45, Common used for IR in) RS232 Out: x1 (RJ45 RJ45, Support IR OUT) USB: x1 (2.0, Firmware update only)			
Power Supply	AC 100 ~ 240V, 50/60 Hz			
Power Consumption	165W (Typ)	240W(Typ)	240W (Typ)	300W (Typ)
Power Consumption (Stand by)	≤0.5W	≤0.5W	≤0.5W	≤0.5W
Working Temperature	0°C ~ 40°C	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 40°C
Working Humidity	20 ~ 80% RH	10 ~ 80% RH	10 ~ 80% RH	20 ~ 80% RH

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
 Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia


Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
Storage Humidity	10 ~ 80% RH	5 ~ 90% RH	5 ~ 90% RH	10 ~ 80% RH
Color	Black			
Body Size (mm)	1020.08 x 574.57 x 95.5	1211.3 x 682.1 x 72	1213.5 x 684.3 x 94.39	1432.58 x 807.62 x 115.1
Package Size (mm)	1019.26 x 573.75 x 95.5	1360 x 840 x 240	1360 x 840 x 240	1595.8 x 1000 x 275.8
Set Weight	22.4 kg	27.9 kg	27.9 kg	29 kg
Package Weight	30.4 kg	36.4 kg	36.4 kg	44.2 kg
VESA Mounting (mm)	400 x 400	400 x 400	400 x 400	600 x 400

AUTO GAMMA AND HDR CALIBRATION




DIMENSIONS

STVS-VM46L

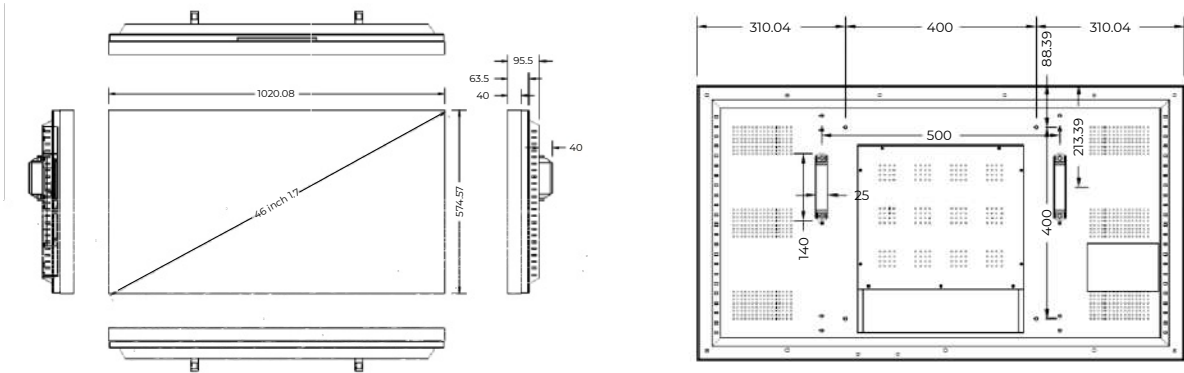

STVS-VM55L

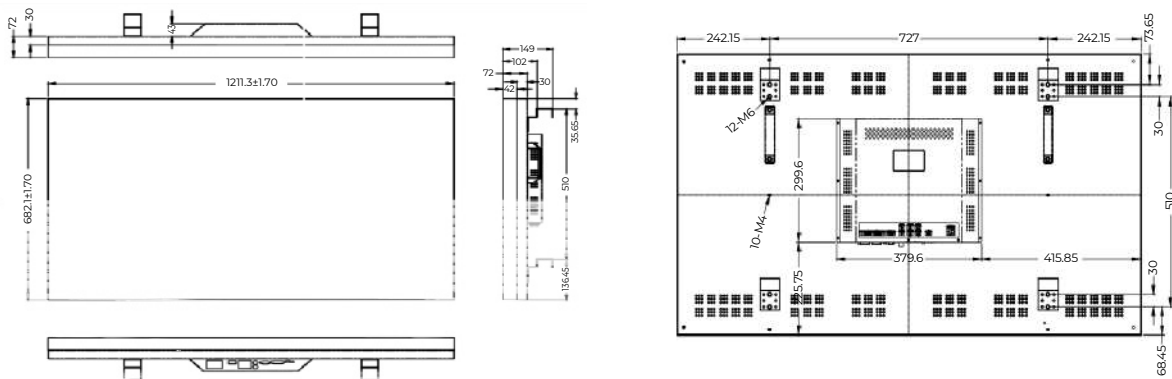

For technical or sales support, please visit:



www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.



For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

STVS-VP55L

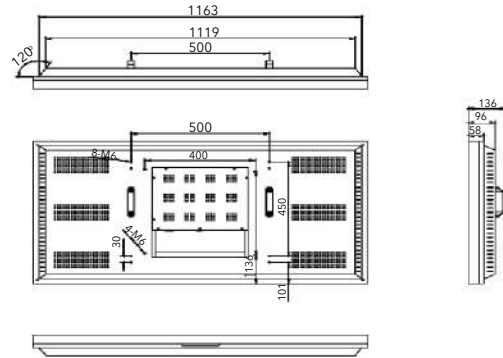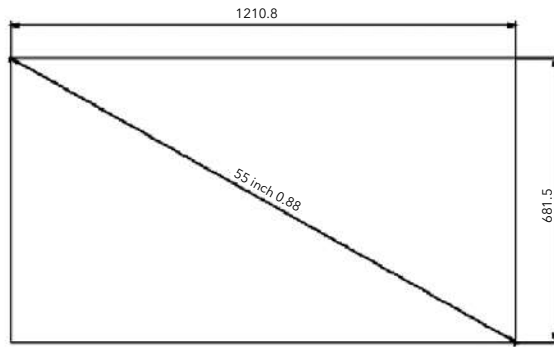

STVS-VE65L

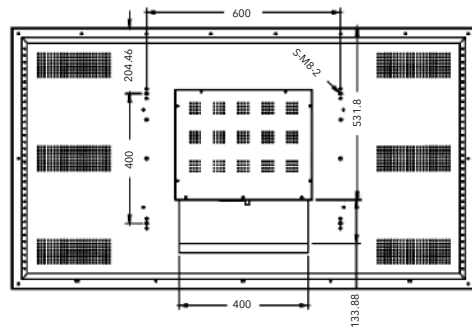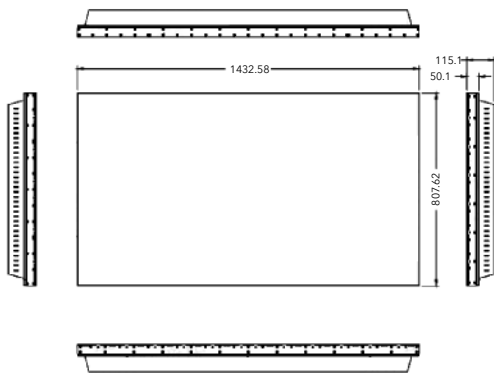

V SERIES PRO

MONITOR



DESCRIPTION


The Starview V Pro Monitor Series with highly durable design that can operate continuously for many hours even in harsh environments; power saving design and thin housing design that contributes to beautiful screen power saving with UHD panel & slim bezel.

UHD resolution guarantee eye-pleasing image quality for ergonomic viewing and versatile digital connectivity optimized to the needs of corporate and signage applications.

The Starview V Series Pro Monitor can be use in a variety of settings, including classrooms at all levels of education, in corporate board rooms and work groups, in training rooms for professional sports coaching, in broadcasting studios and others.


FEATURES

- UHD resolution with 350nits
- Multiple input interface for versatile application
- Stylish design and built-in speakers
- Tempered glass for protection
- OPS slot available
- Designed for 24/7 operation



Fast Response

With a fast 8ms response time, blur, ghosting and distortion will be eliminated, giving way to a perfect dynamic picture.



Wide Viewing Angle

Expanded vision with 178 degrees viewing angle, no deformed pictures and no color distortion, perfect viewing.



Material

Our full metal shielding structure will prevent any exterior electromagnetic interference.



High Quality Audio

Our units are equipped with high quality digital audio outputs.



High Definition Displays

Only professional/ commercial grade A+ are used for our products. High brightness and contrast ratios are the key in delivering great visible advertising.



Intelligent temperature control system

Our intelligent temperature control system will regulate and protect the equipment. Keeping the unit performance at peak level.

APPLICATIONS



Business Meeting



Video Conference



Broadcasting Studio



Lobby

Technical specifications

Model	STVS-P65Z	STVS-P75Z	STVS-P86Z	STVS-P98Z	STVS-P110Z
Active Screen Diagonal	65"	75"	86"	98"	110"
Active Display Area (W x H, mm)	1427.8 x 803	1650 x 927.9	1896.2 x 1066.7	2159 x 1214	2436.48 x 1370.52
Resolution	UHD 3840 x 2160				
Aspect Ratio	16 : 9				
Display Colors	10 bit, 1.07 billion colors				
Backlight	D-LED				
Brightness	350 cd/m ²				
Contrast	1200 : 1				
View Angle	178° H/V				
Response Time	8 ms				
Lifetime	50,000 hrs				
Input	HDMI x2, AV x1, VGA + Audio x1, USB-B x1, USB-A 2.0 x1, RS232 x1				
Output	SPDIF x1, AV x1, Earphone x1				
Built-In Speaker	2 x 10W (8Ω)				
Power Supply	AC 100 ~ 240V, 50/60Hz				
Power Consumption	≤ 200W	≤ 300W	≤ 400W	≤ 500W	≤ 750W
Power Consumption (Stand by)	< 0.5W				
Working Temperature	0°C - 45°C				
Working Humidity	10 ~ 90% RH				
Storage Temperature	-20°C ~ 60°C				
Storage Humidity	10 ~ 90% RH				
Tempered Glass	3.2 mm			4 mm	
Dimension (W x H x D, mm)	1483.2 x 858.4 x 82	1705.4 x 983.8 x 82.2	1951.6 x 1122.4 x 89.8	2222.4 x 1280.4 x 91.3	2501.6 x 1440.8 x 93.1
Net Weight	33 ±2kg	46 ±2kg	57 ±2kg	83 ±2kg	117 ±2kg
VESA Mounting (mm)	500 x 400	600 x 400	800 x 400	800 x 600	1000 x 400
Package Dimension (W x H x D, mm)	1600 x 1015 x 186	1827 x 1151 x 193	2064 x 1281 x 206	2370 x 1452 x 245	2643 x 1636 x 290
Gross Weight	42 ±2kg	58 ±2kg	74 ±2kg	126 ±2kg	143 ±2kg

For technical or sales support, please visit:

www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia


Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

DIMENSIONS


STVS-P65Z

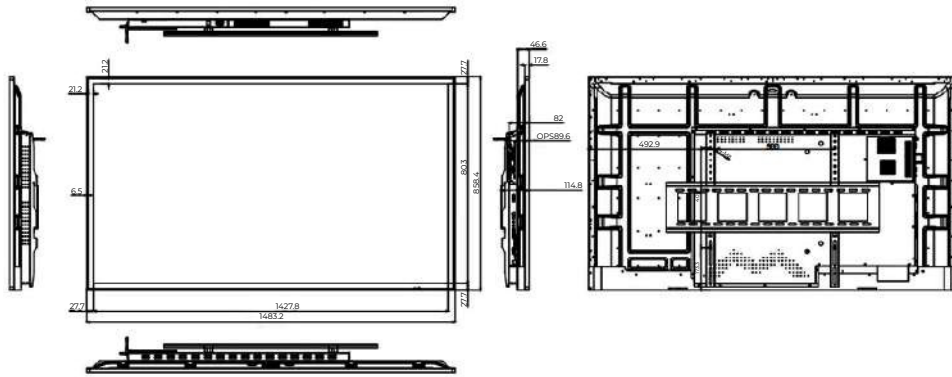

STVS-P75Z

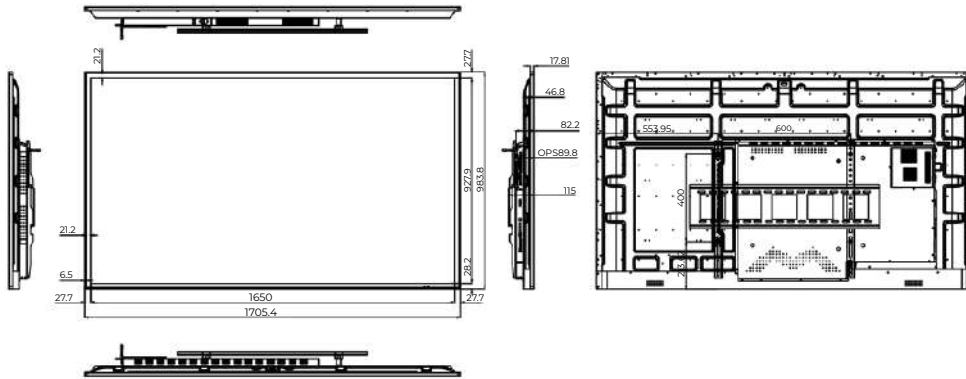

STVS-P86Z

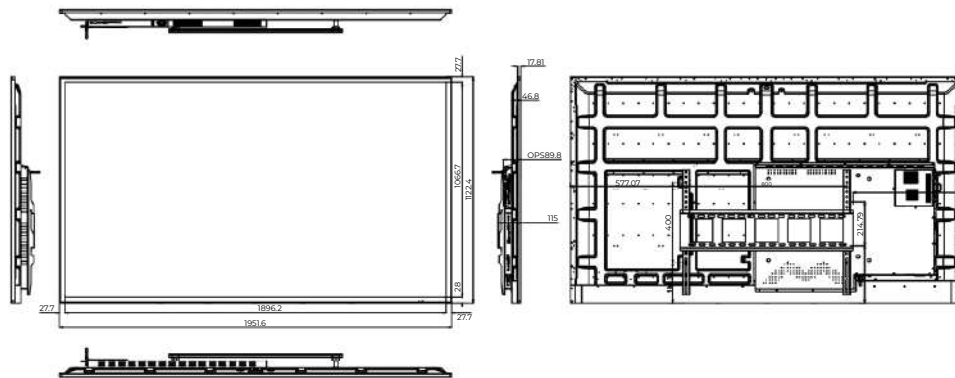


For technical or sales support, please visit:
www.starviewint.asia


For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact
info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
 Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

STVS-P98Z

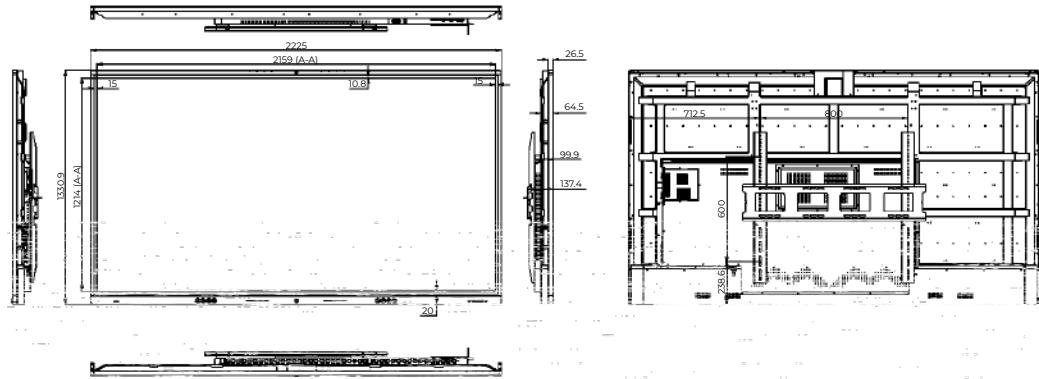

STVS-P110Z

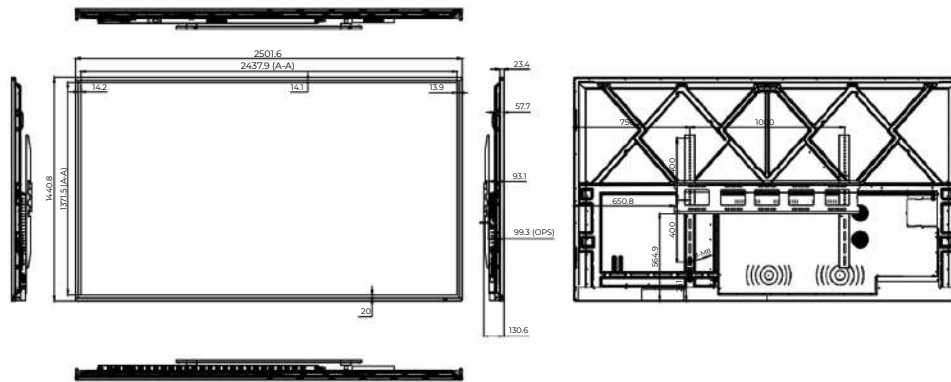

Unit: mm

V SERIES INTERACTIVE WHITE BOARD

WITH CAMERA AND MICROPHONE



DESCRIPTION

Starview V Series Interactive Whiteboard is a perfect solution for effective meetings, with advanced touch technology and high-performance system-on-chip. Starview will revolutionize the way you conduct business.

Available in sizes 65", 75", 86", 98" and 110". UHD resolution guarantee eye-pleasing image quality for ergonomic viewing and versatile digital connectivity optimized to the needs of corporate and signage applications.

It is widely used in modern education teaching, interactive business commerce presentations, meetings, medicine, army etc...

FEATURES


- UHD resolution with 350nits
- Zero bonding technology
- Slim design with Android 11.0
- Type C port available
- Built in camera and microphone (STVS-PxxEE-C series)
- Stylish design for internal speakers
- Powerful interactive board software
- Infrared touch technology
- OPS slot available



For technical or sales support, please visit:
www.starviewint.asia


For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

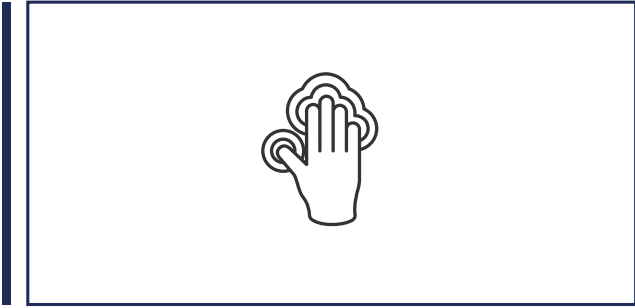

Multi-touch

Starview V Series IWB can simultaneously detect up to 20 points for multi-touch functionality.

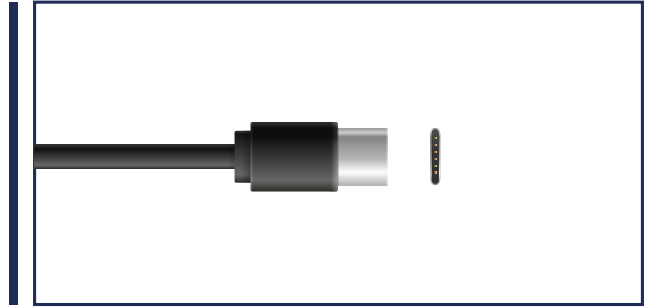


Type C Connection

USB-C connectivity simplifies connections which enables charging and sending data simultaneously over just one single cable.



Front Connectivity Design

Starview V Series IWB features front display ports and speakers, enabling content to be delivered easier with more immersive sound.

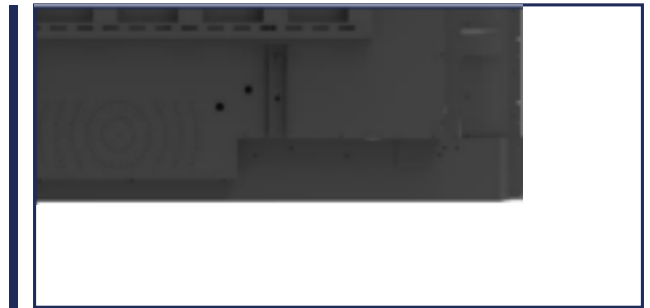

Built-in OPS Slot

Starview V Series IWB supports OPS slots, allowing you to easily and conveniently mount OPS desktop at the back of the Starview V Series IWB without the hassle of connecting to an external desktop, offering you more expanded functions

APPLICATIONS



Education



Business Meeting



Training



Childhood Education

Technical specifications

V SERIES INTERACTIVE WHITE BOARD SPECIFICATION

Model	STVS-P55EE	STVS-P65EE	STVS-P75EE	STVS-P86EE	STVS-P98EE	STVS-P110EE
Active Screen Diagonal	55"	65"	75"	86"	98"	110"
Active Display Area (Wx H, mm)	1213.0 x 682.5	1429.5 x 804.5	1650.6 x 928.7	1896.02 x 1067.1	2158.85 x 1214.35	2436.48 x 1370.52
Resolution	UHD 3840 x 2160					
Aspect Ratio	16 : 9					
Display Colors	10 bit, 1.07 billion colors					
Backlight	D-LED					
Brightness	350 cd/m ²					
Contrast	1200 : 1					
Viewing Angle	178° H/V					
Response Time	8 ms					
Life time	50,000 hrs					
RAM/ROM	4/8Gb DDR + 32/64/128Gb EMMC					
CPU	Quad-core ARM Cortex A55 @1.9GHz					
GPU	ARM Mali G52 MP2(2EE) @900M					
NPU	2.6TOPs					
Input	HDMI IN x1, Mini AV x2, RJ45 x1, RS232 x1, USB-A 2.0 x1, USB-A 3.0 x1, USB-B x1				HDMI IN x2, AV IN x1, DB9 (RS232) x1, RJ45 IN x1, USB A 2.0 x1, USB-A 3.0 x1, USB-B x1	
Output	SPDIF x1, Mini AV x1, Earphone x1				AV OUT x1, SPDIF OUT x1, Earphone x1	
Front Connection	HDMI IN x1, USB-A x2, USB-B x1, USB-C x1				USB-A 2.0 x1 (Touch), HDMI IN x1, USB-A 3.0 x3	
Wifi	8188: IEEE 802.11b/g/n; 8822: IEEE 802.11a/b/g/n/ac; BT5.0					
Built-In Speaker	2 x 15W (8Ω)					
Touch Points	20					
Response Time	<6 ms					
Touch Accuracy	±1.0mm (90% Area)					
Tempered Glass	3.2mm with AG Coating				4mm with AG Coating	
Input Mode	Finger/Opaque objects					
Cursor Speed	100 dot/s					
Transmission Connector	USB 2.0					
Operating System	Windows/Linux/Mac/Android					
Power Supply	AC 100 ~ 240V, 50/60Hz					
Power Consumption	≤ 170W	≤ 200W	≤ 300W	≤ 400W	≤ 400W	≤ 850W
Power Consumption (Stand by)	< 0.5W					
Dimension (WxHxD, mm)	1266.6 x 773.3 x 91.2	1483.4 x 875.6 x 87.5	1705.2 x 1000.8 x 87.7	1951.4 x 1138.5 x 87.8	2225 x 1330.9 x 99.9	2501.2 x 1487.3 x 97.15
Net Weight	30 ±2kg	37 ±2kg	50 ±2kg	66 ±2kg	98 ±2kg	115 ±2kg
VESA Mounting (mm)	400 x 400	500 x 400	600 x 400	800 x 400	800 x 600	1000 x 400
Package Dimension (W x H x D, mm)	1360 x 840 x 240	1600 x 1015 x 186	1827 x 1151 x 193	2064 x 1263 x 206	2410 x 1660 x 350	2635 x 1635 x 300
Gross Weight	37 ±2kg	47 ±2kg	62 ±2kg	78 ±2kg	143 ±2kg	142 ±2kg
Working Temperature	0°C - 45°C					
Working Humidity	10 ~ 90% RH					
Storage Temperature	-20°C ~ 60°C					
Storage Humidity	10 ~ 90% RH					

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
 Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

Technical specifications

V SERIES INTERACTIVE WHITE BOARD

Model	STVS-P65EE-C	STVS-P75EE-C	STVS-P86EE-C	STVS-P98EE-C	STVS-P110EE-C
Active Screen Diagonal	65"	75"	86"	98"	110"
Active Display Area (W x H, mm)	1429.5 x 804.5	1650.6 x 928.7	1896.02 x 1067.1	2158.85 x 1214.35	2436.48 x 1370.52
Resolution	UHD 3840 x 2160				
Aspect Ratio	16 : 9				
Display Colors	10 bit, 1.07 billion colors				
Backlight	D-LED				
Brightness	350 cd/m ²				
Contrast	1200 : 1				
View Angle	178° H/V				
Response Time	8 ms				
Life time	50,000 hrs				
O/S	Android 11.0			Android 13.0	
RAM/ROM	4/8Gb DDR + 32/64/128Gb EMMC				
CPU	Quad-core ARM Cortex A55 @1.9GHz				
GPU	ARM Mali G52 MP2(2EE) @900M				
NPU	2.6TOPs				
Input	HDMI IN x1, Mini AV x2, RJ45 x1, RS232 x1, USB-A 2.0 x1, USB-A 3.0 x1, USB-B x1			HDMI IN x2, AV IN x1, DB9 (RS232) x1, RJ45 IN x1, USB A 2.0 x1, USB-A 3.0 x1, USB-B x1	
Output	SPDIF x1, Mini AV x1, Earphone x1			AV OUT x1, SPDIF OUT x1, Earphone x1	
Front Connection	HDMI IN x1, USB-A x2, USB-B x1, USB-C x1			USB-A 2.0 x1 (Touch), HDMI IN x1, USB-A 3.0 x3	
Wifi	8188: IEEE 802.11b/g/n; 8822: IEEE 802.11a/b/g/n/ac; BT5.0				
Built-In Speaker	2 x 15W (8Ω)				
Built-In Camera / Microphone	13 MP / 8 Array			13MP Fixed Lens / 8 Array up to 8m Pickup Distance	
Touch Points	20				
Response Time	<6 ms				
Touch Accuracy	±1.0mm (90% Area)				
Tempered Glass	3.2mm with AG Coating			4mm with AG Coating	
Input Mode	Finger/Opaque objects				
Cursor Speed	100 dot/s				
Transmission Connector	USB 2.0				
Operating System	Windows/Linux/Mac/Android				
Power Supply	AC 100 ~ 240V, 50/60Hz				
Power Consumption	≤ 200W	≤ 300W	≤ 400W	≤ 400W	≤ 850W
Power Consumption (Stand by)	< 0.5W				
Dimension (W x H x D, mm)	1483.4 x 875.6 x 87.5	1705.2 x 1000.8 x 87.7	1951.4 x 1138.5 x 87.8	2225 x 1330.9 x 99.9	2501.2 x 1487.3 x 97.15
Net Weight	37 ±2kg	50 ±2kg	66 ±2kg	98 ±2kg	115 ±2kg
VESA Mounting (mm)	500 x 400	600 x 400	800 x 400	800 x 600	1000 x 400
Package Dimension (W x H x D, mm)	1600 x 1015 x 186	1827 x 1151 x 193	2064 x 1263 x 206	2410 x 1660 x 350	2635 x 1635 x 300
Gross Weight	47 ±2kg	62 ±2kg	78 ±2kg	143 ±2kg	142 ±2kg
Working Temperature	0°C - 45°C				
Working Humidity	10 ~ 90% RH				
Storage Temperature	-20°C ~ 60°C				
Storage Humidity	10 ~ 90% RH				

For technical or sales support, please visit:

www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia


Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

DIMENSIONS


STVS-P65EE

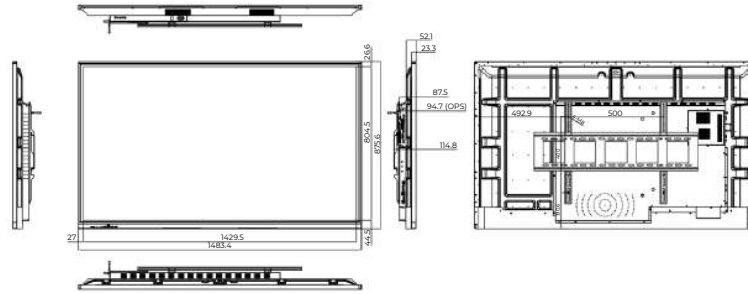


STVS-P75EE

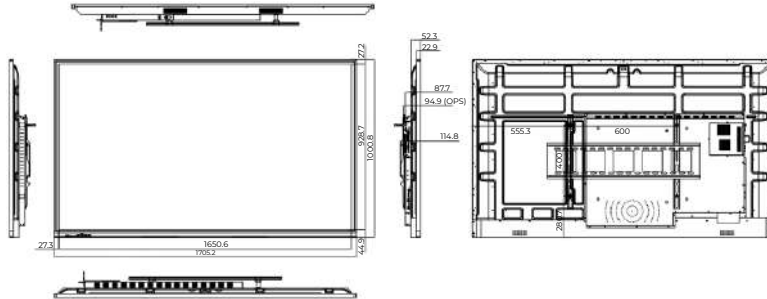


STVS-P86EE

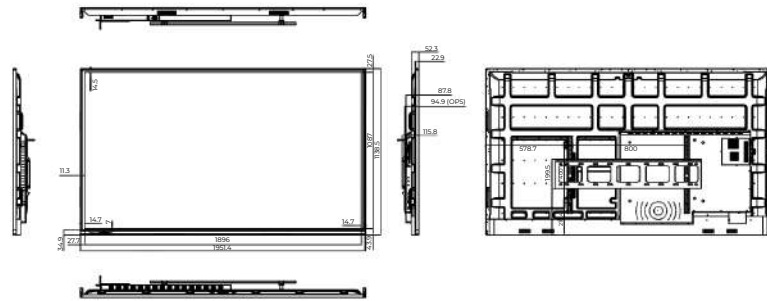

STVS-P98EE

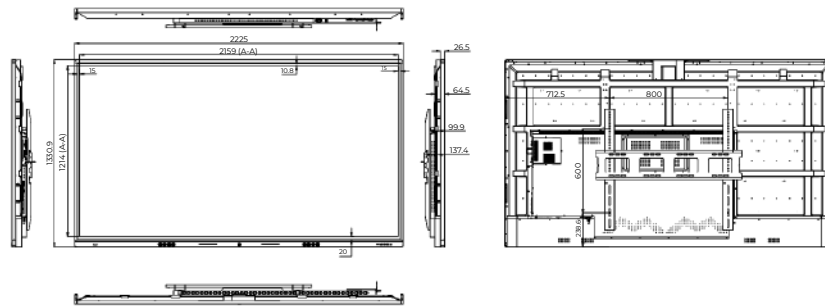


STVS-P110EE

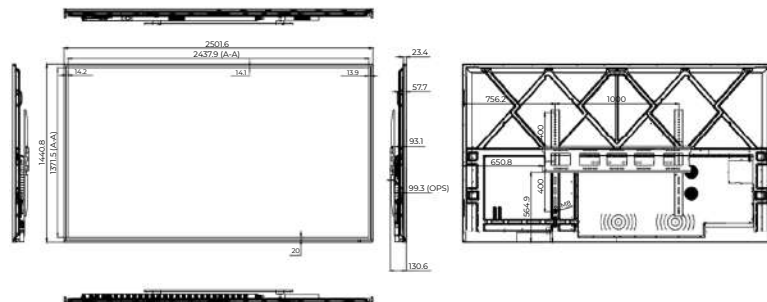


Unit: mm


STVS-P65EE-C

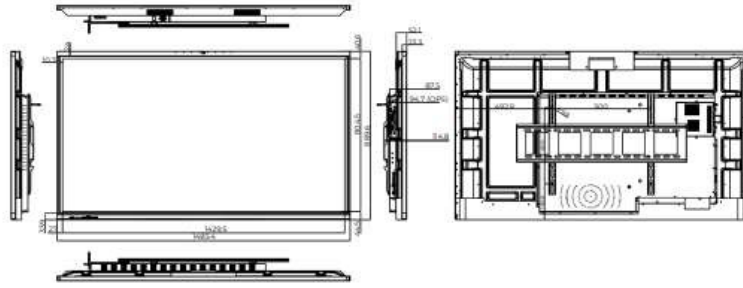


STVS-P75EE-C

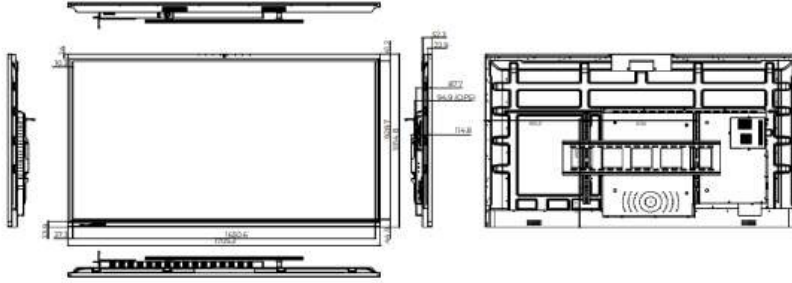


STVS-P86EE-C

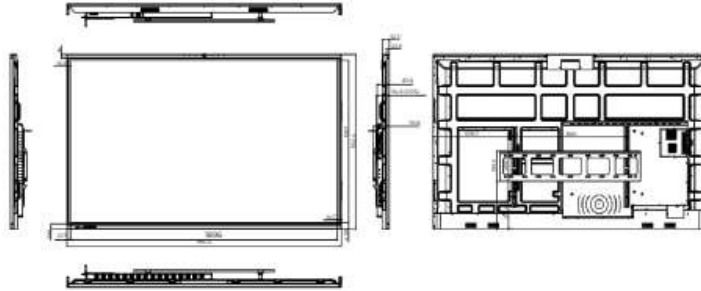

STVS-P98EE-C

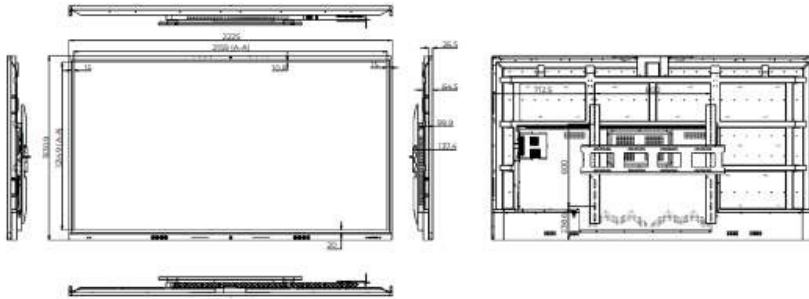

STVS-P110EE-C

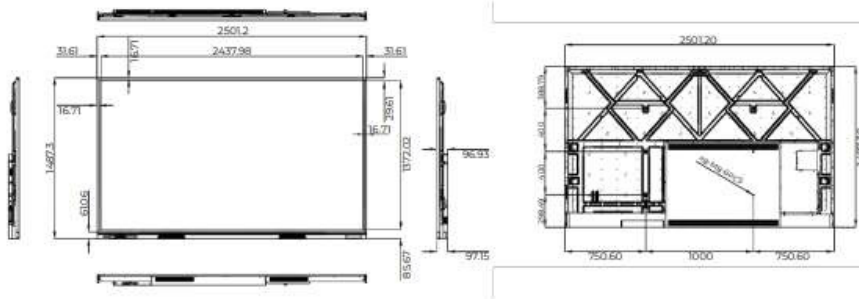

Unit: mm



For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia