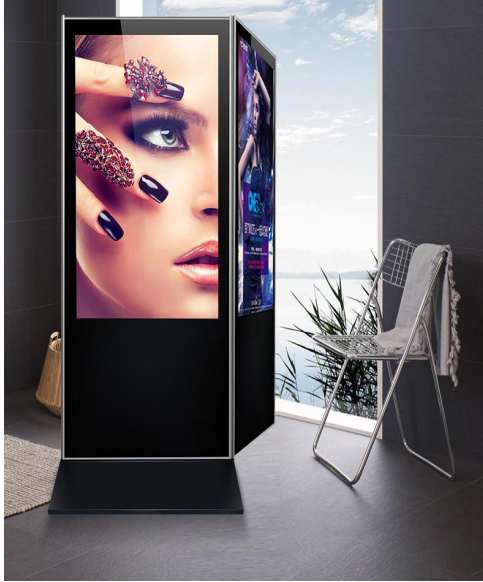


K-HD Double Side Series

Digital Signage Kiosk











DESCRIPTION

High definition FHD commercial grade portrait kiosk designed for 24/7 applications.

Catch pedestrian attention in both directions with this large format, 2-sided touch screen digital poster kiosk to increase customer engagement and enhanced experience. As an interactive advertising and display solution, these double-sided screens work independently, allowing you to showcase different images, videos and slideshows on each side at the same time.

This commercial multimedia device provides an alternative to traditional signage, making it the ideal display solution tool in public venues, tradeshows, and business institutes.

FEATURE

	<p>Easy upgradable options available: Android, Windows and network.</p>		<p>With a fast 5ms response time, blur, ghosting and distortion will be eliminated, giving way to a perfect dynamic picture.</p>
	<p>By using the visual extension technology (S-PVA) it will give an easy 178 degrees viewing angle. No deformed pictures and no color distortion, perfect viewing.</p>		<p>Only professional/ commercial grade A+ are used for our products. High brightness and contrast ratios are the key in delivering great visible advertising.</p>
	<p>Our intelligent temperature control system will regulate and protect the equipment. Keeping the unit performance at peak level.</p>		<p>Our units are equipped with high quality digital audio outputs</p>
	<p>Equipped with 3D reduction technology.</p>		<p>Our full metal shielding structure will prevent any exterior electromagnetic interference</p>

Technical specifications

K-HD Double Side Series

Model		K432-HD	K552-HD	K652-HD	K752-HD	K862-HD
LCD panel	Screen Size	43"	55"	65"	75"	86"
	Resolution	1920x1080 (16:9)				
	Display Colors	8 bit, 16.7M colors				
	Refresh Rate	60Hz				
	Brightness	400 nits (cd/m ²)				
	Contrast Ratio	4000:1				
	Lifetime	60,000 hours				
	Viewing Angle	178° H/V				
	Response Time	5ms				
	Backlight	Direct-lit LED				
	Runtime	24/7				
Touch Screen (Optional)	Touch Screen Type	Capacitive				
	Multi Touch	10 points				
	Writing Style	Responds to finger, gloved hand or pointer				
Environment	Operating Temperature	-5°C ~ 60°C				
	Operating Humidity	10% ~ 80%				
Camera	20MP Camera built in (Optional)					
OS	Android 4 core RK3288 or Windows (Optional)					
3G/4G	Optional					
Structure	Material	Aluminum profile				
	Glass	Tempered glass				
Power	Supply	110 ~ 240V AC, 50/60Hz				
	Consumption	100W Max, < 3W Standby				
Connectivity	Lan, Wifi					

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia