



SA-SPR SERIES

PERIMETER OUTDOOR LED SIGNAGE



FEATURE

- **Customized design is available**
 - All cables are hidden
 - Fastlock design makes screen installation quickly, it saves much time
- **IP65 Waterproof (Front & Rear)**
- **Adjustable angle, wide viewing angle**

Screen angel can be adjusted in 90°, 95°, 100°, 105°, 110°, 115°. The stand can be folded and hidden
- **Front & Rear maintenance**

Both front and back maintenance meets different site application



HIGHLIGHT



Enhancing the Value of Your Stadium

Elevate the value of your stadium and help support increased revenue by installing high-quality LED displays with enhanced resolution and refresh rates. Our state-of-the-art displays offer advertisers an attractive advertising space, while the crisp images and smooth video playback maximize advertising effectiveness. This can create opportunities for higher advertising rates, which can ultimately contribute to your venue's profitability.



Outstanding Visibility


With an impressive brightness of 6,500 nits, this bright display excels in outdoor environments, even under direct sunlight, effortlessly capturing attention and delivering content effectively. Additionally, it features a high refresh rate of 7,680 Hz, providing viewers with a clearer experience by minimizing black bars, blurring, and flickering that can commonly occur during video playback. Furthermore, the wide viewing angle enhances visibility for all spectators.



Meeting UEFA Requirements

Our perimeter LED displays are suitable for installation in UEFA stadiums. The SA-SPR series is designed to meet UEFA product requirements for reliable performance in high-pressure situations.

* The SA-SPR series meet the LED technical specification requirements announced by UEFA as of July 2024.

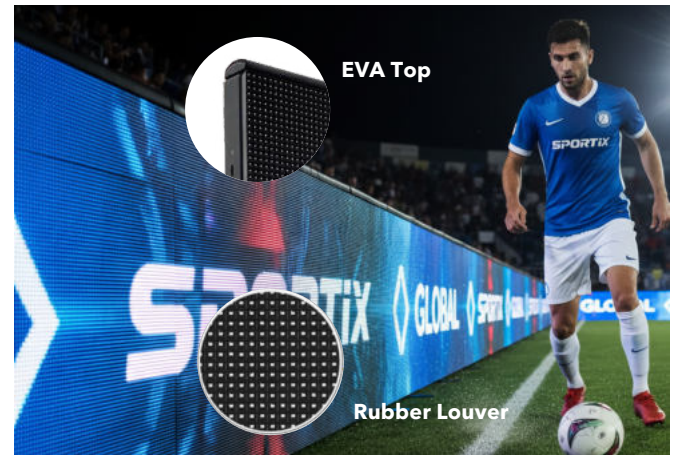

Stadium-Specific Design

Designed specifically for stadium installations, the SA-SPR series is equipped with safety features to protect players during games. Its sophisticated design incorporates protective elements, such as cushioning and rubber masks, to safeguard players on the field.

For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

DESIGNED TO BE COMPATIBLE WITH CHRISTIE'S IMAGE CONTROL SYSTEM

Starview SA-SPR Series

Supported control solution	Switchers and AV distribution	<ul style="list-style-type: none"> • Terra Controller • Terra Receiver • Terra Transmitter
	Video wall processors	<ul style="list-style-type: none"> • Hedra Standard • Hedra Pro-KVM • Hedra Pro-Video
	Image processors	<ul style="list-style-type: none"> • Spyder-S-Series • Mastering Gateway • Spyder X80

Products "SA-SPR Series" manufactured by Starview, are paired with Christie Terra Switchers and AV distribution

Solutions beyond matrix switching for AV-over-IP system architectures

Based on off-the-shelf 10G Ethernet components, the Terra solution allows for the design of simple, flexible and highly-scalable system architectures that deliver great performance and user experience at a drastically lower total cost of ownership.

- **Terra Transmitter** - Supply audiovisual sources and control signals with uncompressed, zero-frame latency, artifact-free content over 10G networks.
- **Terra Receiver** - Deliver audiovisual sources and control from an SDVoE system to displays and other devices. Benefit from full signal management including videowall magnification, KVM switching and extension, aspect ratio management, and Multiviewer for confidence monitoring.
- **Terra Controller** - The Christie Terra Controller gives you complete, secure operational control and management over Terra devices and SDVoE systems.



Christie Hedra

Paired with Christie Hedra Video wall processors

Whether it's mission-critical operations or monitoring sources for energy and utilities, your team needs to securely display, arrange, and operate multiple sources to make quick, informed decisions. And that's where the new Christie® video wall processors come in.

With Christie Hedra™, you get secure, real-time access to your data that you can control from virtually anywhere for seamless collaboration and sharing of critical information so you can make those decisions.

Paired with Christie Spyder Image processors

Deliver the highest quality content every time

No matter what your canvas is - a live event, sports venue, control room, or corporate space - Christie® image processors and compositors can deliver the highest quality content with the lowest latency.

Christie Spyder-S Series: A revolution in compositing and processing

The Spyder-S Series redefines everything you know about compositing and processing with a better solution for live events, sports venues, and broadcast. Featuring a modular, scalable technology that lets you scale your system by combining individual nodes for nearly limitless inputs, outputs, and megapixels with ultra-low latency. It's everything you need and nothing you don't.

Christie Spyder X80: Designed for demanding events

An undisputed leader in its class, Spyder X80 is a powerful multi-screen windowing processor that offers performance, control, and flexibility for the most demanding, spectacular experiences imaginable.




Christie Spyder

For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

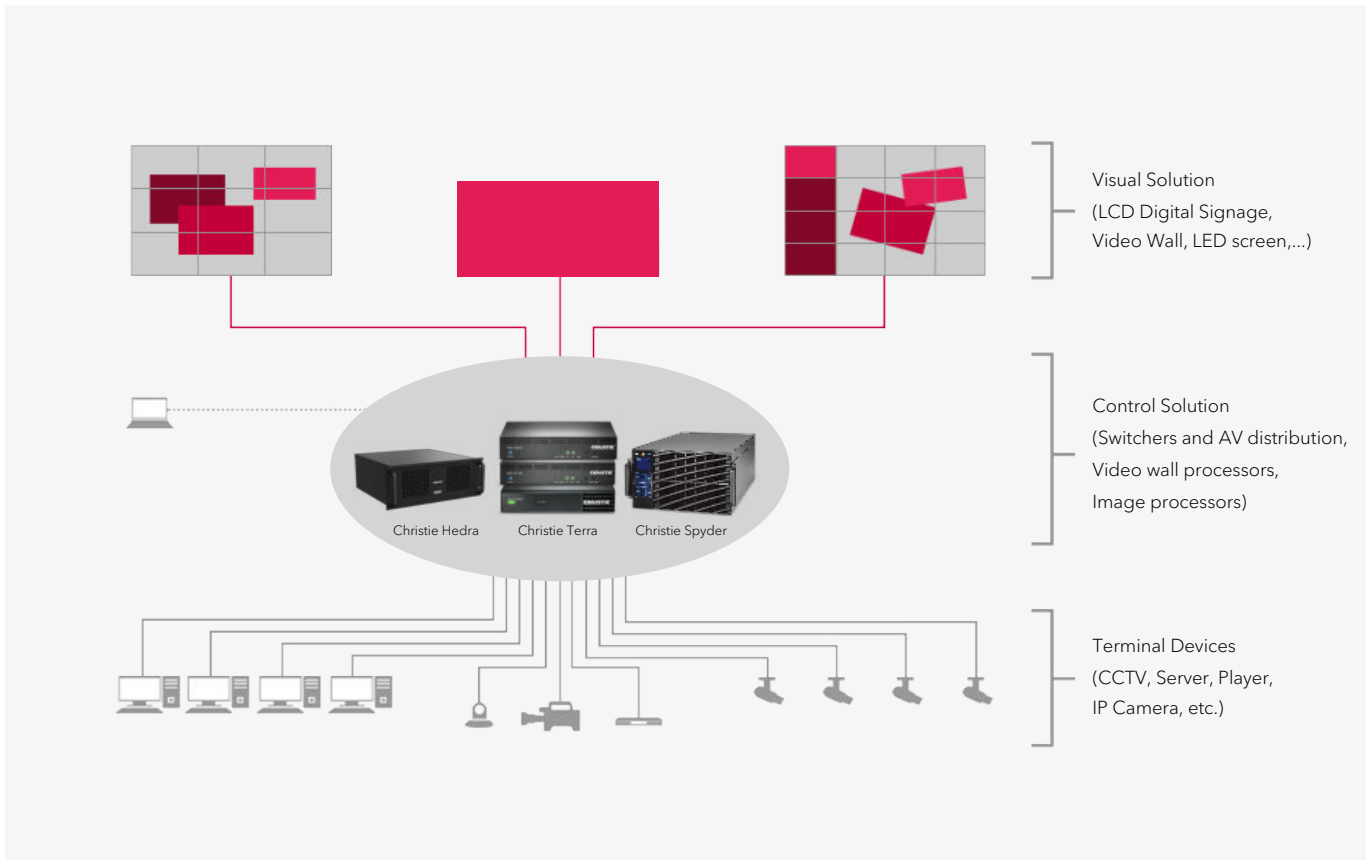

Technical specifications

SA-SPR Series

Model	SA-SPR-P6	SA-SPR-P8	SA-SPR-P10
Pixel Pitch	6.25 mm	8.33 mm	10 mm
LED Type	SMD2727	SMD2727	SMD2727
Physical Density (pixels/m ²)	25,600	14,400	10,000
Module Size (W×H)	400×300	400×300	400×300
Module Resolution (pixels)	64×48	48×36	40×30
Cabinet Size (mm) (Customize)	1600×900	1600×900	1600×900
Cabinet Resolution (pixels)	256×144	192×108	160×90
Cabinet Weight (kg)	45	45	45
Maintenance Mode	Front and Back maintenance	Front and Back maintenance	Front and Back maintenance
Cabinet Material	Die-casting Aluminium	Die-casting Aluminium	Die-casting Aluminium
Brightness (cd/m ²)	6,500	6,500	6,500
Color Temperature (K)	1,000-18,500 Adjustable	1,000-18,500 Adjustable	1,000-18,500 Adjustable
Viewing angle (H/V)	140°/160°	140°/160°	140°/160°
Display Color	14 bit	14 bit	14 bit
Contrast Ratio	10,000:1	10,000:1	10,000:1
Frame Rate (Hz)	50/60	50/60	50/60
Refresh Rate (Hz)	7,680	7,680	7,680
Lifetime (hour)	100,000	100,000	100,000
Drive Mode	Static, 1/6	Static, 1/3	Static, 1/2
The best viewing distance	6 -200m	8 -200m	10 -300m
Max Power Consumption (W/m ²)	780	780	780
Average Power Consumption (W/m ²)	250	250	250
IP Rating Front / Rear	IP65 / IP65	IP65 / IP65	IP65 / IP65
Input Power	AC90-264V,47-63 Hz	AC90-264V,47-63 Hz	AC90-264V,47-63 Hz
Working Temperature/Humidity	-20~60°C/10%~85%RH (non condensing)	-20~60°C/10%~85%RH (non condensing)	-20~60°C/10%~85%RH (non condensing)
Storage Temperature/Humidity	-20~60°C/10%~85%RH (non condensing)	-20~60°C/10%~85%RH (non condensing)	-20~60°C/10%~85%RH (non condensing)
Certification*	CCC / CE / ROHS / FCC / CB / TUV / IEC		

* The listed certifications are issued for markets in different regions. For the current status of the listed certifications in your region, please contact an authorized Starview representative.

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia