

# SA-NVR32IP



32CH 1.5U 4HDD NVR

## FEATURES

- Up to 32-ch IP cameras access
- Up to 1-ch@12MP/32-ch@D1 decoding capacity
- Support face recognition and multi-objective recognition
- Support 2 HDMI and 1 VGA interface
- 4 SATA hard disk each up to 16TB,
- 2 RJ45 10M/100M/1000M network interface
- Support RAID 5/6/10
- Smart search & playback
- Support cloud upgrade



## DIMENSIONS (MM)

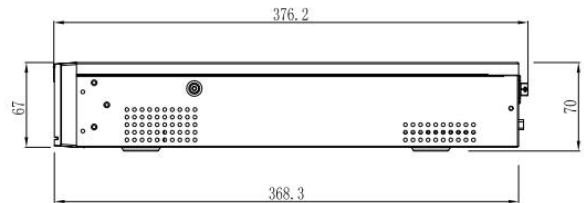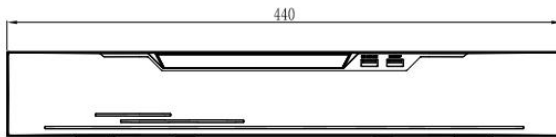

## REAR PANEL



**Technical specifications****SA-NVR32IP**

Video Input	IP Camera Input	32 Channel (Video, Video & Audio)
	Incoming Bandwidth	320Mbps
	Outgoing Bandwidth	320Mbps
Video Output	HDMI 1 Output	3840×2160, 1920×1080, 1280×1024, 1024×768
	HDMI 2 Output	1920×1080, 1280×1024, 1024×768
	VGA Output	1920×1080, 1280×1024, 1024×768
	Different Source Output	Support
	Decoding Capacity	1ch 12MP (25/30 fps), 4ch 4MP (25/30 fps), 9ch 1080P (25/30 fps), 16ch D1 (25/30 fps), 32ch D1 (25/30 fps)
	Dual Stream	Support
	Multi-screen Display	1st Screen: 1/4/8/9/16/32/36; 2nd Screen: 1/4/8/9/16
AI Recognition	Decoding Format	H.265, H.264
	Face Comparison	Real-time captured and display faces comparison results (registrant (name and ID), stranger, channel, similarity)
	Multi-objective	Real-time captured and display vehicle, human body, non-motor vehicle, license plates image, and faces comparison results (registrant, stranger, channel, similarity)
	Smart Search	Time, Properties, Pictures, License plate
Perimeter Protection	Trigger Events	Buzzer, Alarm push, Alarm prompt, Email, Alarm Out, Compare the result simultaneously, etc.
	Intrusion	Support alarm triggering by specified target types (human and vehicle)
Recoding	Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc
	Recording Mode	Manual, Schedule (Regular, Continuous), Event
	Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	Sync Playback	16/9/4/1
	Search Mode	Time /Date, Alarm, Picture grid, Event
	Backup Mode	USB Device, Network, eSATA
Network	Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
	Remote Users	8 users
	Smart Phone	iPhone, iPad, Android
	Interoperability	ONVIF, SDK, CGI
	Network Interface	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Disk Array	Array Type	RAID 5, RAID 6, RAID 10
	HDD	4 SATA Ports, up to 16TB capacity for each disk
	eSATA	1 eSATA Interface
Interface	Audio In/Out	1/1
	Alarm In/Out	16/4
	USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 3.0
	RS485 Interface	Support
	RS232 Interface	Support
General	Power Supply	AC100 ~ 240V
	Power Consumption	< 15 W (without HDD)
	Operating Conditions	-10°C ~ 60°C, Less than 90% RH non condensing
	Storage Conditions	-10°C ~ 60°C, Less than 90% RH non condensing
	Dimensions	440 × 368.3 × 70 mm (17.32 × 14.5 × 2.76 inch)
	Net Weight	4.65 kg (10.25 lb) without HDD
	Certifications*	CE/FCC

\* The listed certifications are issued for markets in different regions. For the current status of the listed certifications in your region, please contact an authorized Starview representative.

For technical or sales support, please visit:  
**www.starviewint.asia**

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.  
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia