



# SV-V SERIES

STARVIEW FHD VIDEO WALL



## KEY FEATURES

- › FHD Resolution
- › 7 × 24 Operation
- › 25% Haze, 3H
- › 50000H Operation Time
- › 1.7mm/0.88mm Slim Bezel
- › RS232 Control
- › Landscape & Portrait Installation Support
- › VESA Mounting Interface

## DESIGNED TO BE COMPATIBLE WITH CHRISTIE'S IMAGE CONTROL SYSTEM

### Starview FHD Video Wall SV-V Series

Supported control solution	Switchers and AV distribution	<ul style="list-style-type: none"> <li>• Terra Controller</li> <li>• Terra Receiver</li> <li>• Terra Transmitter</li> </ul>
	Video wall processors	<ul style="list-style-type: none"> <li>• Hedra Standard</li> <li>• Hedra Pro-KVM</li> <li>• Hedra Pro-Video</li> </ul>
	Image processors	<ul style="list-style-type: none"> <li>• Spyder-S-Series</li> <li>• Mastering Gateway</li> <li>• Spyder X80</li> </ul>

### Products “FHD Video Wall SV-V Series” manufactured by Starview, are paired with Christie Terra Switchers and AV distribution

Solutions beyond matrix switching for AV-over-IP system architectures

Based on off-the-shelf 10G Ethernet components, the Terra solution allows for the design of simple, flexible and highly-scalable system architectures that deliver great performance and user experience at a drastically lower total cost of ownership.

- **Terra Transmitter** - Supply audiovisual sources and control signals with uncompressed, zero-frame latency, artifact-free content over 10G networks.
- **Terra Receiver** - Deliver audiovisual sources and control from an SDVoE system to displays and other devices. Benefit from full signal management including videowall magnification, KVM switching and extension, aspect ratio management, and Multiviewer for confidence monitoring.
- **Terra Controller** - The Christie Terra Controller gives you complete, secure operational control and management over Terra devices and SDVoE systems.



Christie Terra



Christie Hedra

**Paired with Christie Hedra Video wall processors**

Whether it's mission-critical operations or monitoring sources for energy and utilities, your team needs to securely display, arrange, and operate multiple sources to make quick, informed decisions. And that's where the new Christie® video wall processors come in.

With Christie Hedra™, you get secure, real-time access to your data that you can control from virtually anywhere for seamless collaboration and sharing of critical information so you can make those decisions.

**Paired with Christie Spyder Image processors**

Deliver the highest quality content every time

No matter what your canvas is - a live event, sports venue, control room, or corporate space - Christie® image processors and compositors can deliver the highest quality content with the lowest latency.

Christie Spyder-S Series: A revolution in compositing and processing


The Spyder-S Series redefines everything you know about compositing and processing with a better solution for live events, sports venues, and broadcast. Featuring a modular, scalable technology that lets you scale your system by combining individual nodes for nearly limitless inputs, outputs, and megapixels with ultra-low latency. It's everything you need and nothing you don't.

Christie Spyder X80: Designed for demanding events

An undisputed leader in its class, Spyder X80 is a powerful multi-screen windowing processor that offers performance, control, and flexibility for the most demanding, spectacular experiences imaginable.



Christie Spyder

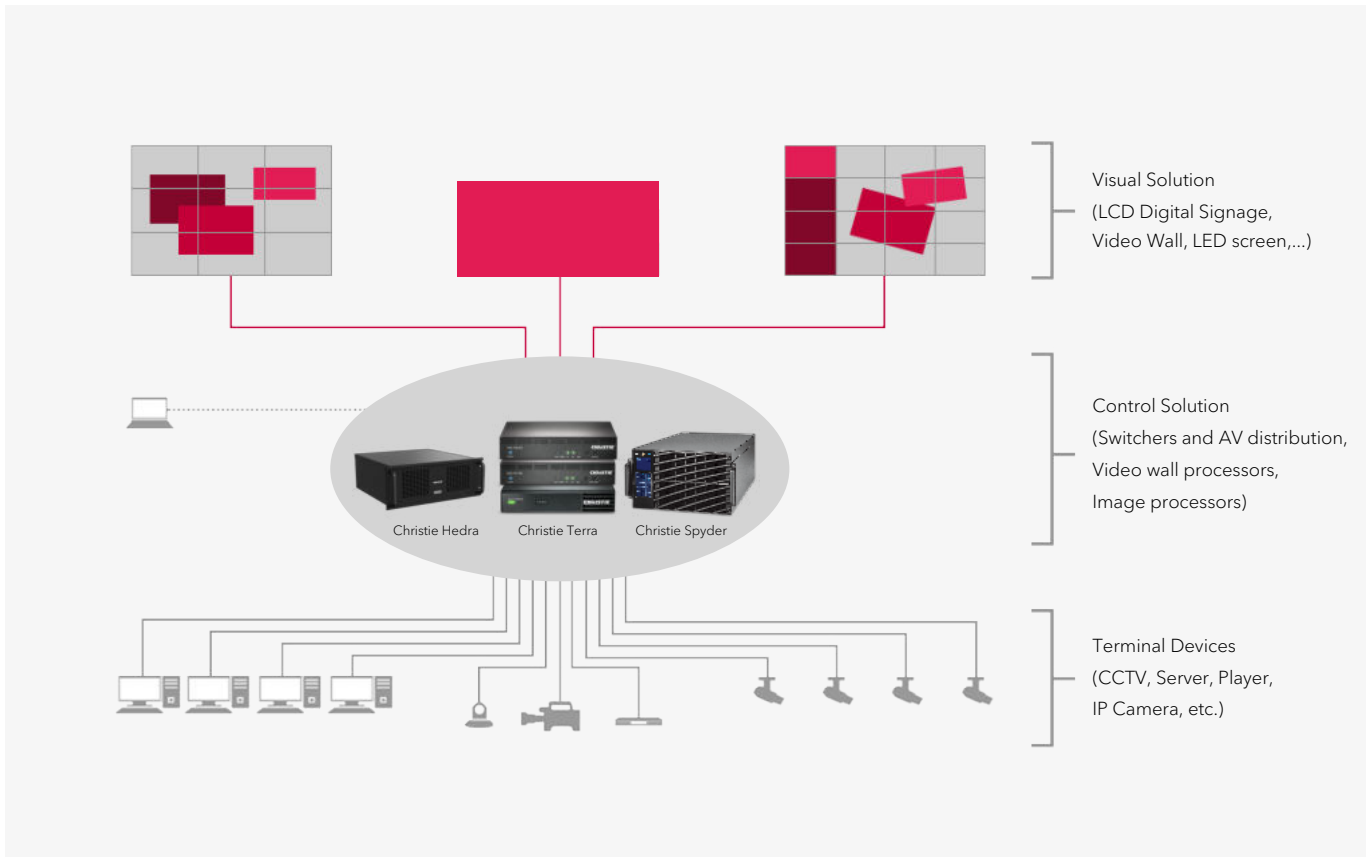


## Technical specifications

## SV-V Series

Model	SV-VP55H	SV-VP55L	SV-VM55L	
Display	Screen Size (Diagonal)	• 55 inch		
	Display Technology	• LCD with LED backlight		
	Native Resolution	• 1920 (H) × 1080 (V)		
	Active Area	• 1209.6(H) × 680.4 (V)		
	Bezel Size	• 0.88mm combined bezel to bezel (0.44mm per side)	• 1.7mm combined bezel to bezel (0.85mm per side)	
	Aspect Ratio	• 16 : 9		
	Brightness	• 700 cd/m <sup>2</sup>	• 500 cd/m <sup>2</sup>	• 500 cd/m <sup>2</sup>
	Haze	• 25%, 3H		
	Contrast	• 1200:1		
	View Angle	• 178°(H) / 178°(V)		
	Display Color	• 16.7M	• 1.07B (8bits+FRC)	
	Response Time	• 8ms		
	Refresh Rate	• 60 Hz		
	Operation Time	• 7 × 24H		
	Life Time	• 50,000 Hrs (Typ.)		
Interface	HDMI In	• × 2 (HDMI 2.0)		
	DP In	• × 2 (DP 1.2)		
	DP Out	• × 1 (Daisy Chain, up to 4K input)		
	Audio Out	• × 1 (3.5mm stereo jack)		
	RS232 In	• × 1 (RJ45, Common used for IR in)		
	RS232 Out	• × 1 (RJ45, Support IR Out)		
	USB	• × 1 (2.0, Firmware update only)		
Power	Power Supply	• AC 100~240V 50/60Hz		
	Power Consumption	• 240W (Typ)		
	Power Consumption (Stand by)	• ≤0.5W		
Environment	Operation Temperature	• 0°C ~ 50°C		
	Operation Humidity	• 10% ~ 80% RH (non condensing)		
	Storage Temperature	• -20°C ~ 60°C		
	Storage Humidity	• 5% ~ 90% RH (non condensing)		
Physical	Color	• Black		
	Body Size (mm)	• 1210.8 (W) × 681.5 (H) × 96 (D) mm	• 1212.7 (W) × 683.5 (H) × 94.7 (D) mm	
	Package Size (mm) (2 sets inside)	• 1310 (W) × 800 (H) × 330 (D) mm		
	Set Weight	• 27.9kg		
	Package Weight (2 sets inside)	• 65kg	• 69kg	
	VESA Mounting (mm)	• 400 × 400mm		

## DIMENSION DRAWING

### SV-VP55H/SV-VP55L

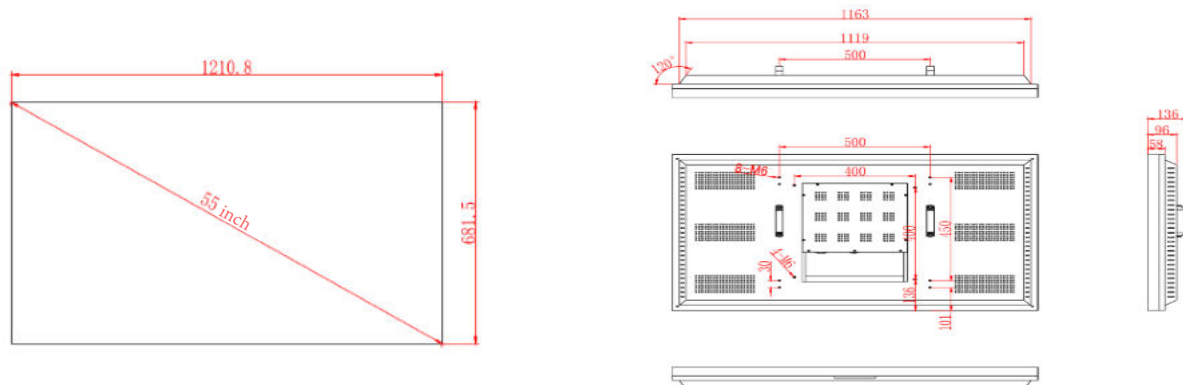



For technical or sales support, please visit:  
[www.starviewint.asia](http://www.starviewint.asia)

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact  
[info@starviewint.asia](mailto:info@starviewint.asia)

Copyright © 2025 STARVIEW ASIA. All rights reserved.  
 Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

DIMENSION DRAWING (CONT.)

SV-VM55L

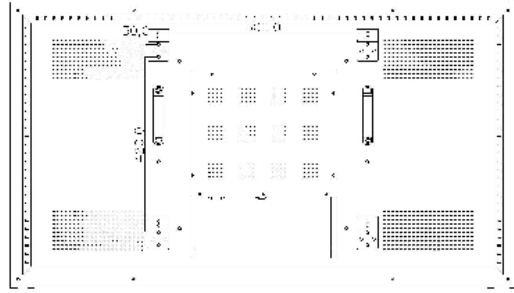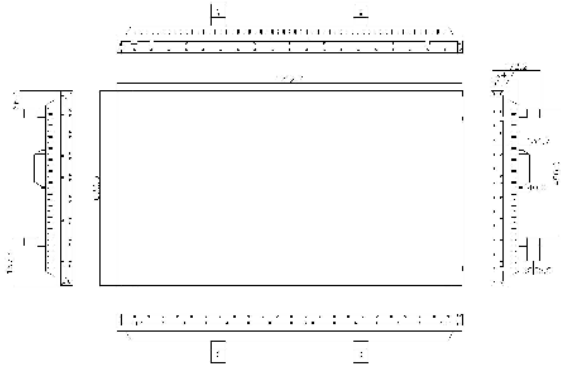

For technical or sales support, please visit:

[www.starviewint.asia](http://www.starviewint.asia)

*Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.*

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact [info@starviewint.asia](mailto:info@starviewint.asia)

Copyright © 2025 STARVIEW ASIA. All rights reserved.  
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia