



SA-LFH SERIES

INDOOR LED VIDEO WALL



FEATURES

- Perfect to split joint without gap, it can be jointed as various of sizes or shapes.
- 160° Ultra-Wide Visual Angle, to view without blind angle and color cast, to enjoy a visual feast.
- Anti-Blue Light, Anti-Visual Fatigue
- High grayscale and refreshing, the picture is stable by dynamic display, no corrugated
- Front maintenance and installation, no need maintenance space, convenient and fast, reinforcing cover, to make it be flat.



- It can realize splicing of various sizes such as 640x480mm, 640x640mm, 960x480mm, 320x640mm.



DESIGNED TO BE COMPATIBLE WITH CHRISTIE'S IMAGE CONTROL SYSTEM

Starview SA-LFH Series

Supported control solution	Switchers and AV distribution	<ul style="list-style-type: none"> • Terra Controller • Terra Receiver • Terra Transmitter
	Video wall processors	<ul style="list-style-type: none"> • Hedra Standard • Hedra Pro-KVM • Hedra Pro-Video
	Image processors	<ul style="list-style-type: none"> • Spyder-S-Series • Mastering Gateway • Spyder X80

Products "SA-LFH Series" manufactured by Starview, are paired with Christie Terra Switchers and AV distribution

Solutions beyond matrix switching for AV-over-IP system architectures

Based on off-the-shelf 10G Ethernet components, the Terra solution allows for the design of simple, flexible and highly-scalable system architectures that deliver great performance and user experience at a drastically lower total cost of ownership.

- **Terra Transmitter** - Supply audiovisual sources and control signals with uncompressed, zero-frame latency, artifact-free content over 10G networks.
- **Terra Receiver** - Deliver audiovisual sources and control from an SDVoE system to displays and other devices. Benefit from full signal management including videowall magnification, KVM switching and extension, aspect ratio management, and Multiviewer for confidence monitoring.
- **Terra Controller** - The Christie Terra Controller gives you complete, secure operational control and management over Terra devices and SDVoE systems.



Christie Hedra

Paired with Christie Hedra Video wall processors

Whether it's mission-critical operations or monitoring sources for energy and utilities, your team needs to securely display, arrange, and operate multiple sources to make quick, informed decisions. And that's where the new Christie® video wall processors come in.

With Christie Hedra™, you get secure, real-time access to your data that you can control from virtually anywhere for seamless collaboration and sharing of critical information so you can make those decisions.

Paired with Christie Spyder Image processors

Deliver the highest quality content every time

No matter what your canvas is - a live event, sports venue, control room, or corporate space - Christie® image processors and compositors can deliver the highest quality content with the lowest latency.

Christie Spyder-S Series: A revolution in compositing and processing

The Spyder-S Series redefines everything you know about compositing and processing with a better solution for live events, sports venues, and broadcast. Featuring a modular, scalable technology that lets you scale your system by combining individual nodes for nearly limitless inputs, outputs, and megapixels with ultra-low latency. It's everything you need and nothing you don't.

Christie Spyder X80: Designed for demanding events

An undisputed leader in its class, Spyder X80 is a powerful multi-screen windowing processor that offers performance, control, and flexibility for the most demanding, spectacular experiences imaginable.




Christie Spyder

For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

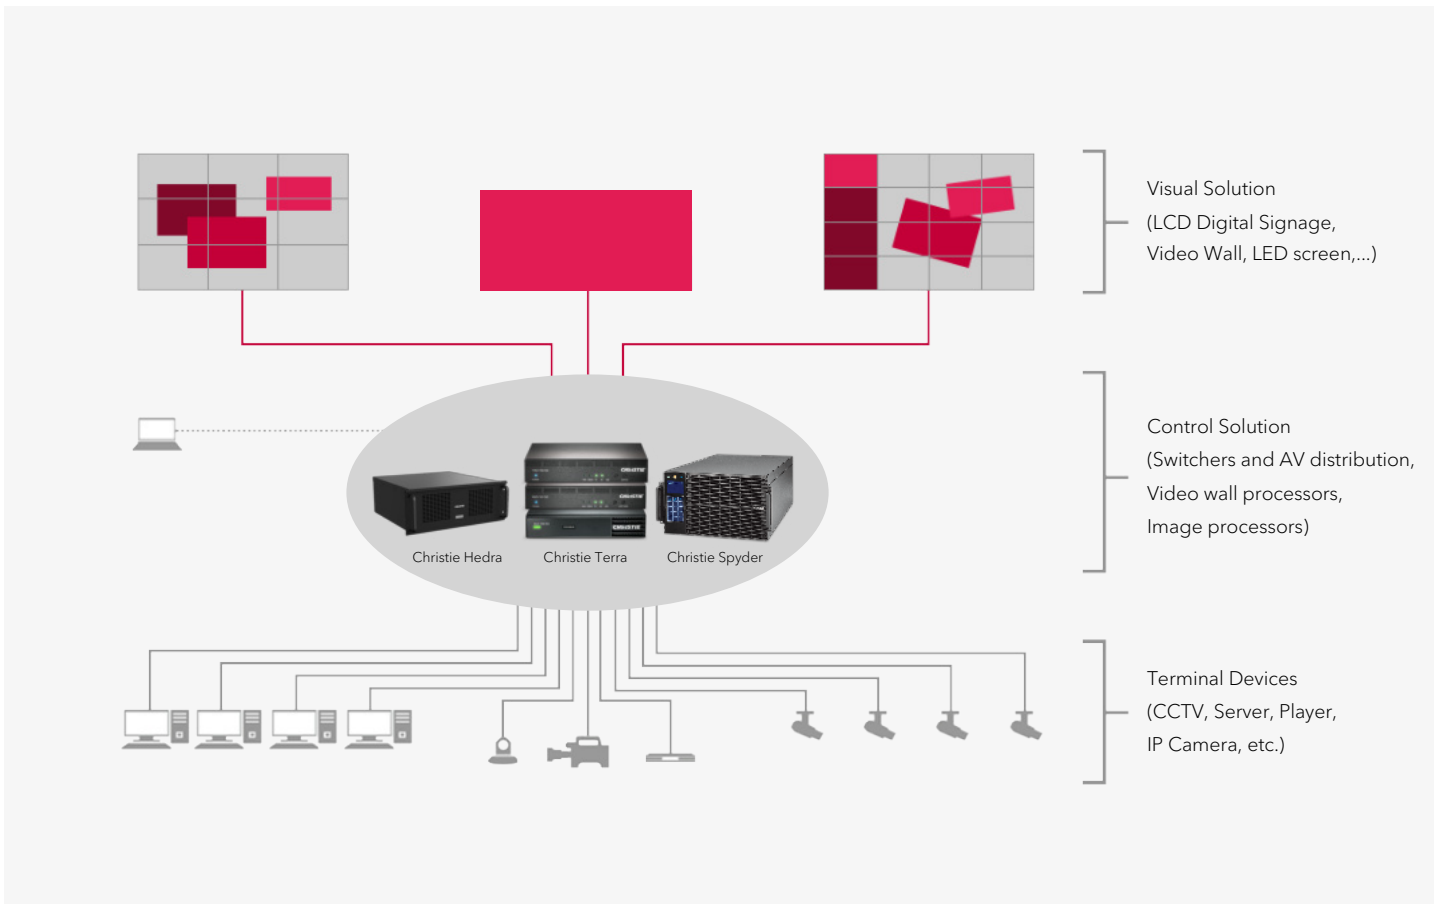

For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
 Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

Technical specifications

SA-LFH SERIES

Model	SA-LFH-P1.2	SA-LFH-P1.5	SA-LFH-P1.6	SA-LFH-P1.8	SA-LFH-P2	SA-LFH-P2.5
Pixel Pitch (mm)	1.25	1.538	1.667	1.86	2	2.5
Pixel Configuration	SMD1010, RGB 3-in-1	SMD1212, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD2020, RGB 3-in-1
Pixel Density (pixel/m ²)	640,000	422,500	358,801	288,369	250,000	160,000
Module Size (W x H) (Customize)	320 x 160 mm					
Module Resolution (W x H)	256 x 128	208 x 104	191 x 95	172 x 86	160 x 80	128 x 64
Cabinet Size (W x H) (Customize)	640x480mm/640x640mm/960x480mm					
Cabinet Weight	5.5kg (640x480mm)					
White Balance Brightness	800 - 1200 nits					
Brightness Level	Auto/Manual: 256 Levels					
Brightness Control	>1200 nits					
Color Temperature (Adjustable)	3,200 - 9,000°K					
Contrast Ratio	5,000:1					
Driver IC	ICN1065L					
Installation and Service Access	Front Access, module removal. All internal electronics accessible					
Cabinet Material	Die-casting Aluminium					
Salt tolerance (optional)	NEMA 4X					
Communication	LAN: 120 m (no repeating); Optical Fiber Transmission: 500m - 10km					
System Platform	Compatible with Starview CMS DSS-SW platform					
Receiving card	MRV208					
Viewing Angle (H/V)	160° /160°					
The Optimal Visual Distance	1m	1.5m	1.6m	1.86m	2m	2.5m
Grayscale	It is available within 65,536 grade					
Installation Options	Standard Flat Wall U/L shape Ceiling					
Install Orientation	Landscape					
Display Color	14 Bit					
Frame Rate	50/60 Hz					
Refresh Rate	3,840 Hz					
Runtime	24/7					
Lifetime	100,000 hours					
Heat Output Per Sqm	614 BTU/hr typical, 1911 BTU/hr maximum					
Max Power Consumption	470W/m ²					
Average Power Consumption	180W/m ²					
Protection Grade	IP20					
Power Supply	100-240 VAC @50/60Hz (Use power adapter: Meanwell UHP-200A-5)					
Working Temperature/Humidity (°C/RH)	-10~50°C/10%~95% (non-condensing)					
Storage Temperature/Humidity (°C/RH)	-20~60°C/10%~95% (non-condensing)					
Certification* (Optional)	CCC/ CE/ RoHS/ FCC/ EMC/ Safety 60950-1/ EN 13501-1					

*The listed certifications are issued for markets in different regions. For the current status of the listed certifications in your region, please contact an authorized Starview representative.

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia