




SA-XFH SERIES


INDOOR LED VIDEO WALL

FEATURE


- Ultra high definition: Cabinets seamless splicing to make 2K, 4K, 8 and 16K ultra high definition LED screen
- Light weight: Designed to be lightweight for easier handling and transport.
- Flexible assembly: Offers flexible assembly options to fit different setups and requirements.
- Right angle splicing: Supports right-angle splicing for precise corner connections.
- Front maintenance: Includes pre-maintenance support to make servicing easier and more efficient.
- Quick installation: Enables quick installation to reduce setup time.

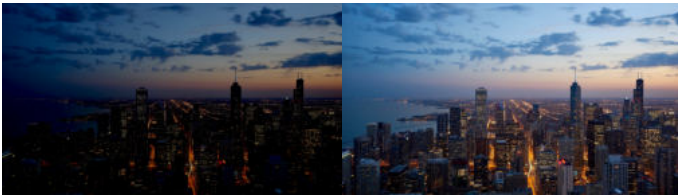

High brightness, high grayscale, high refresh rate, no scanning line for taking photos

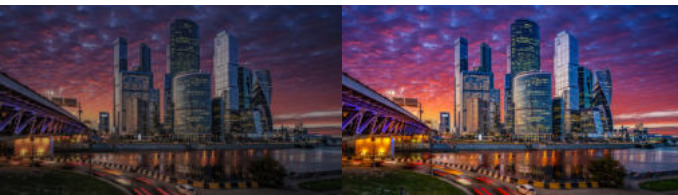

Professional color management techniques, rich color layers and more natural color transitions

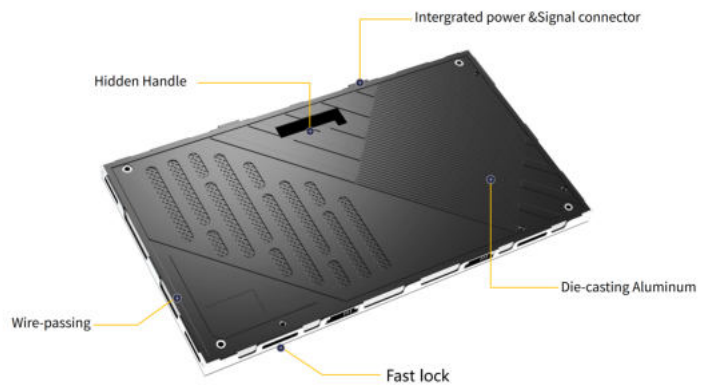

DESIGNED TO BE COMPATIBLE WITH CHRISTIE'S IMAGE CONTROL SYSTEM

Starview SA-XFH-Series

Supported control solution	Switchers and AV distribution	<ul style="list-style-type: none"> • Terra Controller • Terra Receiver • Terra Transmitter
	Video wall processors	<ul style="list-style-type: none"> • Hedra Standard • Hedra Pro-KVM • Hedra Pro-Video
	Image processors	<ul style="list-style-type: none"> • Spyder-S-Series • Mastering Gateway • Spyder X80

Products "SA-XFH Series" manufactured by Starview, are paired with Christie Terra Switchers and AV distribution

Solutions beyond matrix switching for AV-over-IP system architectures

Based on off-the-shelf 10G Ethernet components, the Terra solution allows for the design of simple, flexible and highly-scalable system architectures that deliver great performance and user experience at a drastically lower total cost of ownership.

- **Terra Transmitter** - Supply audiovisual sources and control signals with uncompressed, zero-frame latency, artifact-free content over 10G networks.
- **Terra Receiver** - Deliver audiovisual sources and control from an SDVoE system to displays and other devices. Benefit from full signal management including videowall magnification, KVM switching and extension, aspect ratio management, and Multiviewer for confidence monitoring.
- **Terra Controller** - The Christie Terra Controller gives you complete, secure operational control and management over Terra devices and SDVoE systems.



Christie Hedra

Paired with Christie Hedra Video wall processors

Whether it's mission-critical operations or monitoring sources for energy and utilities, your team needs to securely display, arrange, and operate multiple sources to make quick, informed decisions. And that's where the new Christie® video wall processors come in.

With Christie Hedra™, you get secure, real-time access to your data that you can control from virtually anywhere for seamless collaboration and sharing of critical information so you can make those decisions.

Paired with Christie Spyder Image processors

Deliver the highest quality content every time

No matter what your canvas is - a live event, sports venue, control room, or corporate space - Christie® image processors and compositors can deliver the highest quality content with the lowest latency.

Christie Spyder-S Series: A revolution in compositing and processing


The Spyder-S Series redefines everything you know about compositing and processing with a better solution for live events, sports venues, and broadcast. Featuring a modular, scalable technology that lets you scale your system by combining individual nodes for nearly limitless inputs, outputs, and megapixels with ultra-low latency. It's everything you need and nothing you don't.

Christie Spyder X80: Designed for demanding events


An undisputed leader in its class, Spyder X80 is a powerful multi-screen windowing processor that offers performance, control, and flexibility for the most demanding, spectacular experiences imaginable.



Christie Spyder

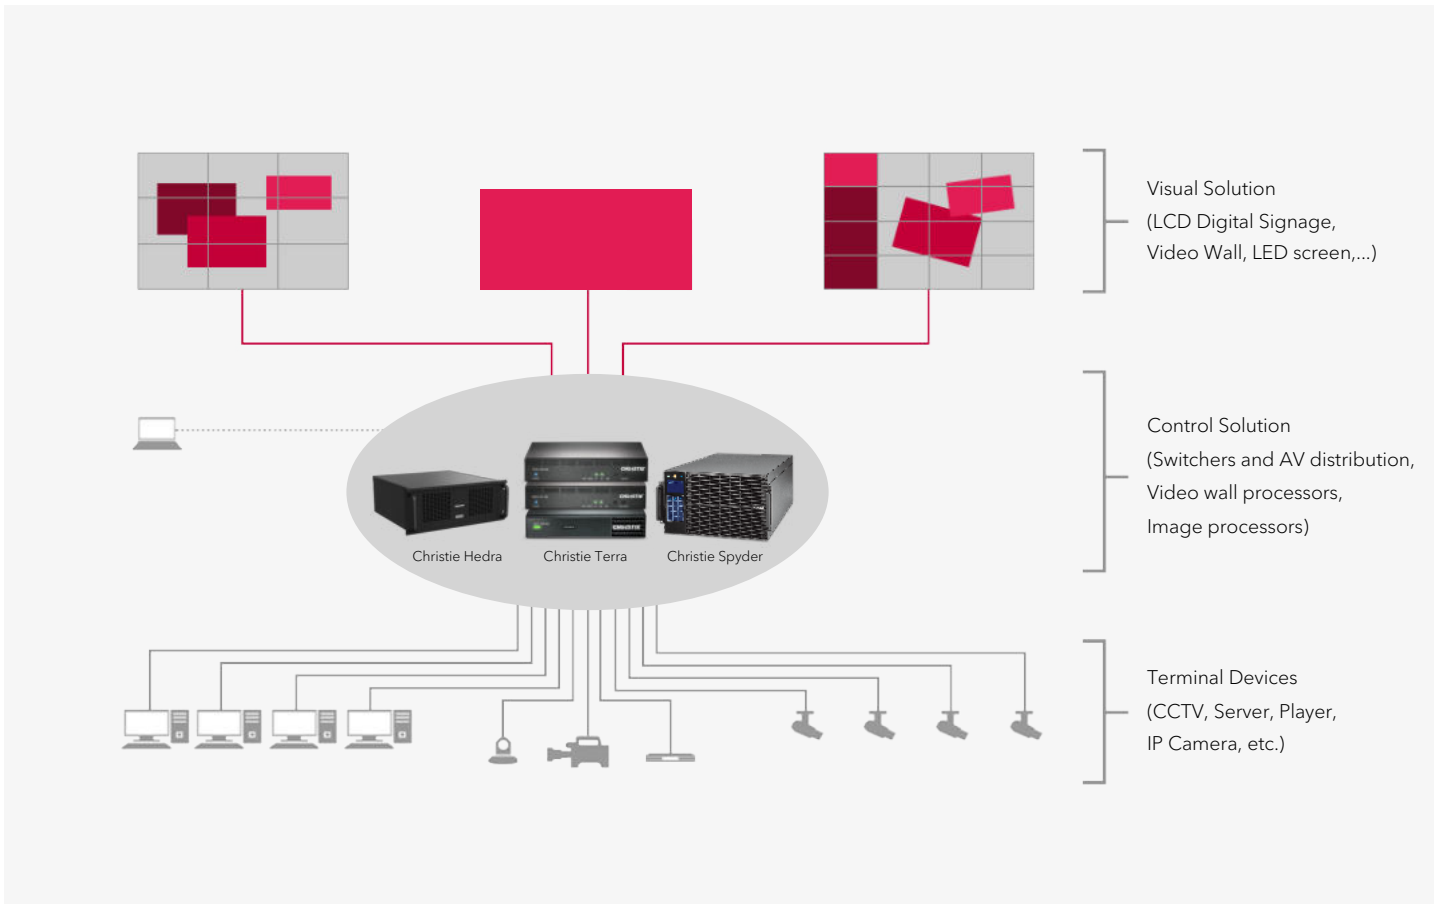

DIMENSION

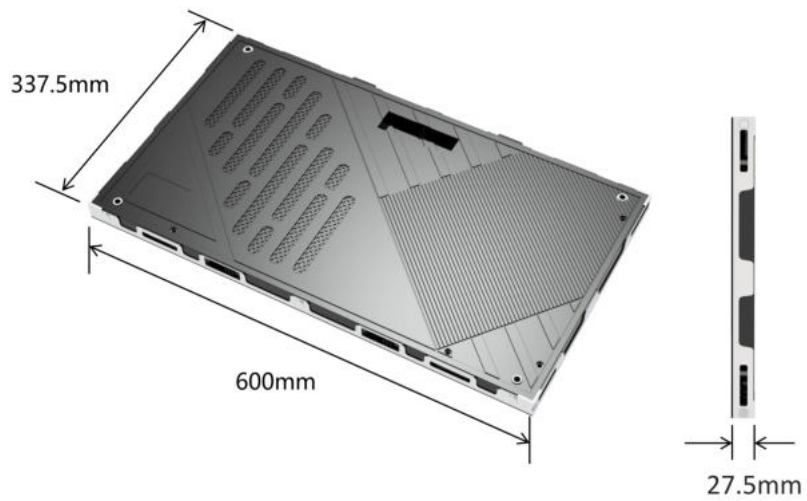


For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
 Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

PRODUCT ADVANTAGES

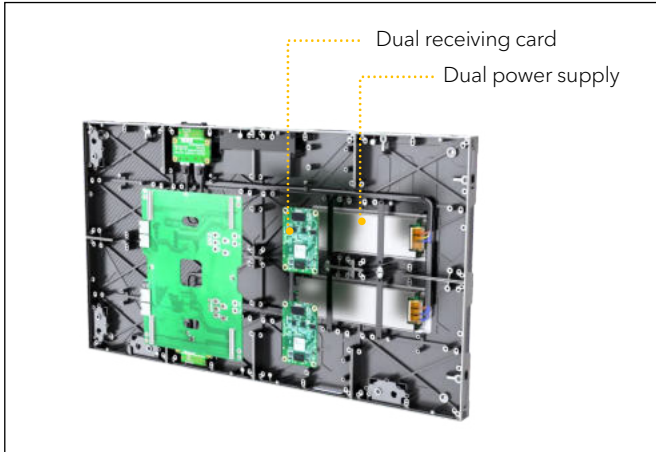

Dual card dual electric (Optional)

Configurable dual backup version to ensure uninterrupted power supply. Signal not lost, more stable and reliable.



Seamless Splicing

Die-casting Aluminum Cabinet structure with CNC highprecision processing (Flatness of Cabinet $\leq 0.1\text{mm}$)
Screwless design for faster and more secure installation
Super silent fanless design



Creative splicing

Supports shapes such as right angles and arcs to meet various creative splicing needs.



Installation method

Support multiple installation methods such as lifting, wall mounted installation, and embedded installation, suitable for more scenarios.

Technical specifications

SA-XFH SERIES

Model	SA-XFH-P1.2	SA-XFH-P1.5	SA-XFH-P1.8	SA-XFH-P2.5
Pixel Pitch (mm)	1.25	1.56	1.87	2.5
LED Type	SMD1010, RGB 3-in-1	SMD1212, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD1515, RGB 3-in-1
Physical Density (pixel/m ²)	640,000	409,600	284,444	160,000
Module Resolution (W x H) (pixel)	240x135	192x108	160x90	60x135
Module Size (W x H) (mm)	300x168.75	300x168.75	300x168.75	150x337.5
Cabinet Resolution (W x H) (pixel)	480x270	384x216	320x180	240x135
Cabinet Size (W x H x D) (mm)	600x337.5x27.5 (Customize)			
Module Quantity (W x H)	2x2	2x2	2x2	4x1
Cabinet Weight (kg)	4.5			
Cabinet Material	Die-casting Aluminium			
Brightness Calibration	Have			
Brightness of White Balance (nits)	800-1200			
Brightness Control	>1200 nits			
Brighness Level	Auto/Manual: 256 Levels			
Support HDR, HLG	Yes			
Color Temperature (°K)	3,200 - 9,000 Adjustable			
Viewing Angle (V/H)	160°/160°			
Brightness Uniformity	≥99.8%			
Contrast Ratio	10,000 : 1			
Driver IC	ICN1065L			
Frame Rate (Hz)	50/60			
Refresh Rate (Hz)	3,840			
Lifetime (hours)	100,000			
Runtime	24/7			
Installation and Service Access	Front Access, module removal. All internal electronics accessible			
Installation Options	Standard Flat Wall U/L shape Ceiling			
Install Orientation	Landscape/ Portrait			
Communication	LAN: 120m (no repeating); Optical Fiber Transmission: 500m - 10km			
System Platform	Compatible with Starview CMS DSS-SW platform			
Receiving Card	MRV532			
Drive Mode	1/45 scan	1/48 scan	1/45 scan	1/30 scan
Display Color	14 bit			
Heat Output Per Sqm	338 BTU/hr typical, 1050 BTU/hr maximum			
Power Supply	100-240 VAC @50/60Hz (Use power adapter: Meanwell UHP-200A-5)			
Max. Power Consumption (W/m ²)	350			
Avg. Power Consumption (W/m ²)	100			
Protection	IP31			
Salt Tolerance (optional)	NEMA 4X			
Working Temperature/Humidity (°C/RH)	-20~60°C/10%~85% (non-condensing)			
Storage Temperature/Humidity (°C/RH)	-20~60°C/10%~85% (non-condensing)			
Certification* (Optional)	CCC/ CE/ RoHS/ FCC/ EMC/ Safety 60950-1/ EN 13501-1			

*The listed certifications are issued for markets in different regions. For the current status of the listed certifications in your region, please contact an authorized Starview representative.

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia