


SA-C SERIES

INDOOR LED VIDEO WALL

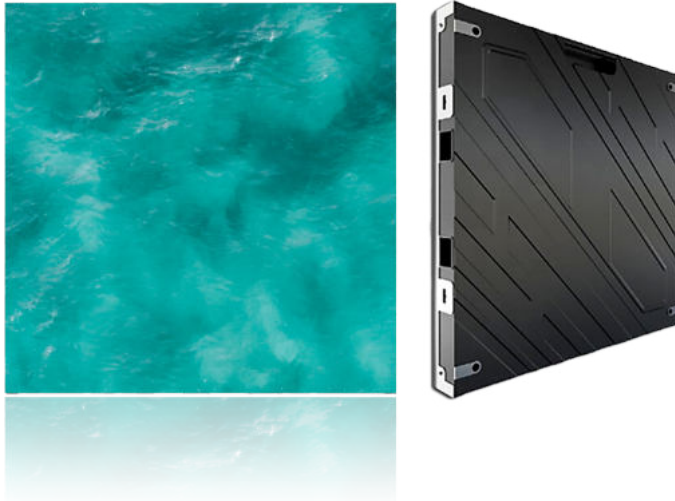

DESCRIPTION

The Starview SA-C Series panels feature a lightweight die-cast aluminum frame and high brightness LEDs, delivering great visual performance in any light condition. The Starview SA-C Series is light weight and easy to handle enabling it to be an attractive solution for hanging video walls or traditional video walls favoring a compact fine pitch solution. Add aesthetic value to indoor environments with LED visual solutions and make your mark. The SA-C Series is manufactured using the highest quality LED components, offering stunning brightness, contrast and color reproduction.

FEATURE

- Available in P1.2, P1.5, P1.8, P2.5, P3.0 pixel pitches
- Chip of LED uses XGT SMD LED 3-in-1 with high-performance
- Compatible for hanging or free-standing
- Installation environment: Indoor
- Front & Rear Maintenance Access
- High-definition, bright and seamless visuals with wide viewing angles
- IP20 protection

INDOOR LED DISPLAY TECHNOLOGY

Starview brings LED video to the next level with its standard package LED display solution. Designed for premier applications that require the highest image quality at the closest viewing distances, this product takes advantage of 3-in-1 SMD (surface-mount device) LED technology to produce exceptional brightness, unsurpassed viewing angles and incredible picture detail. Starview can provide flexible solutions to fit customers' unique display needs, right down to the LED.

EFFICIENT DESIGN

High efficiency design allows the product to overcome harsh interior lighting conditions without pushing electrical components beyond their capabilities. This saves energy, increases reliability and extends lifetime.



PRODUCT ADVANTAGES



Minimal Power Consumption

Power consumption has been a major concern for many LED applications, especially those requiring 24/7 operation. Starview LED displays are designed with optimized power supplies to limit power consumption to a minimum. This not only helps you save money but also confirms Starview's long-term commitment to environmental protection and core focus on green energy-efficient solutions.



Ease Of Services

Starview strives to provide each customer with the best service possible in any application. This starts with designing displays with ease of service in mind. With front and rear access, our High Resolution Indoor Video Displays provide dynamic video quality with worry-free installation and service.



Uniform Colors and Brightness all the time

Starview LED technology guarantees uniform colors and brightness across the display. With this advanced technology, you can mix different batches of tiles and expect the best picture with accuracy and consistency over the lifetime of the display.




High Definition Displays

The Starview SA-C Series offers the finest pixel pitch LED display solutions, suitable for the most demanding applications where a fine pixel pitch is a need in a fixed installation environment such as conference room, control room, studio, lobby, airports, shops, etc.

For technical or sales support, please visit:
www.starviewint.asia

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia

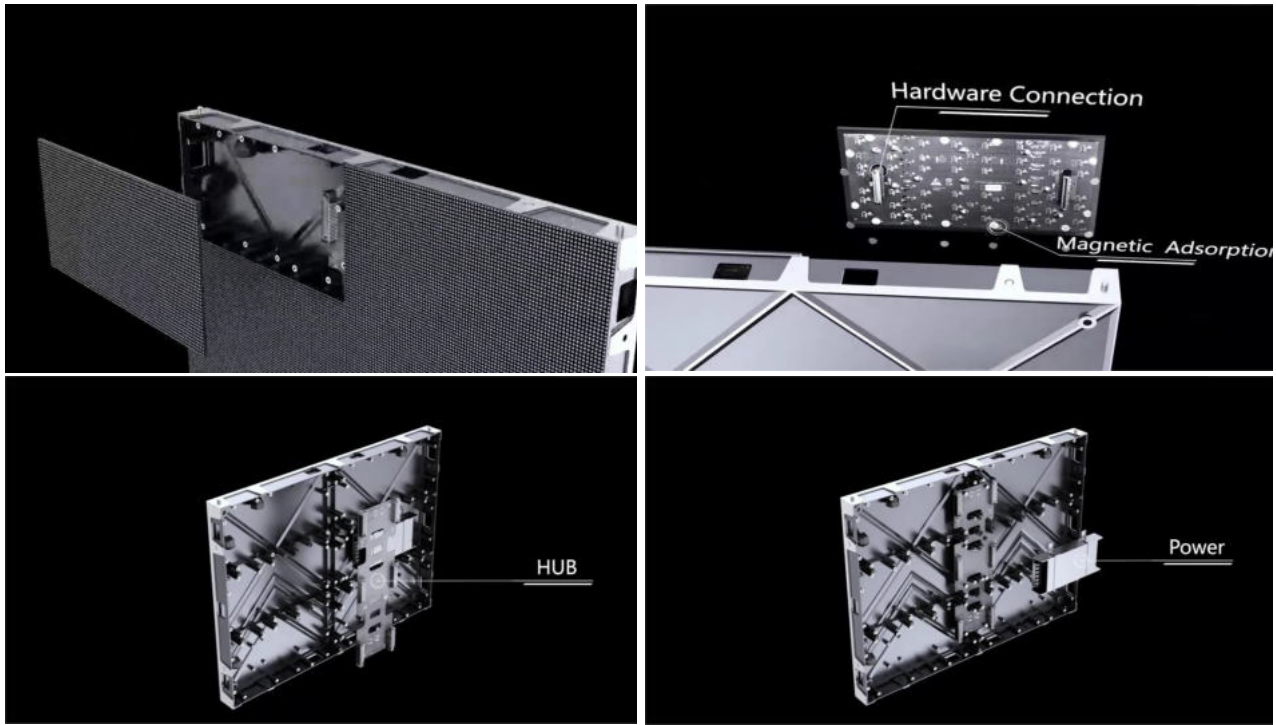

Technical specifications

SA-C SERIES

Model	SA-C1.2	SA-C1.5	SA-C1.8	SA-C2.5	SA-C3.0
Pixel Pitch	1.25 mm	1.53 mm	1.875 mm	2.5 mm	3.0 mm
Pixel Configuration	SMD1010, RGB 3-in-1	SMD1212, RGB 3-in-1	SMD1515, RGB 3-in-1	SMD2121, RGB 3-in-1	SMD2121, RGB 3-in-1
Pixel Density	640,000 pixels/m ²	422,500 pixels/m ²	284,444 pixels/m ²	160,000 pixels/m ²	105,625 pixels/m ²
Module Resolution (W x H)	256 x 128 pixels	208 x 104 pixels	172 x 86 pixels	128 x 64 pixels	104 x 52 pixels
Module Size (W x H)	320 x 160 mm	320 x 160 mm	320 x 160 mm	320 x 160 mm	320 x 160 mm
Cabinet Resolution (W x H)	512 x 384 pixels	416 x 312 pixels	344 x 258 pixels	256 x 192 pixels	208 x 156 pixels
Cabinet Size (W x H) (Customize)	640 x 480 mm				
Modules/Cabinet (W x H)	2 x 3				
Cabinet Weight	7 kg				
Cabinet Design	Aluminum				
Maximum Power	750 W/m ²	650 W/m ²	600 W/m ²	600 W/m ²	600 W/m ²
Average Power	150 - 250 W/m ²	150 - 250 W/m ²	150 - 250 W/m ²	150 - 250 W/m ²	150 - 250 W/m ²
Brightness	800 cd/m ²				
Color Temperature (Adjustable)	1000 - 18,500K (Optional)				
Viewing Angle (H/V)	160° / 160°				
Display Colors	14 bit (4,398 billion)				
Contrast Ratio	5000 : 1				
Frame Rate	50/60 Hz				
Driver IC	2163 IC	2163 IC	2163 IC	2037 IC	2037 IC
Refresh Rate (Adjustable)	1920 Hz	3840 Hz	3840 Hz	1920 Hz	1920 Hz
Scan Mode	1/64	1/52	1/43	1/32	1/26
Gray Scale	65,536 Shades Per Color				
Service Access	Front or Rear				
LED Lifetime	> 100,000 hours				
Line Voltage	100-240 VAC @50/60Hz				
Heat Output Per Sqm	600 BTU/hr typical, 1,800 BTU/hr maximum				
Working Temperature	-20° ~ 60°C				
Working Humidity	10% ~ 85%RH				
Storage Temperature	-20° ~ 60°C				
Storage Humidity	10% ~ 85%RH				
Best View Distancing	≥1.25m	≥1.53m	≥1.86m	≥2.5m	≥3.0 6m
IP Rating	IP40				
Certificate*	CCC/ CE/ RoHS/ FCC				

*The listed certifications are issued for markets in different regions. For the current status of the listed certifications in your region, please contact an authorized Starview representative.

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia