

SA-CS SERIES


LCD Display



KEY FEATURES

- › UHD Resolution
- › Super Slim Even Bezel
- › Aluminum Frame Light Weight Design
- › 700nits High Brightness
- › 50,000 Hrs 7×24 Operation
- › Android 13
- › Multiple Control: CMS/RS232/TCP-IP
- › Landscape & Portrait Installation support
- › VESA Mounting Interface

DIMENSION DRAWING

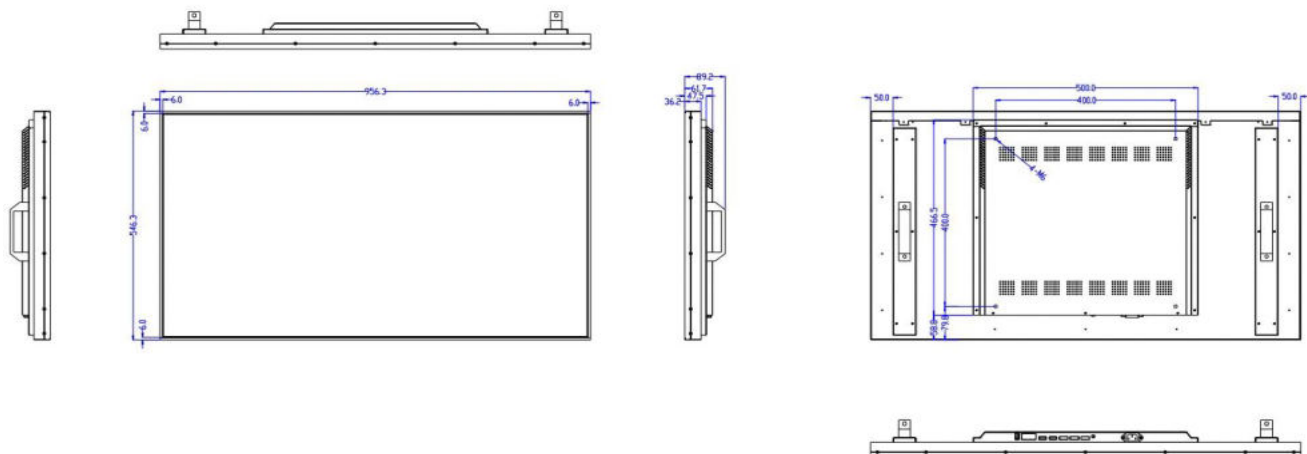

Technical specifications

SA-CS SERIES

Model		SA-CS43H	SA-CS55H	SA-CS65H	SA-CS75H	SA-CS86H	SA-CS98H
Display	Screen Size (Diagonal)	• 43 inch	• 55 inch	• 65 inch	• 75 inch	• 86 inch	• 98 inch
	Native Resolution	• 3840 (H) × 2160 (V)					
	Aspect Ratio	• 16 : 9					
	Brightness	• 700nits					
	Contrast	• ≥ 1200:1					
	View Angle	• 178°(H) / 178°(V)					
	Display Color	• 16.7M					
	NTSC	• >72%					
	Operation Time	• 7 × 24h					
	Surface	• 25% Haze, 3H					
	Life Time (Light Source)	• 50,000 Hrs (Typ.)					
	MTBF	• 50,000hrs for 7×24 commercial use					
	Pixel Defect	• Class A (max 2 bright / 5 dark dots)					
	Uniformity DeltaE	• Delta Y≥70% (9 points), Color uniformity DeltaE ≤ 3					
	Color Calibration	• Color temp 9300K					
	Burn-in Protection	• Pixel shift, screensaver					
Interface	HDMI in (2.0)	• × 3 (HDMI1 ARC / HDMI 2/HDMI 3)					
	USB	• USB 3.0×1, USB 2.0 (OTG)×1					
	Audio out	• 3.5mm Earphone × 1 , SPDIF× 1					
	RS232 (In/out)	• RJ45 × 2					
	LAN Port	• RJ45 × 1					
Configuration	Solution	• T982					
	CPU	• A55x4, up to 1.9GHz					
	GPU	• Multi-Core Mali-G52					
	RAM/ROM	• 4/32G					
	OS	• Android 13					
	LAN	• 10/100M					
	WIFI	• 802.11b/g/n(2.4G+5G) Removable					
	Bluetooth	• BT5.0					
Power	Built-In Speaker	• 10W× 2					
	Power supply	• AC100-240V, 50/60Hz					
	Power consumption	• 120W	• 165W	• 180W	• 210W	• 290W	• 380W
Environment	Stand by	• 0.5W	• 0.5W	• 0.6W	• 0.6W	• 0.6W	• 0.6W
	Operation Temperature	• 0°C ~ 50°C					
	Operation Humidity	• 10% ~ 85% RH					
	Storage Temperature	• -20°C ~ 60°C					
	Storage Humidity	• 5% ~ 95% RH					
Physical	Color/Material	• Black/Aluminum					
	Bezel Width (L/R/T/B)	• 6mm	• 6mm	• 6mm	• 7.9mm	• 7.9mm	• 7.9mm
	Set Outline Dimension (W×H×D)	• 956.3×546.3 ×62.2mm	• 1088.2×619.2 ×62.2mm	• 1224.7×698.1 ×62.4mm	• 1444.6×821.2 ×62.4mm	• 1665.8×946.6 ×61.9mm	• 1917.1×1088.1 ×62.1mm
	Package Dimension (W×H×D) Gravity carton	• 1115×195 ×715mm	• 1260×195 ×802mm	• 1380×195 ×870mm	• 1605×195 ×985mm	• 1815×195 ×1105mm	• 2060×210× 1235mm
	Set Weight	• 10Kg	• 13Kg	• 16Kg	• 24Kg	• 33Kg	• 45Kg
	Packed Weight-Gravity carton	• 13.5Kg	• 18Kg	• 23Kg	• 32Kg	• 46Kg	• 68Kg
	VESA Mounting	• 400×300	• 400×400	• 400×400	• 400×400	• 400×400	• 600×400
	VESA Hole Size	• 6mm					

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia