



SA-LC-P1.2

SOFT LED MODULE DESIGN

LED solution

Starview SA-LC-P1.2 adaptive LED tile allows for more creativity than ever before. Its radical lightweight design eliminates any traditional display screen component: no shader, no perforations, nothing to interfere with the viewing experience. Its light weight and ability to curve, bend, fold and attach to virtually any surface makes it perfect for those installations that call for a non-traditional LED solution.

FEATURES


1. Good flexibility, can be curved freely
2. Make a customized personalized design
3. Adapt to more complex environments and better visual angles
4. Use the Chip LED with two options like SMD Kinglight or Nationstar
5. Soft frame is insulation, big magnetic force, good flatness
6. Allow creating Module video wall up to 360 curves





MAGNETIC

The slim and lightweight magnetic module can fit any design and adhere to any custom frame. It requires very little space for wiring and mounting.

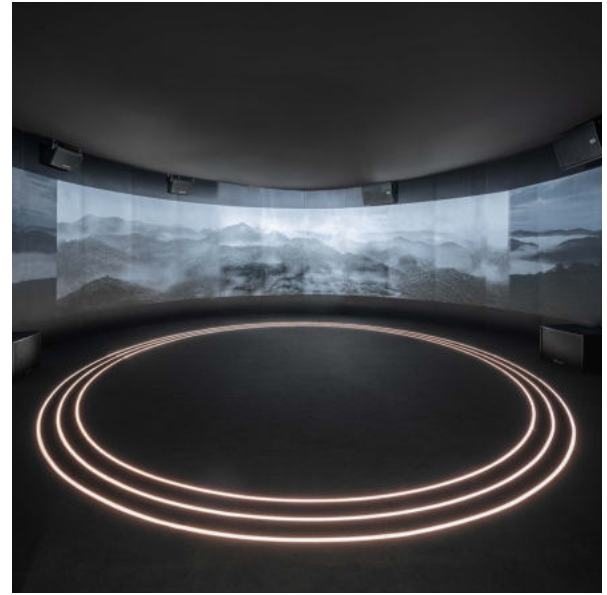

CUSTOM FRAMES

SA-LC-P1.2 specific framing structure is designed and manufactured to accomplish your unique design and deployment.



GOOD FLEXIBILITY

Module with small-unit and flexible design, makes possibility of more complicated shapes for the video show.



LARGE VIEW ANGLE

Make every viewing angle ideal, ensuring color and image size are always standard and vivid.

Technical specifications

Model	SA-LC-P1.2
Pixel Pitch	1.25 mm
Pixel Density (pixels/m ²)	640,000
Pixel Configuration	SMD1010
Module Resolution (W x H)	256x128 pixels
Single Module Size (W x H)	320x160x7.5mm
Single Cabinet Size (W x H)	Customized
Cabinet Material	Slim Curvable Steel Cabinet
Best View Distancing	1.25 - 200m
Vertical Viewing Angle	160° (Standard LEDs Viewing Angle)
Horizontal Viewing Angle	160° (Standard LEDs Viewing Angle)
Brightness	600 nits
Brightness Adjustable	Manual: 256 levels; Auto: 8 levels
Contrast Ratio	5000 : 1
Refresh Rate	3840Hz (Adjustable)
Display Colors	14 bit
Color Temperature	3000 ~ 12000°K (Adjustable)
Scanning mode	1/64
LED Lifetime	> 100,000hrs Typ
Protection	IP33
Operating Temperature	-30° to 60°C
Operating Humidity	10% ~ 95% (RH)
MTBF	> 100,000hrs
Control Distance	120m (CAT6); Optical fiber: 500m - 10km
Line Voltage	AC110 ~ 240V @ 50/60Hz
Power Consumption	Max: 500 W/m ² ; Average: 180 W/m ²

For technical or sales support, please visit:

www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2025 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 Williams Street, Melbourne VIC 3000, Australia