STARVIEW ASIA
TECH FOR A BETTER WORLD

SA-H3SIP SERIES

VIDEO CONFERENCE



DESCRIPTIONS

Video conferencing technology is an online solution that allows users in different locations to hold face-to-face meetings without needing to move to a common location. This technology is particularly convenient for business users in different cities or countries as it saves time, costs, and the hassles associated with business travel.

The Starview Video Conference SA-H3SIP Series is a complete solution for organizations looking to easily convert any room into a video collaboration center. This high-performance video system provides everything you need to start collaborating and can be customized to meet the needs of any collaboration space, from meeting rooms, conference rooms, offices to classrooms across all industries.

STARVIEW ASIA
TECH FOR A BETTER WORLD

4K INTELLIGENT PROFESSIONAL NDI PTZ CAMERA

SVC-CAM4K60-AI12 / AI20 / AI30-T

Designed for professional broadcasting, educational recording, administrative meetings, and more, the camera offers a resolution of 4K at 60 frames per second (fps). Equipped with AI humanoid tracking algorithms and PTZ, it achieves stable tracking throughout the venue.



4K 60FPS | Optical Zoom | AI Presenter Tracking | Remote Control | Multiple Interfaces

Features

4K60FPS

SVC-CAM4K60-AI20 / SVC-CAM4K60-AI30-T utilize a UHD CMOS sensor with a 1/1.8-inch size and 8.42 million pixels.
SVC-CAM4K60-AI12 utilizes a UHD CMOS sensor with a 1/2.5-inch size and 8.51 million pixels.
Both models deliver images at a resolution of 4K at 60fps and are backward compatible with resolutions such as 1080P/720P.

Long Optical Zoom + UHD Lens

SVC-CAM4K60-AI12: Equipped with 4K Ultra HD wide-angle lens, supporting a maximum 12x optical zoom, and an 80.8° horizontal FoV.
SVC-CAM4K60-AI20 / SVC-CAM4K60-AI30-T: Equipped with 4K Ultra HD Long Focal Length Lens, supporting a maximum 20x optical zoom and a 60° FoV.

Virtual Studio

Compatible with the free-d protocol, it sends precise camera tracking information (pan/tilt/zoom/focus/aperture) to 3D production software, seamlessly blending real-life footage with 3D virtual backgrounds and characters to create a realistic virtual studio, offering a more immersive and interactive visual experience.

AI Presenter Tracking

Equipped with in-house-developed ReID technology, the device identifies the speaker's figure, appearance, and outfit. As the speaker moves within the room, the camera automatically tracks them, ensuring the target remains centered. Even if there are interferences or the speaker exits the frame, the camera swiftly recaptures and tracks them upon reentry.

Remote Control

SVC-CAM4K60-AI12 / SVC-CAM4K60-AI20: Multiple control options, including RS232, RS485, network, and USB for camera control.
SVC-CAM4K60-AI30-T: Multiple control options, including RS232, RS422/RS485, network, and USB for camera control.

Built-in Gravity

Support for automatic image flip, the camera can be installed, hanging, to meet the needs of more practical engineering projects.

Low-Light Enhancement

A brand-new CMOS image sensor with a 55dB SNR effectively reduces image noise in low-light conditions. The 3D noise reduction significantly lowers image noise, ensuring clear images in low-light situations.

Uncompressed Professional Video Output

SVC-CAM4K60-AI12 / SVC-CAM4K60-AI20: Supports HDMI 2.0 and 3G-SDI interfaces, allowing output of uncompressed digital video.
SVC-CAM4K60-AI30-T: Supports HDMI 2.0 and 12G-SDI interfaces, enabling uncompressed 4Kp60 digital video output.

Support Dante AV-H[1]

Transmit high-quality audio and video in real-time via Ethernet, compatible with Dante products. Control and manage with Dante Controller, using network time protocol for flexible and low-latency routing.

Supports NDI®|HX3[1]

This camera supports the next-generation network video transmission technology NDI®|HX3, featuring plug-and-play, low latency, and easy deployment. It supports simultaneous transmission of audio, video, and control signals.

Multiple Interfaces

SVC-CAM4K60-AI12 / SVC-CAM4K60-AI20: In addition to the HDMI 2.0 interface, it comes with a 3G-SDI interface with a transmission distance of 150 meters (1080p30). HDMI, 3G-SDI, USB, and LAN can simultaneously output three HD digital signals[2].
SVC-CAM4K60-AI30-T: In addition to the HDMI 2.0 interface, it features a 12G-SDI interface. HDMI, 12G-SDI, USB, and LAN can simultaneously output four HD digital signals.

Note:
1. This feature is optional.
2. For simultaneous output of four HD digital signals, please get in touch with the manufacturer for specific version support.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications **SVC-CAM4K60-AI12 / AI20 / AI30-T**

Difference	SVC-CAM4K60-AI12	SVC-CAM4K60-AI20	SVC-CAM4K60-AI30-T
Signal System	3G-SDI: 1080P60, 1080P50, 1080P30, 1080P29.97, 1080P59.94, 1080P25;1080I60, 1080I50, 1080I59.94; 720P60, 720P59.94		12G-SDI: 4KP60, 4KP59.94, 4KP50, 4KP30, 4KP25, 4KP29.97, 1080P60, 1080P50, 1080I60, 1080I50, 1080P30, 1080P59.94, 1080I59.94, 1080P29.97, 720P60, 720P59.94
Sensor	1/2.5-inch, CMOS, Effective Pixels: 8.51 MP	1/1.8-inch, CMOS, Effective Pixels: 8.42 MP	
Lens	12X, f=3.47mm~41.65mm, F1.84~F3.72	20X, f=6.25mm~125mm, F1.58~F3.95	
Horizontal FOV	80.8° ~ 7.5°	60° ~ 3.5°	
Vertical FOV	49.9° ~ 4.3°	35.7° ~ 2.0°	
USB Video Format	YUY2: Max.1080P30(USB3.0)[1]; YUY2: Max.1080P5(USB2.0); H.264 AVC: Max.2160P30; H.265 HEVC: Max.2160P30; MJPEG: Max.2160P30		YUY2: Max.1080P5; H.264 AVC: Max.2160P30; H.265 HEVC: Max.2160P30; MJPEG: Max.2160P30
HD Output	1 × HDMI: Version 2.0; 1 × 3G-SDI: BNC, 800mVp-p, 75Ω, as per SMPTE424M standard		1 × HDMI: Version 2.0; 1 × 12G-SDI: BNC, 800mVp-p, 75Ω, as per SMPTE2082 standard
USB Interface	1 × USB2.0: Type-C(Optional upgrade to USB3.0)		1 × USB2.0: Type-C
Control Interface	1 × RS485: 3pin phoenix port, Max Distance: 1200m, Protocol: VISCA / Pelco-D / Pelco-P		1 × RS422/RS485: 4/2pin phoenix port, Max Distance: 1200m, Protocol: VISCA / Pelco-D / Pelco-P
Camera Spec			
Signal System	HDMI: 4KP60, 4KP59.94, 4KP50, 4KP30, 4KP29.97, 4KP25, 1080P60, 1080P59.94, 1080P50, 1080P30, 1080P29.97, 1080I60, 1080I59.94, 1080I50, 1080P25, 720P60, 720P59.94		
Scanning Mode	Progressive		
Digital Zoom	16X		
Minimum Illumination	0.5Lux @ (F1.8, AGC ON)		
Shutter	1/30s ~ 1/10000s		
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR, specified color temperature		
Backlight Compensation	Support		
Digital Noise Reduction	3D Digital Noise Reduction		
SNR	≥ 55dB		
Tilt Angle	-30° ~ +90°		
Pan Angle	±162.5°		
Pan Speed	1.8° ~ 80° /s		
Tilt Speed	1.5° ~ 49° /s		
Image Flip & Freeze	Support		
PoE+	Support		
Preset Position	255		
Preset Accuracy	0.1°		
USB Spec			
Operating System Supported	Windows 7 (only supports UVC1.1 features), Windows 8 and above version, Mac OS X, Linux 2.4.6 and above version, Android needs to include the version of UVC-related drivers		

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-CAM4K60-AI12 / AI20 / AI30-T
USB Audio	Support
USB Video Class (UVC)	UVC 1.1~1.5
Color System / Compression	YUY2 / H.264 / MJPEG / H.265
UVC PTZ Control	Support
Network Spec	
Video Compression	H.265 / H.264 / MJPEG
Video Stream	First Stream, Second Stream
First Stream Resolution	3840x2160, 1920x1080, 1280x720, 1024x576 etc.
Second Stream Resolution	720×480, 320×240 etc.
Video Bit Rate	First Stream: 32kbps~51200kbps Second Stream: 32kbps~20480kbps
Bit Rate Control	VBR, CBR
Frame Rate	50Hz: 1fps~50fps, 60Hz: 1fps~60fps
Audio Bit Rate	96Kbps, 128Kbps
Protocols	Dante AV-H, NDI®|HX3, SRT, TCP/IP, HTTP, RTSP, RTMP(s), Onvif, DHCP, Multicast, Free-D etc.
Audio Compression	AAC
Input/Output Interface	
Network Interface	1 × RJ45: 10M/100M/1000M adaptive Ethernet
Audio Interface	1 × LINE IN: 3.5mm Jack
Restore Button	Support
Power Interface	JEITA type (DC IN 12V)
Control Interface	1 × RS232 IN: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA / Pelco-D / Pelco-P; 1 × RS232 OUT: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA only
Generic Spec	
Display	Support
Input Voltage	DC 12V /PoE+ (802.3at)
Input Current	2A (Max.)
Power Consumption	18W (Max.)
Dimensions (W x D x H)	223 × 163 × 166mm
Net Weight	1.8kg

Interface Diagram

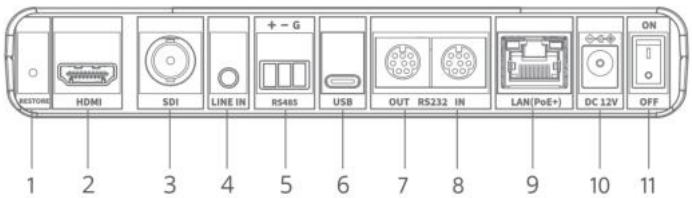

1 – RESTORE
2 – HDMI
3 – AI12/AI20: SDI; AI30-T: 12G-SDI
4 – LINE IN
5 – AI12/AI20: RS485; AI30-T: RS422/RS485
6 – USB
7 – RS232 OUT
8 – RS232 IN
9 – LAN
10 – DC 12V
11 – ON/OFF

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

FULL HD INTELLIGENT PROFESSIONAL NDI PTZ CAMERA

SVC-CAMHD60-AI20 / AI12 / AI30

Designed for activities such as work presentations and business negotiations, the cameras feature 1080P full HD telephoto lenses with 30× optical zoom, ensuring clarity at various distances. Equipped with AI automatic framing and humanoid tracking algorithms, these cameras provide a professional and intelligent meeting experience without manual intervention.



1080P Full HD | AI Presenter Tracking | ISP Image Algorithm | Low Latency | Multiple Interfaces

Features

1080P Full HD

Utilizing a 1/2.8-inch, 2.07 million effective pixel HD CMOS sensor, these cameras achieve a maximum resolution of 1920×1080.

High-Quality Optical Zoom + HD Lens

SVC-CAMHD60-AI20: Features a full HD telephoto lens with a maximum 20× optical zoom and a 60.7° horizontal FoV.
SVC-CAMHD60-AI12: Equipped with a full HD wide angle lens, supporting a classic 12× optical zoom with a 72.5° horizontal FoV.
SVC-CAMHD60-AI30: Utilizes a high-quality ultra-high-resolution full HD telephoto lens with a maximum 30x optical zoom and a 60.7° horizontal FoV.

ISP Image Processing Algorithm

It uses ISP image processing algorithms to enhance white balance and automatic exposure functions, significantly improving the camera's image output. Widely applied in industries such as education recording, remote education, video conferencing, live streaming, and broadcasting.

Auto Focus

Incorporating advanced focusing algorithms, the lens achieves rapid, accurate, and stable focusing.

Full Interface Low Latency

All video output interfaces meet low latency standards, supporting 4 simultaneous outputs, all capable of 1080P60.

AI Presenter Tracking

Equipped with in-house-developed ReID technology, the device identifies the speaker's figure, appearance, and outfit. As the speaker moves within the room, the camera automatically tracks them, ensuring the target remains centered. Even if there are interferences or the speaker exits the frame, the camera swiftly recaptures and tracks them upon reentry.

Support FULL NDI[2]

Support FULL NDI, which allows the transmission of NDI-encoded videos. They are also backward compatible with NDI®|HX2 protocol, which requires lower network bandwidth and enables low-latency transmission of H.265/H.264 encoded videos.

Note:
1. This feature is optional.
2. NDI is an optional feature, with a free trial of 25 minutes each time the device is powered on. A complete experience requires additional payment.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications **SVC-CAMHD60-AI20 / AI12 / AI30**

Difference	SVC-CAMHD60-AI20	SVC-CAMHD60-AI12	SVC-CAMHD60-AI30
Lens	20x, f4.42mm ~ 88.5mm, F1.8 ~ F2.8	12x, f3.5mm ~ 42.3mm, F1.8 ~ F2.8	30x, f4.42mm ~ 132.6mm, F1.8 ~ F2.8
Horizontal FOV	60.7° ~ 3.36°	72.5° ~ 6.9°	60.7° ~ 2.28°
Vertical FOV	34.1° ~ 1.89°	44.8° ~ 3.9°	34.1° ~ 1.28°
HD Output	1 x HDMI: Version 1.3; 1 x 3G-SDI: BNC, 800mVp-p, 75Ω, as per SMPTE 424M standard		
Protocols	FULL NDI, NDI|HX2, TCP/IP, HTTP, RTSP, RTMP, RTMP(s), Onvif, DHCP, Multicast, SRT, etc.		
Camera Spec			
Signal System	HDMI, 3G-SDI: 1080P60, 1080P59.94, 1080P50, 1080I60, 1080I59.94, 1080I50, 1080P30, 1080P29.97, 1080P25, 720P60, 720P59.94, 720P50		
Sensor	1/2.8-inch, CMOS, Effective Pixels: 2.07 MP		
Scanning Mode	Progressive		
Digital Zoom	16X		
Minimum Illumination	0.5Lux @ (F1.8, AGC ON)		
Shutter	1/30s ~ 1/10000s		
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR		
Backlight Compensation	Support		
Digital Noise Reduction	2D&3D Digital Noise Reduction		
SNR	≥ 55dB		
Pan Angle	±170°		
Tilt Angle	-30° ~ +90°		
Pan Speed	1.7° ~ 100° /s		
Tilt Speed	1.7° ~ 69.9° /s		
Image Flip & Freeze	Support		
Preset Position	255		
Preset Accuracy	0.1°		
Network Spec			
Video Compression	H.264 / MJPEG		
Video Stream	First Stream, Second Stream		
First Stream Resolution	1920x1080, 1280x720, 1024x576 etc.		
Second Stream Resolution	1280x720, 1024x576, 720x576 etc.		
Video Bit Rate	32kbps~20480kbps		
Bit Rate Control	VBR, CBR		
Frame Rate	1fps ~ 60fps		
Audio Compression	AAC		
Audio Bit Rate	96Kbps, 128Kbps, 256Kbps		
Audio			
Microphone Array	Built-in dual microphones, 100Hz to 16KHz frequency response.		
Analog Audio Input/Output	Support 3.5mm Line-In; Support 3.5mm Line-Out		
Digital Audio Output	Support HDMI, USB, LAN, 3G-SDI etc		

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-CAMHD60-AI20 / AI12 / AI30
Input/Output Interface	
Audio Interface	1 x Line In, 3.5mm Jack 1 x Line Out, 3.5mm Jack
Control Interface	1 x RS485: 2pin phoenix port, Max Distance: 1200m, Protocol: VISCA / Pelco-D / Pelco-P; 1 x RS232 IN: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA / Pelco-D / Pelco-P; 1 x RS232 OUT: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA only
Power Interface	JEITA type (DC IN 12V)
USB Spec	
Operating System Supported	Windows 7 (only supports UVC1.1 features), Windows 8 and above version, Mac OS X, Linux 2.4.6 and above version, Android needs to include the version of UVC-related drivers
Color System / Compression	YUY2 / H.264 / MJPEG
Video Format	Support a variety of different frame rates and resolution video formats, up to 1080p60 YUY2 output
USB Audio	32K Sampling Rate, Support UAC2.0
USB Video Class (UVC)	UVC 1.1~1.5
UVC PTZ Control	Support
Generic Spec	
Input Voltage	DC 12V / PoE+ (802.3at)
Input Current	1.5 A (Max.)
Operating Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Power Consumption	15W (Max.)
Dimension (W x D x H)	142 × 169 × 175mm
Net Weight	1.5kg

Interface Diagram

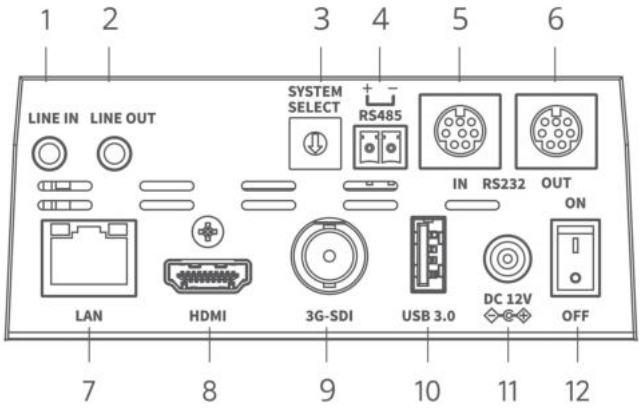

1 – LINE IN
2 – LINE OUT
3 – SYSTEM SELECT
4 – RS485
5 – RS232 IN
6 – RS232 OUT
7 – LAN
8 – HDMI
9 – 3G-SDI
10 – USB3.0
11 – DC 12V
12 – ON/OFF

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

4K PROFESSIONAL BOX CAMERA

SVC-BOXCAM4K-12 / 20

Designed for professional broadcasting, educational training, administrative meetings, and more, these cameras feature a 4K image sensor paired with an ultra-long optical zoom lens. Equipped with a digital array microphone, they effortlessly meet the requirements of various scenes. The cameras have built-in operation buttons, support infrared remote control, and web-based operation.



4K 60FPS | Long Optical Zoom | Built-in Microphone | PoE Support | Multiple Interfaces

Features

4K60FPS

Utilizing a 1/2.8-inch, 8.4 million pixels UHD CMOS sensor, it outputs 4K60FPS. It is also backward compatible with various resolutions, including 1080P and 720P.

20x Optical Zoom + HD Wide-Angle Lens

SVC-BOXCAM4K-20: Equipped with a full HD telephoto lens, supporting a maximum 20× optical zoom, and a 61.2° horizontal FoV.
SVC-BOXCAM4K-12: Utilizing a full HD lens, with a maximum 72.8° horizontal FoV and support for 12× optical zoom.

Built-in Button Controls

The camera has convenient onboard buttons for quick control, eliminating the need for a remote control and facilitating on-site installation and setup.

Full-Function Webpage

The device features a comprehensive webpage, allowing all configurations and applications to be completed through the web interface, greatly facilitating on-site equipment installation and setup.

TOF[1]

The camera is equipped with a laser-assisted autofocus system, utilizing advanced autofocus algorithms to achieve rapid and precise automatic focusing.

Note:
1. This feature is optional.

Support for 3G-SDI

It supports 3G-SDI outputting video streams at 1080P60 resolution, better meeting the requirements for image clarity and smoothness in professional fields.

Built-in Microphone

The camera features a built-in microphone array for 360° omnidirectional audio pickup. With noise suppression algorithms, it achieves clear audio pickup with a range of 6 meters.

Dual Infrared Receivers

The camera is designed with front and rear dual infrared sensors, significantly expanding the infrared reception range and enhancing the remote control experience.

Multiple Interfaces

It supports HDMI, SDI, USB, and network output, adapting well to diverse application scenarios.

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications **SVC-BOXCAM4K-12 / 20**

Difference	SVC-BOXCAM4K-12	SVC-BOXCAM4K-20
Optical Zoom	12x	20x
Horizontal FOV	72.8° ~ 6.8°	61.2° ~ 3.38°
Vertical FOV	44.1° ~ 3.8°	35.3° ~ 1.90°
Focal length	4.1mm ~ 49.2mm	4.7mm ~ 94mm
F No.	F1.8 ~ F2.68	F1.6 ~ F3.6
Camera Spec		
Signal System	HDMI: 4KP60, 4KP50, 4KP30, 4KP25, 4KP59.94, 4KP29.97, 1080P60 etc. 3G-SDI: 1080P60, 1080P50, 1080P30, 1080P25, 720P60 etc.	
Sensor	1/2.8-inch, CMOS, Effective Pixels: 8.4 MP	
Focus Mode	Auto, One Push, Manual	
Minimum Illumination	0.5Lux	
Shutter	1/30s ~ 1/10000s	
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR	
Backlight Compensation	Support	
Digital Noise Reduction	2D/3D Digital Noise Reduction	
SNR	≥ 55dB	
Anti-flicker	Support	
Image Flip & Freeze	Support	
PoE	Support	
Preset Position	255	
Device Operation		
Body Buttons	Quantity: 8; Features: zoom operation, brightness adjustment, menu control, image freezing, and focus mode switching	
Webpage	Full -Function Webpage	
Remote Control	360 ° infrared remote control support	
USB Spec		
Operating System Supported	Windows 7 (only supports UVC1.1 features), Windows 8 and above version, Mac OS X, Linux 2.4.6 and above version, Android needs to include the version of UVC-related drivers	
Color System / Compression	MJPEG / YUY2	
Video Format	YUY2: Max.1080P30, MJPEG: Max.2160P	
USB Audio	Support	
USB Video Class (UVC)	UVC 1.1	
Network Spec		
Video Compression	H.264 / H.265 / MJPEG	
Video Stream	First Stream, Second Stream	
First Stream Resolution	3840x2160, 1920x1080, 1280x720 etc.	
Second Stream Resolution	1920x1080, 1280x720, 1024x576 etc.	
Video Bit Rate	First Stream: 32Kbps~81920Kbps Second Stream: 32Kbps~6144Kbps	
Bit Rate Control	VBR, CBR	

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	**SVC-BOXCAM4K-12 / 20**
Frame Rate	50Hz: 1fps~50fps, 60Hz: 1fps~60fps
Audio Compression	AAC
Sampling Rate	48K
Audio Bit Rate	96Kbps, 128Kbps, 256Kbps
Protocols	NDI®|HX2, SRT, TCP/IP, HTTP, RTSP, RTMP(s), ONVIF, DHCP, Multicast, etc.
Input/Output Interface	
HD Output	1 x HDMI: Version 2.0; 1 x 3G-SDI: BNC, 800mVp-p, 75Ω, as per SMPTE 424M standard
Network Interface	1 x RJ45: 10M/100M/1000M adaptive Ethernet, Support: PoE(802.3af)
Audio Input	1 x Line In, 3.5mm Jack; 2 x Microphone input
Audio Output	1 x Line Out, 3.5mm Jack
USB Interface	1 x USB3.0, Type-C 1 x USB 2.0, Type-A(Host)
Control Interface	1 x RS485: 3pin phoenix port, Max Distance: 1200m, Protocol: VISCA / Pelco-D / Pelco-P
Power Interface	JEITA type(DC IN 12V)
Generic Spec	
Input Voltage	DC 12V /PoE (802.3af)
Input Current	1A (Max.)
Operating Temperature	-10° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Dimensions (W x D x H)	145 x 76 x 78.5mm

Interface Diagram

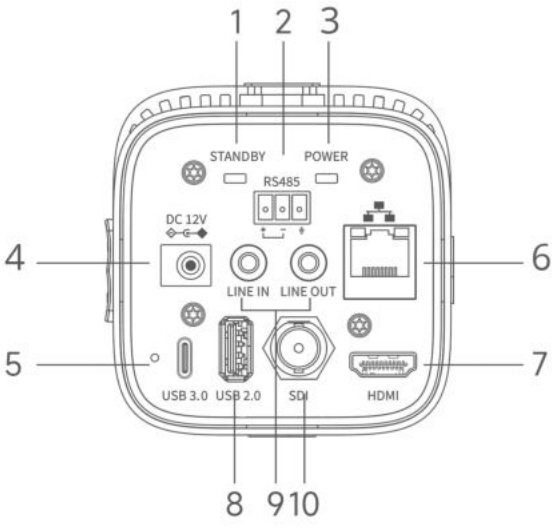

1 – STANDBY
2 – RS485
3 – POWER
4 – DC 12V
5 – USB 3.0 TYPE-C
6 – LAN
7 – HDMI
8 – USB2.0 TYPE-A
9 – LINE IN / LINE OUT
10 – 3G-SDI

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

BYOM DUAL-LENS PTZ VIDEO BAR

SVC-VBCAM4K-AI12-T

This device is designed specifically for medium to large corporate meeting spaces, integrating dual-lens ultra-high-definition audio and video capabilities. It features a 4K ultra-high-definition panoramic and close-up camera system, digital microphone, and full-range speaker in a unified design, simplifying wiring and facilitating easy installation. With built-in advanced AI video processing algorithms, it automatically adjusts the camera framing based on the meeting dynamics.



BYOM | Dual-Lens | PTZ | Audio 3A algorithm | AI-assisted shooting

Features

Dual-Lens Integration

This system features a dual-lens design with both panoramic and close-up lenses equipped with 4K UHD CMOS sensors, delivering clear and detailed images. The panoramic lens offers a wide 120° angle for an expansive field of view, while the close-up lens features a 70° wide angle and 12x optical zoom, supported by a ±90° rotating mechanical pan-tilt head to accurately capture distant meeting details.

All-in-One Integration

The device integrates a 4K panoramic camera, a 4K close-up camera, a digital microphone array, and a stereo speaker into a single unit, achieving high integration with minimal cabling. This streamlined setup ensures a professional audio-visual experience for meetings with ease of deployment.

Group Framing

Equipped with facial, human shape recognition, and intelligent framing algorithms, it can identify the number of participants and their positional changes, automatically moving the lens and adjusting the focus to achieve intelligent composition and optimal framing.

Speaker Tracking

The built-in sound source localization algorithm automatically directs the camera towards the speaker when someone is talking, presenting a close-up in the center of the screen, delivering a “face-to-face” communication experience.

Presenter Tracking

The speaker features built-in gesture recognition, ReID, and ReFace track and capture shots as the speaker moves. Recognition technologies allow it to activate tracking mode with simple gestures. The AI algorithm accurately identifies body shape and face, enabling the close-up camera to track automatically.

AI-Powered Audio 3A Algorithm

AI-driven audio algorithms based on deep learning effectively eliminate echo, noise, and reverb, ensuring clear full-duplex audio conversations.

8-Meter Pickup

The built-in 6 MEMS beamforming microphone array automatically locates the source of the speaker's voice and adjusts to precisely capture it, ensuring consistent audio pickup. Coupled with audio 3A processing algorithms, the pickup range of the device is 8 meters, meeting the needs of medium to large conference rooms.

POE Cascade Pickup

Built-in POE power supply network port, support cascade 3 SVC-MICARRAY-1 array microphones, can evenly cover a wider range of conference room scene, to provide equal and consistent pickup sound for each participant.

Full-Range Stereo Sound Reinforcement

Integrates a full-range high-fidelity speaker, professionally tuned to effectively reduce sound interference, outputting rich bass, full midrange, and clear treble, with natural and authentic human voices.

Wired and Wireless BYOM

Equipped with a built-in Wired Network or WiFi module, it supports participants using their familiar personal devices (such as laptops, smartphones, or tablets) to join meetings and access the integrated audio-video functions at any time. It also supports wired or wireless screen mirroring from computers to the device, allowing for local or remote meeting screen sharing without the need for cables.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-VBCAM4K-AI12-T
Close-up Camera	
Sensor	1/2.5-inch, CMOS, Effective Pixels: 8.29 MP
Focal Length	f=4.4~51.1mm, F1.8~2.6
Optical Zoom	12X
Horizontal FOV	70° ~7.4°
Vertical FOV	42° ~4.1°
Pan Angle	-90° ~ +90°
Tilt Angle	-23° ~ +23°
Pan Speed	1.7° ~ 76° /s
Tilt Speed	0.5° ~ 15° /s
PTZ	Support
Backlight Compensation	Support
Digital Noise Reduction	2D & 3D Digital Noise Reduction
SNR	≥ 50dB
Panoramic Camera	
Sensor	1/2.8-inch, CMOS, Effective Pixels: 8.51 MP
Focal Length	2.8mm
Diagonal FOV	120°
Horizontal FOV	110°
Vertical FOV	75°
EPTZ	Support
White Balance	Auto
Backlight Compensation	Support
Digital Noise Reduction	2D & 3D Digital Noise Reduction
SNR	≥ 50dB
Video Output SPEC	
Video Output Format	4KP30, 1080P30, 1080P60, 720P60
Audio Spec	
Speaker	2 full-range speakers, individual output power: 8W
Microphone Array	6 beamforming microphones with 8m pickup distance
Extended MIC	Supports up to 3 microphones via DMIC interface
Audio 3A Algorithm	AI-Powered AEC/ANC/AGC
Sampling Rate	Mic 48K, Speaker 48K
USB Spec	
Operating System Supported	Windows® 7 (only supports 1080p and below), Windows 8.1, Windows 10 or higher; MacOS ™ 10.10 or higher; Google ™ Chromebook ™ Version 29.0.1547.70 or higher; Linux (requires support for UVC)
Configuration Requirements	2.4 GHz Intel® Core 2 Duo processor or higher; 2GB memory or higher; USB 2.0 interface (4K requires USB 3.0)
Connection Type	USB 3.0, backward compatible with USB 2.0
Color System/Compression	H.264 / MJPEG / YUY2
USB Video Class (UVC)	UVC 1.1, UAC 1.0
UVC PTZ Control	Support (ePTZ)
Input/Output Interface	
USB 3.0	1 × USB 3.0, type-C, Support audio/video transmission and firmware upgrade 1 × USB 3.0, type-A, Reserved

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-VBCAM4K-AI12-T
HDMI	1 × HDMI OUT, 1 × HDMI IN
Network Interface	1 x RJ45, 10/100/1000M adaptive Ethernet port
EXT Interface	1 x RJ45, connects to expansion microphone or wired BYOM pod, and supports PSE power supply (IEEE802.3at)
Power Interface	DC 12V
WiFi	Wifi 5, 2.4G/5G Dual-band, IEEE802.11 a/b/g/n/ac
Remote Controller	Support
Generic Spec	
Safety Protection	Kingston anti-theft lock socket
Power	DC 12V
Operating Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Dimensions (W x D x H)	Without Stand: 600 x 127.1 x 182.1mm With Stand: 600 x 127.1 x 217.1mm
Net Weight	4kg

Interface Diagram

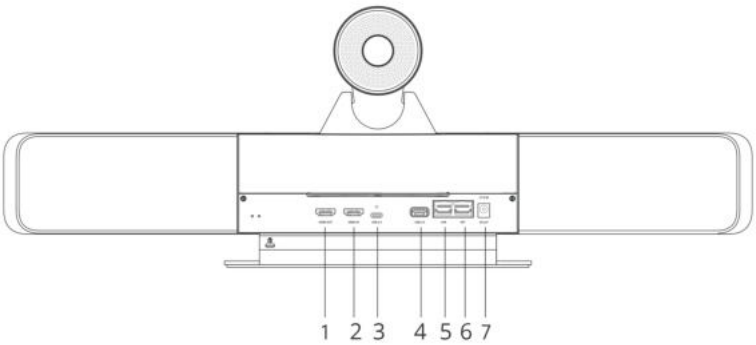

1 – HDMI OUT
2 – HDMI IN
3 – USB3.0
4 – USB3.0
5 – LAN
6 – EXT
7 – DC 12V

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

FULL HD VIDEO CONFERENCING PTZ CAMERA

SVC-PTZCAM-HD60-12

Designed for enterprise video conferences, personal office use, and teaching recordings, this camera features a high-quality HD CMOS image sensor. With a 60fps frame rate at 1080P and a wide-angle, long optical zoom lens, it vividly captures the entire meeting scene.



1080P Full HD | 12X Optical Zoom | Built-in Microphone | USB 3.0 | Remote Control

Features

1080P Full HD

Utilizing a 1/2.8-inch, 2.07 million pixels HD CMOS sensor, a maximum resolution of 1920x1080 for superior image quality, and a frame rate of 60fps at 1080P.

72.5° Wide-angle Lens + 12× Optical Zoom

Features a 72.5° wide-angle lens, supporting both 12x optical zoom and 16x digital zoom, ensuring clear capture at various distances.

Built-in Microphone[1]

Supports an optional built-in microphone with a pickup distance of 6 meters, providing low noise and high-quality audio for meeting and live broadcasting needs.

Multiple Control Options

Supports control through RS232 (optional RS485) serial ports, network, and USB interfaces.

H.264 Slice / H.264 SVC Encoding Support

Output H.264 streaming supports Slice and SVC encoding modes, suitable for high-end USB conference video applications.

Low Light Enhancement

The camera ensures clear images in low-light situations by using a CMOS image sensor of 55dB SNR and a 2D & 3D noise reduction to reduce image noise in low-light conditions.

Multiple Interfaces

Supports simultaneous output of two 1080P video streams through HDMI and USB 3.0, allowing connection to various peripherals.

Full-Function USB Interface

Full-featured USB3.0 interface, support audio and video output, support encoding output, support UVC v1.1 protocol.

Note:
1. This feature is optional.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-PTZCAM-HD60-12
Camera Spec	
Signal System	1080P60, 1080P50, 1080P30, 1080P25, 720P60, 720P50
Sensor	1/2.8-inch, CMOS, Effective Pixels: 2.07 MP
Scanning Mode	Progressive
Digital Zoom	16X
Lens	12X, f3.5mm ~ 42.3mm, F1.8 ~ F2.8
Minimum Illumination	0.5Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
SNR	≥ 55dB
Horizontal FOV	72.5° ~ 6.9°
Vertical FOV	44.8° ~ 3.9°
Pan Angle	±170°
Tilt Angle	±30°
Pan Speed	1.61° ~ 75.56° /s
Tilt Speed	0.44° ~ 15° /s
Image Flip	Support
Image Freeze	Support
Preset Position	255
Preset Accuracy	0.1°
Microphone	Optional
Pick-up Distance	6m
Input/Output Interface	
HD Output	1 x HDMI1.4b
USB Interface	USB 3.0
Audio Interface	1 x Line In, 3.5mm Jack
Control Interface	1 x RS232 IN: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA / Pelco-D / Pelco-P 1 x RS232 OUT: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA only
Power Interface	JEITA type (DC IN 12V)
USB Spec	
Operating System Supported	Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android
Color System / Compression	YUY2 / H.264 / MJPEG
Video Format	YUY2: Max. 1080P60; H.264 AVC: Max. 1080P60; MJPEG: Max. 1080P60
USB Audio	Support
USB Video Class (UVC)	UVC 1.1
UVC PTZ Control	Support
Generic Spec	
Input Voltage	DC 12V
Input Current	1A
Operating Temperature	-10° C ~ 40° C
Storage Temperature	-40° C ~ 60° C

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-PTZCAM-HD60-12
Power Consumption	12W
No Failure Time	>30000 hours
Dimensions (W x D x H)	99 × 128 × 154mm
Net Weight	0.9kg

Interface Diagram

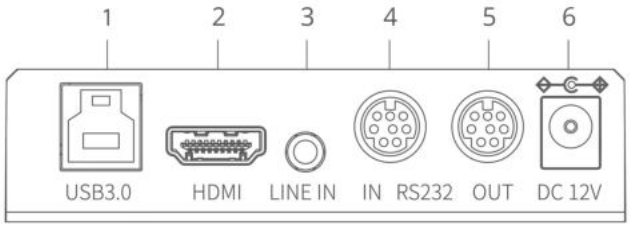

1 – USB3.0
2 – HDMI
3 – LINE IN
4 – RS232 IN
5 – RS232 OUT
6 – DC 12V

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

4K BUSINESS WEBCAM

SVC-USBCAM-4K

Designed for small to medium-sized meeting rooms, equipped with a 120° ultra-wide-angle lens. It features a 1/2.5-inch 4K CMOS sensor, delivering a 3840x2160 resolution. With the included damping rotary bracket, it adapts to mainstream displays.



4K UHD | 120° Wide-Angle | Built-in Microphone | USB 3.0 | Auto Framing

Features

4K UHD

Utilizing a 1/2.5-inch 4K CMOS sensor with 8.29 million pixels, the webcam supports a 4K@30fps image encoding output while being backward-compatible with resolutions such as 1080P and 720P.

Wide FoV

Equipped with a 120° ultra-wide-angle lens, the viewing range is increased by 50%, easily covering full conference scenarios, or live streaming panoramic views, bringing you a broad and comprehensive visual capture experience.

Auto Framing by AI Technology

Built-in video AI algorithm recognizes the positions of participants, automatically adjusting the lens angle to achieve the best-framed shot.

Note:

1. This feature is optional.

Built-in Microphone

The camera comes with two sets of digital microphones equipped with a noise suppression algorithm, ensuring a clear audio pickup of 6 meters.

USB 3.0

Full-function USB 3.0 interface, integrating power supply, video, and audio, supports output of first video stream USB video signal + audio source, with optional support for first video stream HDMI output.


Simplified Installation

The camera includes a damping rotary bracket, compatible with most displays, ensuring a simple and stable installation.

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-USBCAM-4K
Camera Spec	
Sensor	1/2.5-inch, CMOS, Effective Pixels: 8.29 MP
Scanning Mode	Progressive
Type of Lens Mount	M12
Lens	f=2.8mm, Horizontal FOV: 120°
Digital Zoom	8X
Minimum Illumination	0.5Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
Bracket	Support
Audio Features	
Microphone	2 × Built-in microphone
Pickup Distance	6m effective pickup
Generic Spec	
Input Voltage	5V (USB Power Supply)
Input Current	600mA
Operating Temperature	-10° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Power Consumption	3W
Dimensions (W x D x H)	194 x 42 x 34mm
Net Weight	0.5kg
USB Spec	
Operating System	Windows 7 (only supports UVC 1.1 features), Windows 8 and above version, MacOS 10.5 and above version, Linux 2.4.6 and above version, Android needs to include the version of UVC-related drivers
Color System / Compression	YUY2 / H.264 / MJPEG
Signal System	4KP30/25; 1080P30/25; 720P30/25; 960x540P30/25; 640x360P30/25 etc
USB Video Class (UVC)	UVC 1.1
UVC PTZ Control	Support (EPTZ)
Input/Output Interface	
USB Interface	1 x USB 3.0, type B

Interface Diagram

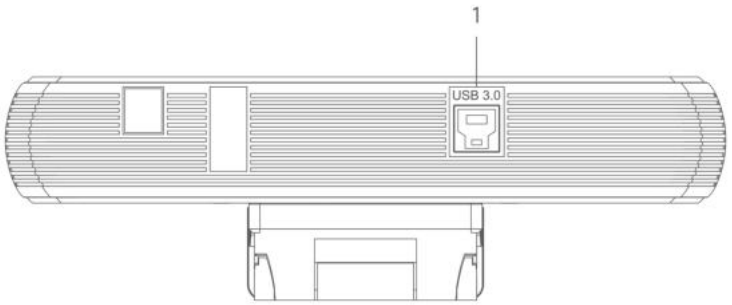

1 – USB3.0

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

1080P ALL-IN-ONE USB WEBCAM

SVC-USBCAM-4KAI-T

This device is a mini USB audio-video all-in-one device designed specifically for small meeting rooms and personal offices. It integrates a HD camera, omnidirectional microphone and fullrange speaker in a three-in-one design, greatly simplifying the wiring process. With USB connectivity, it can be used instantly without any configuration, making video conferencing simple and enjoyable.



1080P | Three-in-One | Audio 3A algorithm | Full Range Speaker | Landscape and Portrait Mode

Features

Integrated Bionic Design
The integrated design combines a HD camera, highly sensitive omnidirectional microphone and full-range speaker in one device, allowing for easy plug-and-play setup with simple wiring. The unique bionic design provides an excellent audiovisual conference experience.

Full HD Wide-Angle Lens
Equipped with a high-quality HD CMOS sensor, it offers a maximum output of 1080@30fps/25fps image encoding. The horizontal field of view can reach 90°, ensuring distortion-free images at the edges.

360° Omnidirectional Pickup
With a digital microphone, it achieves 360° pickup sensitivity of -30±2dB. The volume automatic gain control algorithm ensures balanced and clear audio pickup from any position.

Audio 3A Algorithm
It features a built-in Audio 3A algorithm (AEC/AGC/ANS) for full-duplex conversation. It automatically balances volume levels during audio capture while effectively suppressing noise, resulting in clear and balanced sound quality.

TOF High-speed Focusing
The laser-assisted focusing instrument with advanced auto focusing algorithm is to realize high-speed and accurate auto focusing.

Landscape and Portrait Mode
Support one-key landscape and portrait switching output to meet the needs of various landscape and portrait live scenes.

Harman Tuned Speaker
The device uses a Harman-tuned speaker with a ducted sound chamber, delivering excellent playback performance. The high frequencies are clear and penetrating, while the low frequencies are natural and powerful, providing full and clear voice reproduction.

Electronic Pan-Tilt
The device incorporates an electronic pan-tilt mechanism, eliminating the need for mechanical rotating devices. It offers precise rotation, noise-free operation, and enhanced durability. It also supports 4X digital zoom.

Privacy Cover Design
The camera is equipped with an integrated sliding privacy cover that can be closed at any time to protect the privacy of participants.

Easy Installation
It can be easily installed using a damping rotating axis bracket, compatible with almost 100% of the monitors available in the market. The installation process is simple, stable, and reliable.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.


For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-USBCAM-4KAI-T
Camera Spec	
Sensor	1/2.8", CMOS, 2.07 Megapixels
Scanning Mode	Progressive
Type of Lens Mount	M12
Lens	f=2.8mm, Horizontal FOV: 90°
AF	Support TOF Focus
Minimum Illumination	0.5Lux @ (F2.0, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Manual, VAR
Bracket	Standard equipped damped rotating bracket
Physical Privacy Security	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
Backlight Compensation	Support
Digital Zoom	4X
Input/Output Interface	
USB Interface	1 x USB 2.0, Type C
General Specification	
Input Voltage	5V (USB Power Supply)
Input Current	0.5A (Max.)
Operating Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Power Consumption	2.5W (Max.)
Dimension (W x D x H)	121 × 32 × 31mm (Non-bracket)
Net Weight	0.2kg
USB Features	
Operating System	Windows® 7 (only supports 1080P and below supported), Windows 8.1, Windows 10 or higher; MacOS™ 10.10 or higher; Google™ Chromebook™ Version 29.0.1547.70 or higher; Linux (Support UVC)
Hardware Requirements	2.4 GHz Intel® Core 2 Duo Processor or higher 2 GB memory or higher USB 2.0
Color System / Compression	YUY2 / H.264 / MJPEG
Video Format	1080P30/25, 720P30/25, 960x540P30/25, 640x360P30/25
USB Video Communication Protocol	UVC 1.1
UAC	Support
UVC PTZ Control	Support (ePTZ)
Audio Features	
Audio 3A Algorithm	Support AEC/AGC/ANS
IR Remote Control	82 dB SPL at 0.5 m
Microphone	360° omnidirectional microphone, Sensitivity: -30±2dB

Interface Diagram

1 – USB Interface

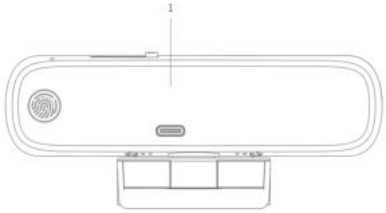

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

BROADCASTING-LEVEL PTZ CAMERA

SVC-BCAM3GS-4K60-20-T

This camera stands as a testament to technological innovation in the AV industry, offering versatile solutions for television studios, sports facilities, grand theaters, multi-functional halls, and large conference rooms. It delivers broadcast-grade video content characterized by cinematic visual fidelity, ensuring that every frame, whether capturing a wide panorama or intricate details, provides an unparalleled viewing experience.



4/3" CMOS Sensor | 4K UHD | OIS | AI-Assisted Shooting | Multiple Interfaces

Features

4/3" CMOS Image Sensor

The camera is equipped with a powerful 4/3" UHD CMOS sensor, which effectively reduces high-brightness and low-brightness noise and outputs an incredible 4K (3840x2160) 60fps without any artifacts.

20x Optical Zoom

Employs a true 4K lens, with 71° HFoV and 20X optical zoom, capturing both large scenes and minute details clearly for an enriched video experience.

EIS Dynamic Stabilization

Equipped with EIS image stabilization technology, it analyzes the differences between frames in real-time and automatically compensates for blurring caused by external environmental shakes, camera movement, or rotation. Even when shooting handheld, on a track, or with a camera arm, it provides smooth and stable image effects.

High-Precision Mechanical Pan-Tilt Head

Featuring the latest high-speed, high-torque, high-precision motors and a graded dual-layer transmission mechanism, the pan-tilt head offers enhanced sensitivity. Advanced motion backlash handling and motor raft design contribute to more accurate rotation. The head can automatically adjust its horizontal rotation speed (0.1° ~ 80°/s) based on the lens zoom, facilitating easy high-speed movements or fine shooting adjustments.

Powerful AI Tracking

Built-in self-developed ReID and FaceID AI algorithm can achieve high-precision subject recognition and focusing based on information such as human skeletal structure, body shape, posture, and clothing, enabling accurate tracking and shooting of moving targets even in complex environments.

Multi-protocols Compatibility

Support NDI®|HX2, Dante AV-H, SRT, TCP/IP, HTTP(S), RTSP, RTMP(S) and other protocols.

Three-gear Independent ND Filter

Built-in ND 1/4, 1/16, 1/64 three-gear ND filter; the camera can automatically adjust the ND filter gear based on the ambient illumination to get the best exposure and image.

Virtual Studio

Compatible with the free-d protocol, it sends precise camera tracking information (pan/tilt/zoom/focus/aperture) to 3D production software, seamlessly blending real-life footage with 3D virtual backgrounds and characters to create a realistic virtual studio, offering a more immersive and interactive visual experience.

Front and Rear Tally Light

To ensure a smooth and error-free shooting process, the camera is equipped with 2 front and 1 rear Tally lights, which display the current status of the camera in red and green color, so that photographers and other people can quickly discern the camera's working status from different light.

Multiple Interfaces

Supports simultaneous streaming of high-definition digital signals via HDMI, 12G-SDI, 3G-SDI, USB and LAN; supports SFP+ fiber optic transmission, XLR & Line audio signal transmission, GenLock & Time Code audio and video signal synchronization, TF Card local file storage, etc., widely applicable in radio and television live broadcasts, event live broadcasts, remote conferences, and other scenarios.

Optional Interfaces

Except for the standard I/O, the camera also offers a range of customized I/O and protocols like Full NDI, Dante AV Ultra, HDBaseT, ST2110, SDVOE to cater to the diverse needs of our customers.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-BCAM3GS-4K60-20-T
Camera	
Video Resolution	HDMI/12G-SDI: 4KP60, 4KP59.94, 4KP50, 4KP30, 4KP29.97, 4KP25, 4KP24, 4KP23.98, 1080P60, 1080P59.94, 1080P50, 1080P30, 1080P29.97, 1080P25, 1080P24, 1080P23.98, 1080I60, 1080I50, 1080I59.94, 720P60, 720P59.94 3G-SDI: 1080P60, 1080P59.94, 1080P50, 1080P30, 1080P29.97, 1080P25, 1080P24, 1080P23.98, 1080I60, 1080I50, 1080I59.94, 720P60, 720P59.94
Sensor	4/3-inch, CMOS, Effective Pixels: 20 MP
Scanning Mode	Progressive
Lens	20X, f 9.79mm ~ 186.5mm, F2.8 ~ F4.5
Digital Zoom	16X
Minimum Illuminance	0.5Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
ND Filter	Built in (OFF, 1/4, 1/16, 1/64)
Image Stabilization	Default configuration features EIS, with optional OIS available
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR, specified color temperature
Backlight Compensation	Support
Digital Noise Reduction	3D Digital Noise Reduction
Video S/N	≥ 55dB
HFOV	71° ~4.05°
VFOV	39.6° ~ 2.2°
Horizontal Rotation Range	±172°
Vertical Rotation Range	-30° ~ +120°
Pan Speed Range	0.1° ~ 80° /s
Tilt Speed Range	0.1° ~ 60° /s
Image Flip & Freeze	Support
PoE+	Support
Number of Preset	255
Preset Accuracy	0.1°
Network Spec	
Video Compression	H.264 / H.265 / MJPEG
Video Stream	First Stream, Second Stream
First Stream Resolution	3840x2160, 1920x1080, 1280x720, 1024x576 etc.
Second Stream Resolution	720x576, 720x480, 320x240 etc.
Video Bit Rate	32kbps~81920kbps
Bit Rate Type	CBR, VBR
Frame Rate	P50: 1fps~50fps, P60: 1fps~60fps
Audio Compression	AAC
Audio Bit Rate	96Kbps, 128Kbps
Support Protocols	NDI®|HX3, Dante AV-H, Free-D, SRT, TCP/IP, HTTP(S), RTSP, RTMP(S), Onvif, DHCP, Multicast, etc.
USB Features	
Operating System	Windows 7/8/10, macOS, Linux, Android
Color System/Compression	YUY2 / H.264 / MJPEG / H.265
Video Format	YUY2: Max.1440P30 H.264 AVC: Max.2160P60 H.265 HEVC: Max.2160P60 MJPEG: Max. 2160P60
USB Audio	Support

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	**SVC-BCAM3GS-4K60-20-T**
USB Video Class (UVC)	UVC 1.1
UVC PTZ Control	Support
Input/Output Interface	
HD Output	1 x HDMI: 2.0 1 x 12G-SDI: BNC type, 800mVp-p, 75Ω, Comply with SMPTE 2082-1 standard 1 x 3G-SDI: BNC type, 800mVp-p, 75Ω, Comply with SMPTE 424M standard
Genlock Interface	1 x BNC type, 75Ω, Input only
Timecode Interface	1 x BNC type, 75Ω, Input only
Network Interface	1 x RJ45: 10M/100M/1000M adaptive thernmet
Audio Interface	1 x Line In, 3.5mm Audio Interface; 1 x Line Out, 3.5mm Audio Interface; 2 x Badaptive ethernet, XLR interface; 2 x Mic input.
USB Interface	1 x USB3.0, Type-C type
Communication Interface	1 x RS232 In: RJ45, VISCA/Pelco-D/Pelco-P protocal; 1 x RS485/422 in: RJ45, VISCA/Pelco-D/Pelco-P protocal; 1 x RS422 out: RJ45, VISCA/Pelco-D/Pelco-P protocal.
SD Card	1 Micro SD
Restore Button	Support
Power Interface	JEITA type (DC IN 12V)
Optional I/O	1 x RJ45: FULL NDI; 1 x RJ45: Dante AV Ultra; 1 x RJ45: HDBaset; 1 x SFP+: ST2110; 1 x SFP+: SDVOE
General Specification	
Installation	Head-up, Head-down(ceiling)
TALLY Light	3 (Red and Green Dual-color)
Power Indicator	1 (Blue)
Status Indicator	2 (Green, Red)
IR Remote Control	Support
Input Voltage	DC 12V / POE ++
Input Current	5A (Max.)
Dimensions (W x D x H)	205 × 237 × 272mm
Weight	4.8 kg

Interface Diagram

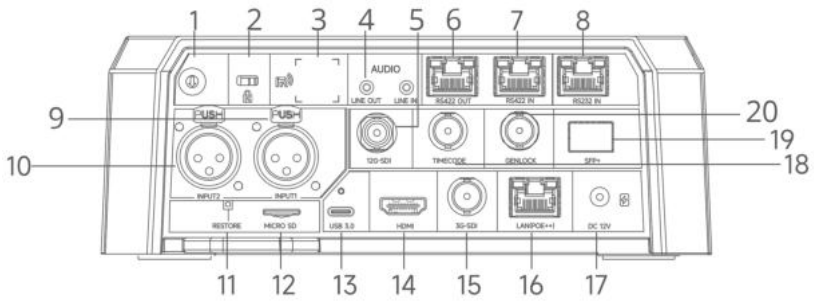

1 – Video Rotary Switch
2 – Security Lock
3 – Infrared Window
4 – LINE OUT/IN
5 – 12G-SDI
6 – RS422 OUT
7 – RS422 IN
8 – RS232 IN
9 – INPUT1
10 – INPUT2
11 – RESTORE
12 – MICRO SD
13 – USB3.0
14 – HDMI
15 – 3G-SDI
16 – LAN (PoE++)
17 – DC 12V
18 – TIME CODE
19 – SFP+
20 – GENLOCK

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

HDR10 4K PROFESSIONAL PTZ CAMERA

SVC-PCAM3GS-4K60-20-T / PCAM12GS-4K60-20-T

As a revolution of Pro AV camera, this camera integrates 10-bit color depth and BT2020 wide color gamut technology, delivering images with exceptionally rich details and stunning effects. Featuring a 50MP sensor and a 20X optical lens, it captures intricate details, from the nuanced expressions of educators in online classes to the intricate paths of light particles on stage. Enhanced with AI-driven intelligent tracking, it effortlessly tracks fast-moving subjects, excelling in complex shooting scenarios like live broadcasting, virtual meetings, educational settings, and remote command operations, ensuring every frame is captured with precision.



4K HDR | 50 Megapixel Sensor | 1080P/120fps | PDAF | HDR10

Features

50MP Ultra-High-Resolution Sensor

Equipped with a 1/1.55-inch 50MP CMOS sensor for unmatched clarity and cinematic video output. Support various video output resolutions, maximum 4K60fps and lower resolution like 1080P, 720P and etc.

120fps High Frame Rate

Supports 1080P at 120fps for smooth, high-quality video capture, perfect for fast-moving scenes like live sports broadcasts, significantly enhances video fluidity and real-time performance.

PDAF (Phase Detection Autofocus)

Built-in PDAF (Phase Detection Autofocus) technology, can accurately calculate the focus position using optical phase differences, enabling very fast and precise Auto focus.

HDR10: A Comprehensive Revolution in Lighting and Color

Supporting the BT.2020 color standard, which doubles the color gamut range compared to BT.709, this technology offers a more realistic representation of light and dark contrasts. It can depict colors that are closer to human perception, with light and dark contrasts that more accurately reflect the real world, defining the colors of the future.

20X Optical Zoom + 60° HFoV Lens

Featuring a premium ultra-high resolution lens with 60° HFoV and up to 20x optical zoom. This system delivers crystal-clear imaging across all distances - from intimate close-ups to expansive distant shots.

Multiple interfaces

Support simultaneous streaming of high-definition digital signals via HDMI, 12G-SDI(Optional), 3G-SDI, USB and LAN; Support multiple ways of control, RS422, RS485, IP and USB, widely used in various scenarios such as virtual studios, live streaming, broadcasting, virtual education and etc.

Tally light

Equipped with 1 front and 1 rear Tally lights, enables operators to effortlessly access the camera's live status, with visual indicators helping users quickly grasp the camera's working status.

AI-Powered Presenter Tracking

Featuring proprietary ReID and FaceID AI algorithms, the camera precisely identifies and focuses on subjects based on skeletal structure, body shape, posture, and clothing. Even in complex environments, it accurately tracks and captures moving targets, keeping them in clear focus and at the center of the frame.

Built-in Filter Mount for One-Touch Switching

The camera body features a pre-installed filter mount, compatible with Neutral Density (ND) and Circular Polarizing (CPL) filters for immediate use. With a single touch, effortlessly address issues like strong light overexposure and reflective interference, easily achieving dynamic light and shadow control along with color depth optimization. Even photography beginners can capture cinematic-quality footage.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-PCAM3GS-4K60-20-T / PCAM12GS-4K60-20-T
Camera	
Signal System	HDMI/12G-SDI: 4KP60, 4KP50, 4KP30, 4KP25, 4K24, 4KP59.94, 4KP29.97, 4K23.98, 1080P120, 1080P100, 1080P60, 1080P50, 1080P30, 1080P25, 1080P24, 1080P59.94, 1080P29.97, 1080P23.98, 720P60, 720P50, 720P59.94 (12G-SDI Only SVC-PCAM12GS Support) 3G-SDI: 1080P60, 1080P50, 1080P30, 1080P25, 1080P24, 1080P59.94, 1080P29.97, 1080P23.98, 1080I60, 1080I50, 1080I59.94, 720P60, 720P50, 720P59.94
Sensor	1/1.55-inch, CMOS, Effective Pixels: 50MP
Scanning model	Progressive
Lens	20X, f=6.55~126mm, F1.8~4.5
Digital Zoom	16X
Minimum Illumination	0.5Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Automatic, indoor, outdoor, one-key operation, manual, specified color temperature
Backlight Compensation	Support
Digital Noise Reduction	3D Digital Noise Reduction
SNR	≥ 55dB
Horizontal FoV	60.5° ~3.49°
Vertical FoV	36.6° ~ 1.99°
Tilt Aange	±170°
Pan Aange	-30° ~ +90°
Pan Speed Range	1.7° ~100° /S
Tilt Speed Range	1.7° ~69.9° /S
Image Flip & Freeze	Support
PoE+	Support
Preset Positions Number	255
Preset Position Accuracy	0.1°
USB	
Support Operating System	Windows 8, 10, 11, MacOSX, Linux2.4.6 and later versions, Android versions that include UVC-related driver programs.
Color Space/Compression	YUY2 / H.264 / MJPEG
Video Format	YUY2: Up to 1080P30 H.264: Up to 4KP60 MJPEG: Up to 4KP60
USB Audio	Support
USB Video Class (UVC)	UVC 1.1
UVC PTZ Control	Support
Network	
Video Compression	H.264 / H.265 / MJPEG
Video Stream	First Stream, Second Stream
First Stream Resolution	3840x2160, 1920x1080, 1280x720, 1024x576, 720x480, 720x408, 640x480, 640x360
Second Stream Resolution	720x480, 720x408, 640x480, 640x360, 480x320, 320x240
Bit Rate	First stream: 32kbps~51200kbps Second stream: 32kbps~20480kbps
Bit Rate Control	Variable Bit Rate, Fixed Bit Rate
Frequency	1fps~60fps, 120fps(1080P and below only)
Audio Compression	AAC
Audio Bit Rate	96Kbps, 128Kbps
Support Protocols	NDI6, TCP/IP, HTTP, RTSP, RTMP, ONVIF, DHCP, SRT, Multicast and etc.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	**SVC-PCAM3GS-4K60-20-T / PCAM12GS-4K60-20-T**
Input/Output Interface	
HD Output	1 x HDMI: 2.0; 1 x 3G-SDI: BNC type, 800mVp-p, 75Ω, Comply with SMPTE 424M standard; 1 x 12G-SDI: BNC type, 800mVp-p, 75Ω, Comply with SMPTE 424M standard (12G-SDI Only SVC-PCAM12GS Support)
Network	1 x LAN: 10M/100M/1000Mbps adaptive ethernet
USB	1 x USB2.0, Type-A, Host Interface(Reserved) 1 x USB3.0, Type-C(for audio and video signal transmission)
Audio	1 x Line in: 3.5mm Audio Interface; 1 x Line out: 3.5mm Audio Interface;
Communication interface	1 x RS422 IN/RS485: RJ45, VISCA/Pelco-D/Pelco-P protocol 1 x RS422 OUT: RJ45, VISCA/Pelco-D/Pelco-P protocol
SD Card	1 Micro SD
Restore Button	Support
Power Interface	JEITA type (DC IN 12V)
Generic	
Input Voltage	DC 12V/PoE+ (802.3at)
Input Current	3A (Max.)
Working Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Dimensions (W x D x H)	170 × 196 × 228mm
Net weight	2.3kg

Interface Diagram

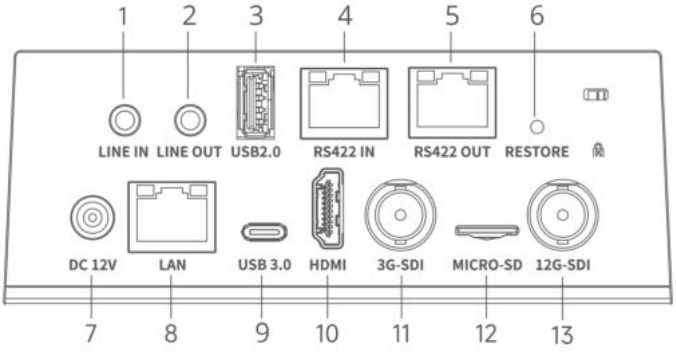

1 – LINE IN
2 – LINE OUT
3 – USB 2.0
4 – RS422 IN
5 – RS422 OUT
6 – RESTORE
7 – DC 12V
8 – LAN
9 – USB 3.0
10 – HDMI
11 – 3G-SDI
12 – MICRO SD
13 – 12G-SDI (SVC-PCAM12GS Support)

Copyright © 2026 STARVIEW ASIA. All rights reserved.

Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

360 PANORAMIC CAMERA

SVC-PanCAM-4K30

This device is designed specifically for small to medium conference room settings, featuring a 360° video capture system composed of four ultra-wide-angle lenses tailored for meeting scenarios, providing a complete panoramic view of the venue. It integrates an omnidirectional microphone and a full-range speaker system for a simplified and convenient conferencing process. Equipped with multiple AI audio-visual algorithms, it enables remote participants to feel as if they are present in the meeting, creating a comprehensive and immersive visual experience.



360° Panoramic View | AI-assisted shooting | PoE Cascading | Separable Speakers | All-in-one

Features

Integrated Design

The device boasts a unified architecture that integrates a 360° panoramic camera with four lenses, an array microphone with beamforming technology, and a full-range speaker (for the standalone model). Both audio-video transmission and power can be managed via a PoE (Power over Ethernet) cable for streamlined installation, delivering a professional and smart remote collaboration experience.

Seamless 360° Panoramic View

The camera features four ultra-wide-angle lenses, creating a 360° surround video capture system. Utilizing advanced AI stitching technology, it flawlessly merges multiple images to produce a 360° panoramic view, providing a complete visual representation of the meeting space.

4K UHD Image Quality

The system is equipped with four sets of cameras, each featuring a 1/2.8 inch high-quality UHD CMOS sensor with 8.29 million pixels. It supports 4K (3840x2160)@30fps ultra-high-definition video capture. Utilizing video stitching algorithms, it can achieve a 16Kx2K panoramic video display, ensuring clear and delicate imagery in every frame for a visually stunning experience.

Group Framing

Equipped with facial, human shape recognition, and intelligent framing algorithms, it can identify the number of participants and their positional changes, automatically moving the lens and adjusting the focus to achieve intelligent composition and optimal framing.

Speaker Tracking

The built-in sound source localization algorithm automatically directs the camera towards the speaker when someone is talking, presenting a close-up in the center of the screen, delivering a “face-to-face” communication experience.

Smart Gallery

Featuring AI algorithms for heads, faces, and human shapes, it can automatically switch to multi-split screen layouts based on the number of participants, extracting and evenly arranging close-ups of each participant. This allows remote attendees to clearly see everyone, making the communication in meetings more vivid and natural.

PoE Cascading Audio Pickup

Equipped with a built-in array of 7 beamforming microphones, this system can guide the microphone directly to the speaker, ensuring clear and precise audio capture with an effective pickup distance of up to 2 meters. Supports PoE (Power over Ethernet) for cascading two units together, providing more comprehensive coverage, a wider pickup range, and more balanced audio quality.

Lift Privacy Cover

Equipped with a built-in electric lift for privacy protection, the cover can be easily operated with a single button. When the camera is not in use, closing the privacy cover ensures that no images are captured, protecting personal or corporate sensitive areas.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-PanCAM-4K30
Camera Specifications	
Sensor	Four 1/2.8 inch CMOS Sensors, Effective Pixels Per Lens: 8.29 Million
Signal System	4KP30, 1080P30, 720P30 etc.
Optical Lenses	Four sets of 135° (HFOV) fixed-focus lenses
Digital Noise Reduction	2D&3D Digital Noise Reduction
SNR	≥ 55dB
Backlight Compensation	Support
Audio Specifications	
Microphone Array	A 7-unit beamforming digital microphone array, 2m pickup distance
Extended Microphone	Supports the expansion of digital array microphones through a PoE
USB Specifications	
Connection Type	USB 3.0, backward compatible with USB 2.0
Color System / Compression	MJPEG / YUY2
USB Video	Supports a sampling rate of 32K
USB Video Communication Protocol	Support UAC1.0, UVC 1.1
UVC PTZ Control	Support
I/O	
USB 3.0	1 × USB 3.0, type-C, Support audio/video transmission and firmware upgrade
Network Interface	1 × RJ45, Supports connection of extension microphones or cascading with RC360 Pro, support PSE power 1 × RJ45, 10/100/1000M adaptive Ethernet port, support for network transmission of audio and video, support for POE power supply
Power Interface	DC 12V
Others	
Installation Method	Supports placement on a desk
Supplied Cable	USB Cable
Safety Protection	Anti-theft lock socket
General Specifications	
Power	DC 12V, 2A(Max.)
Operating Temperature	0°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Dimension	Body dimensions: 281.5mm (H) x 83.8mm (Ø) Base dimensions: 33.5mm (H) x 180mm (Ø)
Net Weight	1.5Kg

Interface Diagram

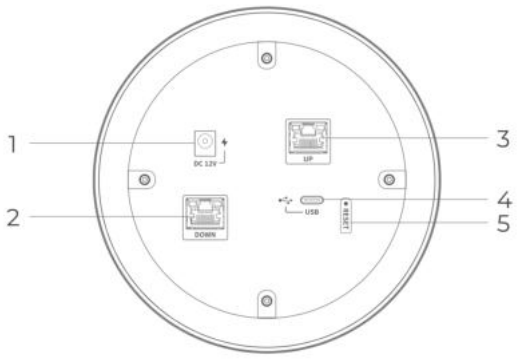

1 – DC 12V
2 – DOWN
3 – UP
4 – USB
5 – RESET

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

4K VIDEO CONFERENCING ENDPOINT

SVC-AIOEP-4K60

A 4K all-in-one endpoint, equipped with a ~12X lens and high-quality 4K CMOS sensor, supporting dual 4KP30 streaming. The best choice for enterprise/government collaboration, online health-care, online teaching/learning and conferencing.



4K 60fps | Dual Microphones | AI Sound Localization | AI Human Tracking | 12x Optical Zoom

Features

Standards Protocol (Optical)

Supports standard SIP and H.323 protocols, and is compatible with mainstream standard terminals and network-side devices in the industry.

Low Bandwidth, High Definition

Supports the latest H.264 HP H.265 encoding standard, which can save about 50% bandwidth compared to the previous generation compression standard.

Multiple Microphone Access Methods

Supports three audio input solutions: digital microphone, USB microphone, and analog microphone, adapting to different conference scenarios and meeting more audio needs.

Ultra-High Network Security

Supports H.460 firewall traversal technology to solve secure connections between public and private networks. Supports encryption algorithms such as H.235, SRTP protocol and AES-128 to ensure communication security in all aspects.

4K Full HD

Supports 4KP60 ultra-high definition, supports 2 built-in cameras and 1 HDMI high-definition video input, and 2 (HDMI) high-definition video outputs.

Full Open API

Fully open API supports the development of third-party applications, making it easy for customers to develop secondary applications to meet customization needs.

Remote, Local Recording And Broadcasting

Supports remote recording and broadcasting function, only one PC is needed to realize the conference recording and broadcasting function. Supports USB storage disk recording, plug and play, meeting records are safe and confidential.

Support Bilingual Audio Simultaneous Interpretation

Supports simultaneous simultaneous interpretation of bilingual sounds. The terminal not only supports simultaneous input of sounds in two different languages, and simultaneous output of sounds in two different languages, but also supports flexible mixing and encoding of sounds in two languages.

Super Anti-Packet Loss Capability, Effectively Solves The Problems Of Network Jitter And Packet Loss

In the case of severe network packet loss, FEC proprietary technology can be turned on. Packet loss within 20% will have no impact on the system, and meetings with 30% packet loss can still proceed normally.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-AIOEP-4K60
System Components	
Component content	• HD codec x 1 • Digital microphone (pickup distance: >=5m) x 1 • Infrared remote control x 1 • Power Adapter x 1 • AC power cable x 1 • HDMI cable (1.5m) x 2 • User manual x 1
Standards & Protocols (optical)	
multimedia framework protocol	ITU-T H.323, IETF SIP
Video codec protocol	H.261, H.263, H.263+, H.263++, H.264, H.264 High Profile, H.265
audio codec protocol	G.711, G.722, G.722.1*, G.722.1C*, AAC-LD, G.726, SILK
dual stream protocol	ITU-T H.239, BFCP
Other communication protocols	H.221, H.224, H.225, H.235, H.241, H.245, H.281, H.350, H.460, T.140, DTMF
network transport protocol	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833, RFC4585(RTP/AVPF), SNTP, ARP
Video characteristics	
Active image resolution	• 4KP60, Minimum bandwidth 4096Kpbs 1080p, Minimum bandwidth 512Kpbs
Data content resolution	• **Input:** VGA (640x480), SVGA (800x600), XGA(1024x768), WXGA(1280x768), WXGA (1280x800), 1280x960, SXGA(1280x1024), 1360x768, 1366x768, 1440x900, 1600x900, 720p(1280x720), 1080p(1920x1080), 3840x2160 • **Codec:** 800x600, 1024x768, 1280x1024, 1280x720, 1920x1080, 3840x2160 • **Output:** 800x600, 1024x768, 1280x1024, 1280x720, 1920x1080, 3840x2160
Dual flow of activities	4KP60+4KP30
Other image properties	Support PIP, POP and other display modes
Audio characteristics	
Audio characteristics	• automatic echo cancellation (AEC) • automatic gain control (AGC) • automatic noise suppression (ANS) • Supports lip sync
bandwidth	
IP	64kbps ~ 8Mbps
I/O	
Audio input interface	1 x 3.5mm linear input, 1 x RJ45 Digital microphone input, 1x USB, 1x HDMI
Audio output interface	1 x 3.5mm linear output2 x HDMI Audio output, 1xUSB
Built-in camera	851W pixels 12Xoptical zoom camera, 500Wpixels panoramic camera
Video input interface	1 x HDMI 1 x USB
Video output interface	2 x HDMI
USB interface	1x USB3.0 (Support USB flash drive, USB microphone, etc.)
Network interface	2 x RJ45: 10/1000 Base-T, Touch/DMIC port 1 x wireless: 802.11 b/g/n Wi-Fi (optical) 1x SIM 5G port(optical)
General Features	
Size	• Size: 223 x 154 x 165mm • Net weight: 2.0KG
Electrical characteristics	• Operating Voltage: DC 12V • Max power consumption: 54W
Environmental requirements	• Temperature: 0°C ~ 40°C (working status), -40°C ~ 60°C (non-working status) • Relative humidity: 10% ~ 80% (working status), 0% ~ 95% (non-working status) • Ambient noise: <46dBA SPL
Certifications and standards	China Telecom accesses the network, CCC, CE, RoHS, FCC

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

SIP / H.323 4K INTEGRATED VIDEO CONFERENCING ENDPOINT

SVC-AIOEP-4K30 / SVC-AIOEP-HD30

4K all-in-one endpoint, equipped with~12X lens and high quality 4K CMOS sensor, support dual 4KP30 streaming, best choice for enterprise/government collaboration, online health-care, online teaching/learning and conferencing.



4K UHD | Video 4 in 2 out | Audio 5 in 4 out | Built-in MCU | 12× Optical Zoom

Features

4K Ultra High Definition

The video conferencing terminal employs an 8.42 million pixel CMOS sensor, supports 12x optical zoom, and delivers 4K@30fps ultra-high resolution images with clear and natural quality over a 1Mbps bandwidth.

Built-in MCU

Equipped with an integrated MCU (Multipoint Control Unit), supporting 1+8 networking, fulfilling the needs for simple networking and swift conferencing for small and medium-sized businesses, enhancing communication and collaboration efficiency in small-scale meetings.

Superior Packet Loss Resistance

Features FEC proprietary technology to address severe network packet loss, with up to 20% packet loss having no impact on the system and maintaining normal conference operation at 30% packet loss, effectively solving network jitter and packet loss issues.

Infrared Passthrough

The terminal supports serial port infrared signal reception, allowing remote control signal reception through specific camera models, enabling hidden conference terminal setups while maintaining full control.

Bilingual Audio Simultaneous Transmission

Supports simultaneous input and output of two different languages, allowing for flexible mixing and encoding of dual-language audio.

Remote & Local Recording

Offers remote recording capabilities with just a PC for conference recording. Supports USB flash drive recording for plug-and-play operation, ensuring secure and confidential meeting records.

BYOM

Enables laptops to wirelessly use the terminal's connected AV devices-cameras, microphones, and speakers-for cloud meetings. Supports wireless screen sharing and seamless switching between BYOM and terminal conferencing.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications **SVC-AIOEP-4K30 / SVC-AIOEP-HD30**

Difference	SVC-AIOEP-4K30	SVC-AIOEP-HD30
Product Name	4K Integrated Video Conferencing Endpoint	HD Integrated Video Conferencing Endpoint
Active Image Resolution	4KP30, minimum bandwidth 2048 Kbps 1080p, minimum bandwidth 512 Kbps	1080p, minimum bandwidth 512 Kbps 720p, minimum bandwidth 384 Kbps
Data Content Resolution	**Input:** VGA (640x480), SVGA (800x600), XGA(1024x768), WXGA(1280x768), WXGA (1280x800), 1280x960, SXGA(1280x1024), 1360x768, 1366x768, 1440x900, 1600x900, 720p(1280x720), 1080p(1920x1080), 3840x2160 **Codec:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080, 3840×2160 **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080, 3840×2160	**Input:** VGA (640×480), SVGA (800×600), XGA(1024×768), WXGA(1280×768), WXGA (1280×800), 1280×960, SXGA(1280×1024), 1360×768, 1366×768, 1440×900, 1600×900, 720p(1280×720), 1080p(1920×1080) **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080
Active Dual Stream	4KP30+4KP30	1080P60+1080P60
Other Image Feature	Support PIP, POP and other display modes	
Others	OLED display IP and registration number, AI tracking AI noise reduction, voice to text, wireless casting, 4K dual-screen heterodyne display	AI noise reduction, voice to text, wireless casting, dual-screen heterodyne display
Standard & Protocol		
Multimedia Framework Protocol	ITU-T H.323, IETF SIP	
Video Codec Protocol	H.261, H.263, H.263+, H.263++, H.264, H.264 High Profile, H.265	
Audio Codec Protocol	G.711, G.722, G.722.1*, G.722.1C*, AAC-LD, G.726, SILK	
Double Stream Protocol	ITU-T H.239, BFCP	
Other Communication Protocols	H.221, H.224, H.225, H.235, H.241, H.245, H.281, H.350, H.460, T.140, DTMF	
Network Transmission Protocols	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833, RFC4585(RTP/AVPF), SNTP, ARP	
Audio Features		
Audio Feature	Acoustic Echo Cancellation (AEC) Automatic Gain Control (AGC) Automatic Noise Suppression (ANS) Lip-Sync Supported	
Camera Spec		
Built-in Camara	4K@30fps; Sensor: 8.42 MP, 1/2.5-inch, CMOS Horizontal FOV: 70°, Lens: 12x Optical Zoom; PTZ: Horizontal +/-170°, Vertical -30° ~ +30;	
Input/Output Interface		
Audio Input Interface	1 × Microphone Input (Mini XLR Interface) with Phantom Power Support 1 × 3.5mm Line Input 1 × USB 3.0 1 × HDMI with Embedded Audio Input 1 × DMIC	
Audio Output Interface	1 × 3.5mm output 2 × HDMI Audio output, 1 × USB	
Video Input Interface	1 × 12x Optical Zoom 4K PTZ Camera 1 × HDMI, 1 × USB 1 × VIDEO(POE TOUCH)	
Video Output Interface	2 × HDMI	

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-AIOEP-4K30 / SVC-AIOEP-HD30
USB Interface	3 × USB 3.0 (USB flash disk supported, USB Microphone etc)
Network Interface	2 × RJ45: 10/100/1000 Base-T, Touch/DMIC Interface 1 × Wireless: 802.11 b/g/n Wi-Fi (Optional)
Bandwidth	
IP	64kbps ~ 8Mbps
Generic Spec	
Dimension (W x D x H)	Device dimensions (excluding protruding parts): 258 x 146 x 170mm
Weight	Net weight: 2.0 Kg
Power Supply	Operating voltage: DC 12V/4.5A Max. power consumption: 54W
Certification and Standards	China Telecom Network Access, CQC, CE, RoHS, FCC

Interface Diagram

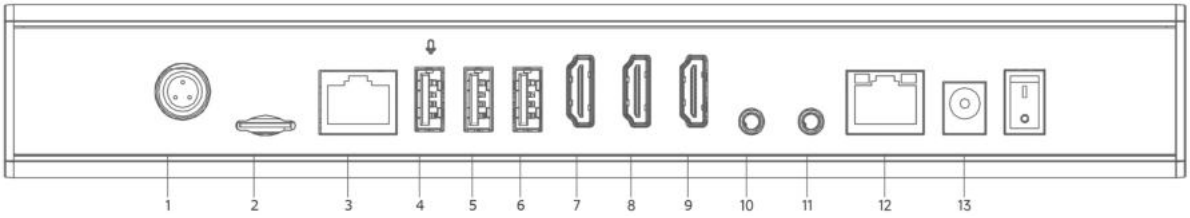

1 – Mini XLR
2 – TF
3 – RJ45
4 – USB
5 – USB
6 – USB
7 – HDMI OUT 2.1
8 – HDMI OUT 2.1
9 – HDMI IN
10 – LINE IN
11 – LINE OUT
12 – NET
13 – DC 12V

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

VIDEO CONFERENCING ENDPOINT

SVC-AIOEP-4K30-VB

The terminal is designed for scenarios such as corporate business meetings, distance learning, and telemedicine. It integrates an ultra-high-definition camera, microphone, speaker, and conference terminal. Only two lines are required to build a video conferencing environment and achieve high-quality remote collaboration and communication.



Four in One | Superstrong CPU | Video 4 in 2 out | Audio 5 in 5 out | AI Algorithms

Features

All-In-One Integration

An all-in-one design featuring an ultra-high-definition camera, array microphone, full-range speaker, and Android conference terminal, effectively reducing the complexity of wiring and installation.

4K Ultra High Definition

The video conferencing terminal employs an 8.51 million pixel CMOS sensor, supports 12x optical zoom, and delivers 4K@30fps ultra-high resolution images with clear and natural quality over a 1Mbps bandwidth.

Super Computing Power

Support the standard SIP and H.323 protocol, compatible with the industry mainstream standard terminal and the network side device.

AI Algorithm

Built-in AI automatic framing algorithm can recognize the position of the participants and automatically adjust the lens angle to get the best view; at the same time, built-in AI sound tracking algorithm can quickly lock the speakers according to the sound positioning and focus on the close-ups.

Dual-screen Display

Supporting two HD video outputs, it can be connected to two largescreen display devices at the same time, which can not only display the conference screen but also share pictures, videos and documents, enhancing the conference experience.

BYOM

Enables laptops to wirelessly use the terminal's connected AV devices - cameras, microphones, and speakers - for cloud meetings. Supports wireless screen sharing and seamless switching between BYOM and terminal conferencing.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-AIOEP-4K30-VB
Standard & Protocol	
Multimedia Framework protocol	ITU-T H.323, IETF SIP
Video Codec and Protocol	H.261, H.263, H.263+, H.263++, H.264, H.264 High Profile, H.264 SVC, H.265
Audio Codec and Protocol	G.711, G.722, G.722.1*, G.722.1C*, AAC-LD, G.726, SILK
Double Stream Protocol	ITU-T H.239, IETF BFCP
Other Communication Protocols	H.221, H.224, H.225, H.235, H.241, H.245, H.281, H.350, H.460, T.140, DTMF
Network Transmission Protocols	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833, RFC4585(RTP/AVPF), SNTP, ARP
Camera Spec	
Built-in Camara	• Sensor: 1/2.5-inch CMOS, 8.51 MP effective pixels • Field of view: DFOV: 121°, HFOV: 110°, 5× digital zoom • Mechanical Gimbal: Support • Angle of rotation: horizontal/tilt ± 15° • Backlight compensation: support • Digital noise reduction: 2D&3D digital noise reduction
AI function (optional)	Group Framing; Speaker Tracking
Video Spec	
Active Image Resolution	Minimum 1Mbps for 4K at 30fps, dual 4K at 30fpson main and auxiliary streams with minimum 2Mbps. Minimum 512Kbps for 1080p at 60fps; 4K at 60fps supported on minimum 2Mbps
Content Video Resolution	**Input:** VGA (640×480), SVGA (800×600), XGA(1024×768), WXGA(1280×768), WXGA (1280×800), 1280×960, SXGA(1280×1024), 1360×768, 1366×768, 1440×900, 1600×900, 720p(1280×720), 1080p(1920×1080) codec: 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080 **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080
Active Double Stream	Dual 4K resolution at 30 frames per second
Other Image Features	Support PIP, POP and other display modes, Dual screen different display
Bandwidth	
IP	64kbps ~ 8Mbps
Audio Spec	
Audio Features	Acoustic Echo Cancellation (AEC) Automatic Gain Control (AGC) Automatic Noise Suppression (ANS) Lip-Sync Supported
Microphone	Built-in 4 array microphones, pickup distance 6 meters
Speaker	Built-in Full-range speaker, 8W RMS, SPL 96dB@0.5m)
Input/Output Interface	
Audio Input Interface (5 Input)	1 × Built-in microphone 1 × DMIC 1 × USB 1 × HDMI embedded audio input 1 × 3.5mm linear input
Audio Output Interface (5 output)	1 × Integrated speaker 1 × USB 2 × HDMI embedded audio output 1 × 3.5mm linear output
Video Input Interface (4 input)	1 × Built-in 4K camera 1 × HDMI input, supports HDMI 2.0, maximum resolution 4K30fps 1 × USB 1 × BYOM (WIFI/LAN), maximum resolution 4K30fps 1 x Video(PoE Touch)
Video Output Interface (2 output)	2 × HDMI OUT output, support HDMI 2.1, maximum resolution 4K60fps
USB Interface	1 × USB 3.0 Type-A Host 1 × USB 3.0 Type-A OTG 1 × USB 3.0 Type-C (for connecting to a PC for use as a camcorder and speakerphone)
Power Interface	1×DC 12V/3A
Network Interface	1×RJ45, 10M/100M/1000M Base-T 1×RJ45, 10M/100M Base-T, Support 15W PSE
Wireless Connection	1×WiFi (2.4G&5.8G), 802.11a/b/g/n/ac(Optional)

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-AIOEP-4K30-VB
Generic Spec	
Dimension (W x D x H)	601 × 141mm × 115mm
Power Supply	Input Voltage: DC 12V Power Consumption: 36W
Environmental Requirements	Temperature: 0° C ~ 40° C (operating state), -40° C ~ 70° C (non-operating state) Humidity: 10% ~ 80% (operating), 0% ~ 95% (non-operating)
Certification and Standards	CQC, RoHS, CE Optional

Interface Diagram

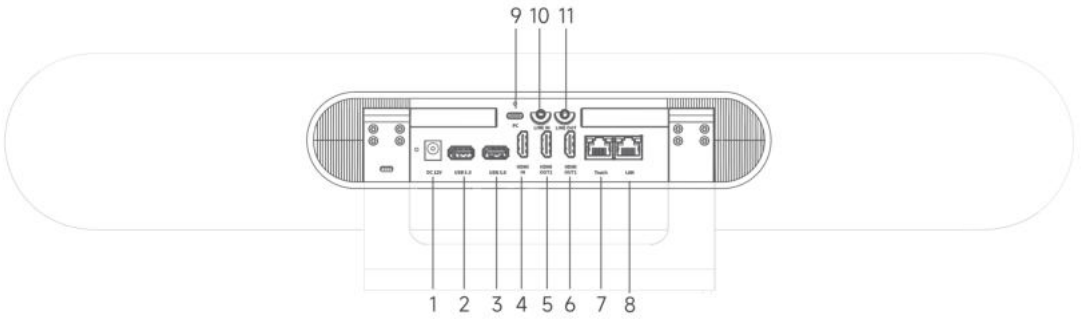

1 – DC 12V
2 – USB3.0
3 – USB3.0
4 – HDMI IN
5 – HDMI OUT1
6 – HDMI OUT2
7 – Touch
8 – LAN
9 – Type-C
10 – LINE IN
11 – LINE OUT

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

MULTIPOINT CONTROL UNIT (MCU) · UP TO 128-WAY

SVC-MCUServer

Designed specifically for various meeting scenarios such as government and enterprise conferences, emergency command, telemedicine, and remote education. Powered by the latest-generation processor, it ensures smooth and stable operation of the video conferencing system. With a wealth of audio and video input and output interfaces, it can meet the needs of more meeting scenarios. License options: SVC-MCULIC-8/16/24/32/48/64/128.



128-way Conference Capacity | SIP | H.323 | Reconnect | Firewalls

Features

Complete Video Conferencing Solution
Provides complete point-to-point and multipoint conferencing capabilities including gateway functionality, GK call control, and effective network resource management.

Rich Audio and Video Processing
Supports audio and video encoding conversion. Each user can enjoy all the benefits of advanced video processing including multi-split mode, rate matching, and text overlay.

Excellent Bandwidth Control
Uses an optimized H.264 video compression algorithm so that with less than 1Mbps bandwidth, video clarity can achieve high-definition results.

Provide End-To-End Connections
Has been through the market test of mature programs with perfect connectivity, and can support H.323, SIP and other different networks to connect the conference.

Flexible Meeting Set Up and Management
Provides conference templates directly to the meeting, supporting presentation mode, discussion mode, and other conference modes.

Super Mixed Protocol, Resolution & Rate
Supports terminals in the same meeting group using different video compression coding protocols, different video resolutions, and different rates.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-MCUServer
Agreement & Standard	
Multimedia Agreement	ITU-T H.323, IETF SIP
Video Codec Protocol	H.261, H.263, H.264, H.264 High Profile, H.265
Audio Codec Protocol	G.711A, G.711U, G.728, G.723.1, G.722.1*, G.722.1C*, AAC_LD
Dual-stream protocol	ITU-T H.239, BFCP
Video Codec Format	QCIF, CIF, 4CIF, VGA, XGA, 720P(1280x720), 1080i(1920x1080), 1080P(1920x1080), 4K(3840x2160)
Remote Camera Control	H.281, H.224
Meeting Ability	
Maximum Video Capacity (1080p)	8/16/24/32/48/64/128 1080p HD conference 8/16/24/32/48/64/128 4Kp HD Conference
Maximum Voice Communication	128
Maximum Number Of Meeting Groups	36
1080p/4k 60 Frames	Support
High Standard Mixed Meeting	Support
H.323 Terminal and Sip Terminal Mix	Support
Audio and Video Conference Mix	Support
Different Rate Terminals are Mixed	Support
Different Audio Protocols are Mixed	Support
Meeting Mode	
Preset Layout	Discussion Mode, Speaker Mode
Mixed protocol mixed resolution and speed control conference	Support
The Main Venue Of The Round Tour Function	Support
Voice Excitation	Support
Automatic Disconnection Reinvited	Support
Screen Multi-Screen Display	
Multi-Screen Settings	1, 2, 3, 4, 5 + 1, 9, 8 + 2, 12 + 1, 14 + 1, 16
Multi-Split Mode	Manual selection
A Variety Of Dynamic Split Screen Switching Mode	Support
H.263 And H.264 Multi-split Mode	Support
Voice Conference Access	
H.323 Voice Terminal To Join The Meeting	Support
SIP IP PhoneJoins the Conference	Support
Stable Safety	
Network Adaptability	Supports Diffserv TOS And IP Priority QoS Functions
NAT / Firewall Traversal	Provide New Solutions Through Firewall And NAT Support NAT Dynamic Traversal No Need To Set
MTBF (Hours)	More Than 120000 Hours

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-MCUServer
Bandwidth	
IP	128kbps ~ 16Mbps
Interface	
Control Interface	1 × DB9
Multi-Split Mode	2 × USB 2.0
A Variety Of Dynamic Split Screen Switching Mode	1 × VGA
H.263 And H.264 Multi-split Mode	2 × RJ45: 10/100/1000M Base-T
Business Characteristics	
Language	Chinese simplified, English
Special Feature	• Built-in GK registration management support up to 200 simultaneous registration (optional) • venue name dynamic English subtitles • Remote control • WEB control for remote management and maintenance • Built-in HD soft terminal (optional) • Conference Multicast (optional)
Business Characteristics	
Remote Upgrade	Support
System Log	Support
Physical Characteristics	
Dimensions (W x D x H)	430 × 340 × 55mm
Weight	Net Weight : 5Kg
Electrical Characteristics	Operating Voltage : AC 100V ~ 240V Operating Frequency : 50Hz / 60Hz Maximum Power Consumption : TBD
Environmental Requirements	Operating temperature: 0° C to 50° C Operating humidity: 5% to 90% (non-condensing) Storage temperature: -20° C to 70° C Storage humidity: 5% to 90% (non-condensing)
Certification And Standards	China Telecom network,CCC, CE, RoHS, FCC

Interface Diagram

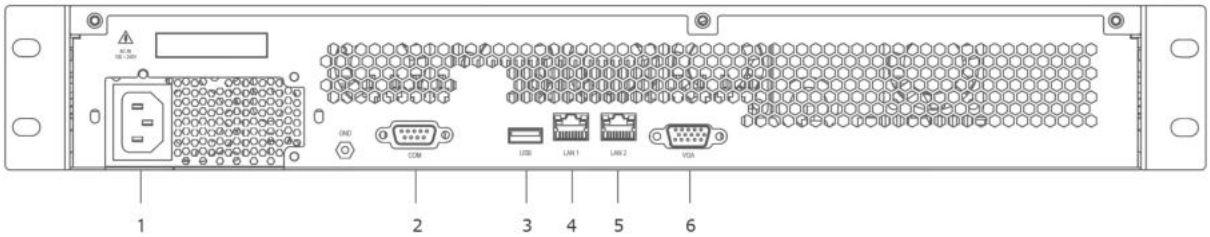

1 – Power
2 – RS232
3 – USB
4 – LAN
5 – LAN
6 – VGA

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

HD RECORDING & STREAMING SERVER · UP TO 10× 4K

SVC-RECOR

The SVC-RECOR is a new-generation HD recording and streaming server supporting multiple concurrent meetings, multiple rates, and multiple recording modes for recording and on-demand playback of conferences at will. With strong compatibility, it works with all current standard H.323 / SIP MCUs and terminal products, and is suited to telecom, government, public-safety, enterprise, education, healthcare and other industry sectors.



Unified Conference (H.323/SIP) | Dual-stream Recording | Multi-conference Recording & Broadcasting | Local Storage

Features

H.323 / SIP Converged Conferencing
Supports H.323 and SIP protocols and works with all current standard H.323 / SIP MCUs and terminal products, delivering excellent compatibility across networks.

Dual-Stream Recording, Live Playback
Live playback is supported during recording. Multiple channels can be recorded simultaneously, and each channel supports on-demand and group broadcast with dual-stream recording.

Local Storage, Secure Backup
Recording and streaming are managed through a web browser interface, letting users see recording results immediately; recorded content can be exported and transferred for easy backup.

Compact Size, Stable Performance
Standard 1U 19-inch chassis for easy installation and convenient network integration; powerful performance meets 7×24 continuous operation needs, with MTBF greater than 120,000 hours.

Multi-Rate, Multi-Mode Recording
Supports multiple meetings at multiple rates with a variety of recording modes, enabling flexible recording and on-demand point-to-point playback of any conference.

Flexible User Permissions
Recorded content is classified and managed centrally, and different permissions can be assigned to different users to control the content each user is able to view.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-RECOR
Protocols & Standards	
Management Protocol	H.323, SIP, H.225, H.245, H.239, HTTP, RTP, RTSP, RTMP
Video Protocol	H.261, H.263, H.264, H.264 High Profile, H.265 (MPEG4 optional)
Audio Protocol	G.711A, G.711U, G.728, G.723.1, G.729, G.722, G.722.1, OPUS, etc.
Video Format	QCIF, CIF, 4CIF, VGA, SVGA, XGA, 720P, 1080P, 4K
Recording Bandwidth	128Kbps ~ 12Mbps
Video Frame Rate	1 ~ 60 fps
Recording & Streaming	
Recording Capacity	Standard 5 groups of 4K meeting recording; licensable up to 10 concurrent groups of 4K meeting recording
Live Streaming	Standard 100 live channels; licensable up to 300 concurrent users (unlimited on-demand)
Storage Capacity	4TB standard (approx. 450MB/hour at 1Mbps); 6TB / 8TB / 16TB optional
Output Format	MP4
Playback Tools	VLC, FLASH Player, RealPlayer, QuickTime, etc.
Management & Security	
Management	Web-based management (Chinese / English interface supported)
Content Management	Classified management of recorded content
User Permissions	Per-user permission settings to control viewable content
Security	AES, TLS encryption
Compatibility	Compatible with all H.323 / SIP standard MCUs and terminals
Interface	
Network Interface	2 × RJ45: 10/100/1000M Base-T
Electrical & Physical	
Power Supply	100 ~ 240V AC, 50/60Hz, 250W
Dimensions (W×D×H)	460mm × 430mm × 45mm
Operating Environment	Temperature 10 ~ 50°C, Humidity 15% ~ 85%
Reliability	
MTBF	More than 120,000 hours; 7×24 continuous operation

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

SIP / H.323 4K DETACHABLE VIDEO CONFERENCING ENDPOINT

SVC-CODEC-D4K20 / SVC-CODEC-DHD20

This endpoint is a new 4K Detachable Video Conferencing Endpoint, designed specifically for government and enterprise meetings, emergency command, telemedicine, and remote education scenarios. Powered by a next-generation processor, it delivers robust performance to ensure smooth and stable operation of video conferencing systems. It features 4 video inputs and 2 outputs, as well as 6 audio inputs and 4 outputs, accommodating a wide range of device connectivity needs while supporting secure and reliable remote meetings.



4K UHD | Video 4 in 2 out | Audio 6 in 4 out | Built-in MCU | Infrared Passthrough

Features

4K Dual Stream

Features exceptional dual-stream collaboration, supporting dual 4kP30+4KP30 video stream output for detailed image quality and an excellent immersive meeting experience.

Built-in MCU

Features an integrated Multi-Point Control Unit (MCU) to meet the simple networking and rapid meeting needs of small and medium-sized businesses, enhancing communication and collaboration efficiency in small meetings.

Superior Packet Loss Resistance

Features FEC proprietary technology to address severe network packet loss, with up to 20% packet loss having no impact on the system and maintaining normal conference operation at 30% packet loss, effectively solving network jitter and packet loss issues.

Infrared Passthrough

The terminal supports serial port infrared signal reception, allowing remote control signal reception through specific camera models, enabling hidden conference terminal setups while maintaining full control.

Bilingual Audio Simultaneous Transmission

Supports simultaneous input and output of two different languages, allowing for flexible mixing and encoding of dual-language audio.

Remote & Local Recording

Offers remote recording capabilities with just a PC for conference recording. Supports USB flash drive recording for plug-and-play operation, ensuring secure and confidential meeting records.

BYOM

Enables laptops to wirelessly use the terminal's connected AV devices-cameras, microphones, and speakers-for cloud meetings. Supports wireless screen sharing and seamless switching between BYOM and terminal conferencing.

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications **SVC-CODEC-D4K2O / SVC-CODEC-DHD2O**

Difference	SVC-CODEC-D4K2O	SVC-CODEC-DHD2O
Product Name	4K Detachable Video Conferencing Endpoint	HD Detachable Video Conferencing Endpoint
Active Image Resolution	4KP30, minimum bandwidth 2048 Kbps 1080p, minimum bandwidth 512 Kbps	1080p, minimum bandwidth 512 Kbps 720p, minimum bandwidth 384 Kbps
Data Content Resolution	**Input:** VGA (640x480), SVGA (800x600), XGA(1024x768), WXGA(1280x768), WXGA (1280x800), 1280x960, SXGA(1280x1024), 1360x768, 1366x768, 1440x900, 1600x900, 720p(1280x720), 1080p(1920x1080), 3840x2160 **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080, 3840×2160	**Input:** VGA (640×480), SVGA (800×600), XGA(1024×768), WXGA(1280×768), WXGA (1280×800), 1280×960, SXGA(1280×1024), 1360×768, 1366×768, 1440×900, 1600×900, 720p(1280×720), 1080p(1920×1080) **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080
Active Dual Stream	4KP30+4KP30	1080P60+1080P60
Network Transmission Protocols	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833, RFC4585(RTP/AVPF), SNTP, ARP	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833
Others	OLED display IP and registration number, wireless casting, 4K dual-screen heterodyne display	OLED display IP and registration number, wireless casting, 1080P dual-screen heterodyne display
Standard & Protocol		
Multimedia Framework Protocol	ITU-T H.323, IETF SIP	
Video Codec Protocol	H.261, H.263, H.263+, H.263++, H.264, H.264 High Profile, H.265	
Audio Codec Protocol	G.711, G.722, G.722.1*, G.722.1C*, AAC-LD, G.726, SILK	
Double Stream Protocol	ITU-T H.239, BFCP	
Other Communication Protocols	H.221, H.224, H.225, H.235, H.241, H.245, H.281, H.350, H.460, T.140, DTMF	
Network Transmission Protocols	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833, RFC4585(RTP/AVPF), SNTP, ARP	
Bandwidth		
IP	64kbps ~ 8Mbps	
Audio Features		
Audio Feature	Acoustic Echo Cancellation (AEC) Automatic Gain Control (AGC) Automatic Noise Suppression (ANS) Lip-Sync Supported	
Video Features		
Other Image Feature	Support PIP, POP and other display modes	
Input/Output Interface		
Audio Input Interface	1 × 3.5mm input, 1 × XLR input, 1 x DMIC input, 1 × USB input, 2 × HDMI input	
Audio Output Interface	1 × 3.5mm output, 2 × HDMI Audio output, 1 × USB output	
Video Input Interface	2 × HDMI 1 × USB 1 × VIDEO(POE TOUCH)	
Video Output Interface	2 × HDMI(3 x HDMI Optional)	
USB Interface	2 × USB3.0 (USB flash disk supported, USB Microphone etc)	
Network Interface	2 × RJ45: 10/1000 Base-T Touch/DMIC 1 × Wireless: 802.11 b/g/n Wi-Fi (Optional)	

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	SVC-CODEC-D4K2O / SVC-CODEC-DHD2O
Generic Spec	
Dimension (W x D x H)	Device Dimension: 348 × 148 × 37mm Package Dimension: 413 × 332 × 130mm
Weight	Net weight: 1.4 Kg, Gross weight: 2.2 Kg
Power Supply	Operating voltage: DC 12V Max. power consumption: 54W
Environmental Requirements	Temperature: 0° C ~ 40° C (working condition), -40° C ~ 70° C (Non working state) Humidity: 10% ~ 80% (operating), 0% ~ 95% (non-operating)
Certification and Standards	China Telecom Network Access, CQC, CE, RoHS, FCC

Interface Diagram

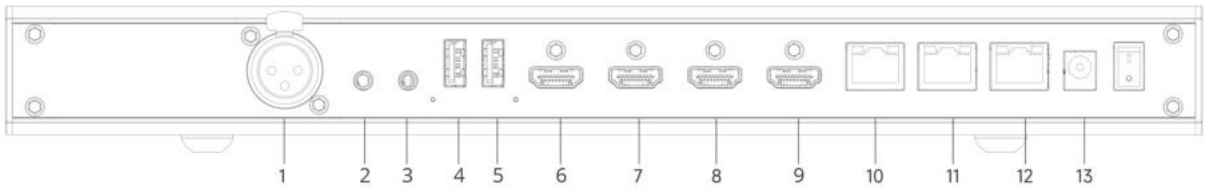

1 – MIC IN
2 – AUDIO IN
3 – AUDIO OUT
4 – USB
5 – USB
6 – HDMI OUT
7 – HDMI OUT
8 – HDMI IN
9 – HDMI IN
10 – RS232
11 – NET
12 – POE
13 – DC12V

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

SIP / H.323 4K RACK-MOUNTED VIDEO CONFERENCING ENDPOINT

SVC-CODEC-D4K30 / SVC-CODEC-DHD30

A modular ultra-HD video conferencing endpoint designed for enterprise administrative meetings, corporate conferences, emergency command, and telemedicine. It supports simultaneous 4K30 + 4K30 high-fidelity video streams, delivering a seamless and exceptional meeting experience. With four video inputs and three outputs, it offers flexible connectivity for various cameras and displays, meeting the integration and scalability needs of diverse conference rooms.



4K UHD | Video 4 in 3 out | Audio 8 in 7 out | Built-in MCU | Triple-Screen Display

Features

4K Dual Stream

Features exceptional dual-stream collaboration, supporting dual 4kP30+4KP30 video stream output for detailed image quality and an excellent immersive meeting experience.

Triple-Screen Display with Rich Content

Supports simultaneous display of local and remote participants, presentation materials, audience Q&A, and real-time polling or meeting analytics—enhancing engagement and interaction throughout the meeting.

Superior Packet Loss Resistance

Features FEC proprietary technology to address severe network packet loss, with up to 20% packet loss having no impact on the system and maintaining normal conference operation at 30% packet loss, effectively solving network jitter and packet loss issues.

Built-in MCU

Supports an optional built-in MCU (Multipoint Control Unit), enabling 1+8 endpoint HD video conferencing. Users can configure licenses internally without purchasing or setting up a separate MCU, simplifying system deployment and management.

Extensive Interfaces

Supports a wide range of interfaces including HDMI, USB, RJ45, and RS232, enabling multiple audio and video inputs and outputs. Provides flexible compatibility with various conference room devices for broader applications.

BYOM

Enables laptops to wirelessly use the terminal's connected AV devices-cameras, microphones, and speakers-for cloud meetings. Supports wireless screen sharing and seamless switching between BYOM and terminal conferencing.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications **SVC-CODEC-D4K3O / SVC-CODEC-DHD3O**

Difference	SVC-CODEC-D4K3O	SVC-CODEC-DHD3O
Product Name	4K Rack-mounted Video Conferencing Endpoint	HD Rack-mounted Video Conferencing Endpoint
Active Image Resolution	4KP30, minimum bandwidth 2048 Kbps 1080p, minimum bandwidth 512 Kbps	1080p, minimum bandwidth 512 Kbps
Data Content Resolution	**Input:** VGA (640x480), SVGA (800x600), XGA(1024x768), WXGA(1280x768), WXGA (1280x800), 1280x960, SXGA(1280x1024), 1360x768, 1366x768, 1440x900, 1600x900, 720p(1280x720), 1080p(1920x1080), 3840x2160 **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080, 3840×2160	**Input:** VGA (640×480), SVGA (800×600), XGA(1024×768), WXGA(1280×768), WXGA (1280×800), 1280×960, SXGA(1280×1024), 1360×768, 1366×768, 1440×900, 1600×900, 720p(1280×720), 1080p(1920×1080) **Output:** 800×600, 1024×768, 1280×1024, 1280×720, 1920×1080
Active Dual Stream	4KP30+4KP30	1080P60+1080P60
Other Image Feature	Support PIP, POP and other display modes	
Audio Spec		
Audio Spec	Acoustic Echo Cancellation (AEC) Automatic Gain Control (AGC) Automatic noise suppression (ANS) Lip-sync supported	
Bandwidth		
IP	64kbps ~ 10Mbps	
MCU		
Bulit-in MCU	EMCU	
Built-in Multi-point Calling Unit	1+8	
Input/Output Interface		
Audio Input Interface (8 input)	2 × XLR, 2 × RCA, 1 × DMIC, 2 × HDMI(audio input), 1 × USB	
Audio Output Interface (7 output)	4 × RCA, 2 × HDMI(audio output) 1 × USB	
Video Input Interface (4 input)	3 × HDMI, 1 × NET VIDEO	
Video Output Interface(3 output)	3 × HDMI	
USB Interface	2 × USB3.0(USB flash disk supported, USB Microphone etc)	
Network Interface	4 × RJ45: 2 × 10/1000 Base-T, Touch/DMIC, VIDEO NET 2 x RS232(Support infrared transmission) 1 x Wireless: 802.11 b/g/n Wi-Fi(optional)	
Others	OLED display IP and registration number, wireless casting, 4K dual-screen heterodyne display	
Standard & Protocol		
Multimedia Framework Protocol	ITU-T H.323, IETF SIP	
Video Codec Protocol	H.261, H.263, H.263+, H.263++, H.264, H.264 High Profile, H.265	
Audio Codec Protocol	G.711, G.722, G.722.1*, G.722.1C*, AAC-LD, G.726, SILK	
Double Stream Protocol	ITU-T H.239, BFCP	
Other Communication Protocols	H.221, H.224, H.225, H.235, H.241, H.245, H.281, H.350, H.460, T.140, DTMF	
Network Transmission Protocols	TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP, RFC3261, RFC3264, RFC2190, RFC3407, RFC2833	

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	**SVC-CODEC-D4K3O / SVC-CODEC-DHD3O**
Generic Spec	
Dimensions (W x D x H)	Terminal size: 442 × 285 × 58mm (without lug size)
Net weight	3Kg
Power Supply	Operating voltage: AC 100V ~ 240V Operating Frequency: 50Hz/60Hz Maximum power consumption: 80W
Environmental Requirements	Temperature: 0° C ~ 40° C(operating condition), -40° C ~ 70° C(non-operating condition) Relative Humidity: 10% ~ 80%(working), 0% ~ 95%(non-working)
Certification and Standards	China Telecom Network Access, CQC, CE, RoHS, FCC

Interface Diagram

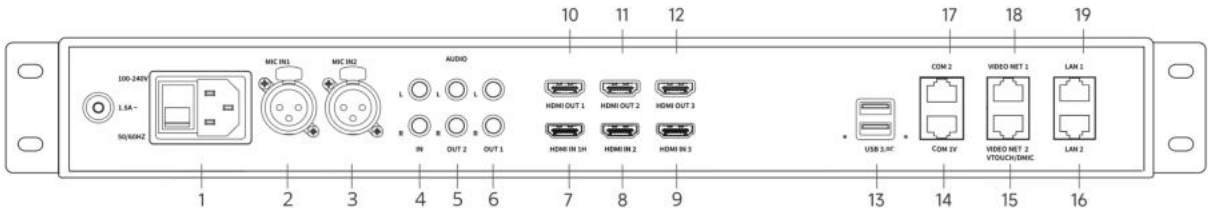

1 – Power
2 – MIC IN
3 – MIC OUT
4 – AUDIO IN
5 – AUDIO OUT
6 – AUDIO OUT
7 – HDMI IN
8 – HDMI IN
9 – HDMI IN
10 – HDMI OUT
11 – HDMI OUT
12 – HDMI OUT
13 – USB3.0
14 – COM
15 – VIDEO NET 2 VTOUCH/DMIC
16 – LAN 2
17 – COM
18 – VIDEO NET 1
19 – LAN 1

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

10.1-INCH ANDROID TOUCH CONTROL PANEL · ROOM SCHEDULING

VCS-TOUCTRL-1

This 10.1-inch panel is a schedule panel designed specifically for enterprise conference room management. It displays real-time information about room usage and meeting details through screens and LED strips, enhancing conference room utilization efficiency.



10.1-inch Touch Screen | Android System | Open API | Flexible Installation | PoE

Features

Full HD Touchscreen

Experience a crystal-clear display and smooth operation with the 10.1-inch IPS Full HD touchscreen powered by a hexa-core processor.

Meeting Status Indication

The dual-sided tricolor LED strips allow real-time synchronization to display the status of conference rooms as available, reserved, or occupied. With those indications, users can quickly confirm room status from a distance.

One-Click Meeting Control

Pre-installed with popular meeting applications like Zoom, this feature allows you to initiate, join, manage, and conclude meetings, as well as share your screen, all with just one click, simplifying your video conference management.

Remote Power Supply and Management

The device supports PoE and network connectivity, simplifying the wiring.

High Compatibility

Users can choose from pre-installed apps such as Zoom Rooms Check-in Board and Zoom Rooms Controller. These apps integrate seamlessly with video meeting management platforms, boosting meeting efficiency.

Diverse Installation Options

This control panel features standard VESA positions for walls, glass, doors, window frames, with a back panel for cable management, supporting horizontal, vertical, and desktop mounting.

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	VCS-TOUCTRL-1
Display	
Screen	10.1-inch, IPS
Screen Type	IPS Multi-touch Display
Resolution	1920 × 1200
Display Luminance	300 cd/m² (typ.)
Display Ratio	16:10
Viewing Angle	170°
Hardware	
OS	Android 9.0
CPU	hexa-core, 4 × Cortex A73 + 2 × Coretex A53
Memory	4GB
Storage	16GB
Image Processor	ARM G52 MP4
Speaker	1 × 1.2W
Microphone	Built-in, Pickup distance 2m
Status Light Strip	Built-in Dual-Side Indicator Light Strip
Input/Output Interface	
USB	1 × USB2.0 Type-C (Supports power supply and data transmission)
RJ45	1 × RJ45 (PoE)
Software	
Pre-installed Software (choose one)	Tencent Conference Rooms Controller APP Lark Rooms Controller APP Zoom Rooms Controller APP Dingtalk Rooms Controller APP
Network	
WIFI	IEEE802.11a/b/g/n/ac, WPA, WPA2
Ethernet	10/100 MBaseT
PoE	Support
Bluetooth	BT 5.0
General Specifications	
Input Voltage	DC 5V / PoE (802.3af)
Input Current	3.0A
Operating Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Working Humidity	10% ~ 80%
Storage Humidity	0% ~ 95%
Power Consumption	12W
MTBF	>30000Hours
Dimensions (W x D x H)	242 × 162 × 29mm
Net Weight	800g
Certification	CQC, RoHS


For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Interface Diagram

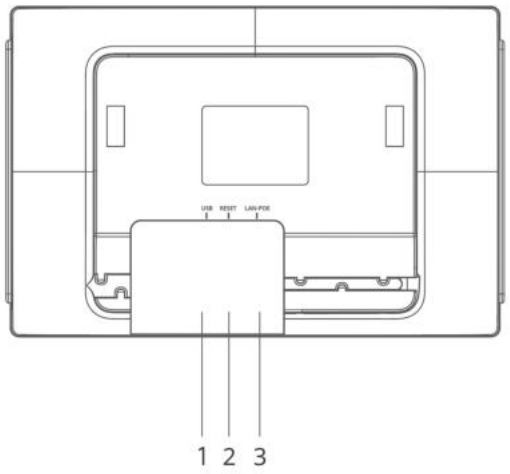

1 – USB

2 – RESET

3 – LAN-PoE

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

CAMERA CONTROL KEYBOARD

VCS-TOUCTRL-2

Designed for broadcasting, enterprise conferences, smart education, and telemedicine. With a high-performance processor and 7-inch HD touchscreen, it offers real-time 4-channel video preview and precise 1-to-1 control, along with unified management of 254 devices, AI visual control, and real-time Tally feedback—simplifying operations and ensuring efficient, precise, and reliable production.



7" Touchscreen | 4D Joystick | AI Control Knob | 4-way HD Preview | HDMI 4K Output | PoE+ Power Supply

Features

HD Touchscreen with Visual Operation

Equipped with a 7-inch high-definition touchscreen, supporting one main view plus three sub-views displayed simultaneously. This enables easy multi-camera coordination, ensuring no key moment is missed. Ideal for live broadcast, conferences, or event scheduling with clear visual control.

Unified Control of up to 254 Devices

Capable of managing up to 254 cameras simultaneously, with group and category storage management. Enables unified scheduling and collaborative shooting across multiple scenes, saving setup time and labor costs.

AI Function – Intuitive Visual Control

Features an innovative visualized AI control knob. Without complex menu navigation, users can quickly activate AI functions such as participant framing and speaker tracking. The interface is intuitive and efficient, even for beginners.

Trajectory Recording & Accurate Playback

Built-in motion path recording and playback allows recording of complex camera movements and one-click reproduction. Reduces repetitive setup time, standardizes operations, and improves workflow efficiency.

Integrated Tally Light with Real-Time Status Feedback

The built-in Tally light protocol provides real-time feedback of camera status (live, standby, or switching) on the keyboard with color indicators, preventing mis-switching or on-air mistakes for smooth operation.

Multi-Protocol Compatibility & Flexible Installation

Supports mainstream control protocols such as NDI® (optional), VISCA, VISCA-IP, Pelco P&D, and ONVIF. Compatible with most PTZ cameras on the market, enabling efficient cross-platform integration.

Comprehensive Interfaces for All Scenarios

Equipped with LAN, RS422/485, USB-C, HDMI 2.0, RS232, and Tally (DB26) ports, allowing easy connection to switchers, recorders, monitors, and peripherals. Supports the full chain of signal transmission, data exchange, and status feedback. PoE+ power supply simplifies deployment.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	VCS-TOUCTRL-2
Control Interface	
Display	7-inch touchscreen, 1024×600p
AI Control Knob	Quick access to AI functions with visual feedback
Control Knobs	Quick control of iris, shutter, gain, AE, and WB
4D Joystick	Pan / Tilt / Zoom / Confirm
Camera Groups	16 groups (16 per group)
Max Cameras	Up to 254 cameras
Presets	Up to 255 presets
Interface & Protocols	
Interfaces	Network (RJ45/PoE+), RS485/RS422, USB-C, HDMI 2.0
IP Protocols	ONVIF, VISCA-IP, NDI®, HX3
Serial Protocols	PELCO-D, PELCO-P, VISCA
Baud Rate	2400–115200 bps
LAN Standard	1 × 1000M (PoE/PoE+)
General Specifications	
Power Supply	DC 12V-2A 10%, 5.5/2.1 connector
Power Consumption	<15W
Operating Temperature	-10° C ~ 50° C / 14° F ~ 122° F
Storage Temperature	-40° C ~ 60° C / -40° F ~ 140° F

Interface Diagram

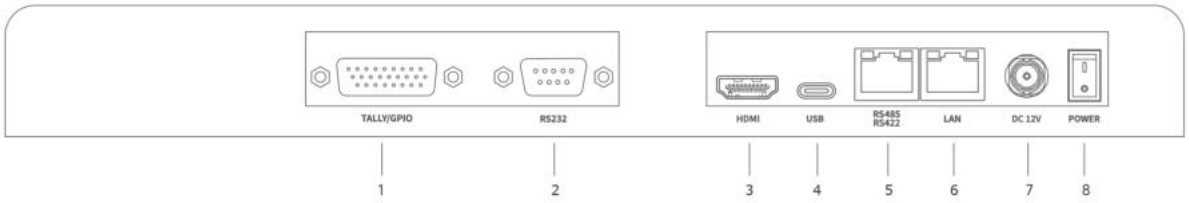

1 – TALLY/GPIO
2 – RS232
3 – HDMI
4 – USB
5 – RS485/RS422
6 – LAN
7 – DC12V
8 – POWER

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

SMART CONFERENCING SPEAKERPHONE

SVC-MICSPEK-360-EX

Wireless Smart Conference Microphone & Speaker designed for high-end enterprise meetings, featuring world-class AI audio algorithms that effectively eliminate echo, background noise, and voice reverberation, delivering balanced and clear sound for an exceptional voice communication experience. Supports wireless connection to the conference hub for true plug-and-play operation, and USB connectivity to expand with up to two satellite microphones, flexibly extending the pickup range.



360° Pickup | 10m Pickup Range | AI-Assisted Noise Reduction | Intelligent Dual-speaker | Hi-Fi

Features

Plug and Play + High Compatibility

A USB dongle connects to the conference host for instant use without pairing. It employs 2.4GHz full-duplex wireless communication between the main microphone and host, integrating frequency-hopping algorithms and signal synchronization to ensure stable real-time transmission of bidirectional audio signals.

Long Range Omnidirectional Pickup

The main microphone features four high SNR digital microphone arrays for 360-degree omnidirectional sound pickup. Its pickup range is 3 meters and can be expanded with two extension microphones, extending it to 10m.

AI-Assisted Audio Algorithm

The microphone uses AI technology for noise reduction, echo cancellation, and reverberation suppression, ensuring clear sound quality during remote meetings and mimicking face-to-face conversations.

Consistent Volume

With an automatic gain control algorithm, the speakerphone adjusts volume levels based on the speaker's voice, ensuring stable and consistent pickup without volume fluctuations that could impact communication efficiency.

Ultra-High Fidelity

Featuring high and low-frequency speakers and a resonance chamber design, it delivers deep bass, rich midrange, and clear treble, reproducing lifelike human voices.

Leading Domestic Technology

Hardware localization rate exceeds 98%, with audio algorithms achieving top-three rankings globally in prestigious competitions like Interspeech, IEEE L3DAS21, and ICASSP2022 AEC Challenge.

One-Touch Conference Control

Supports conference operations directly on the microphone, such as call answer/end, volume+/-, mute, etc., making conference control more convenient.

Business Styling

Made with an aluminum alloy casing for a high-quality look and feel. Includes wire management grooves and non-slip foot pads at the bottom for stable installation, perfect for different business meeting settings.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-MICSPEK-360-EX
Conference Capability	
Coverage Area for Sound Pickup	20-100 m^2
Number of Participants	6-20 People
Microphone Specifications	
Microphone Type	High Signal-to-Noise Ratio Digital Silicon Microphone
Microphone Array	Built-in 6 (4+2) MEMS Microphones
Pickup Range	360° Omnidirectional Pickup
Pickup Distance	3m optimum pickup range, 10m effective pickup range
Sampling Rate	32 KHz HD Wideband Audio
Frequency Response	50Hz ~ 16kHz
Signal-to-noise Ratio	68 dB(A)
Sensitivity	94 dB SPL @ 1 kHz, -35 dBFS
Speaker Specifications	
Speaker Type	Dual-frequency division design, professional academic sound chamber structure, top-tier sound tuning
Rated output power	15W
Effective frequency range	50Hz ~ 20kHz
Volume	89dBA @ 1m
THD	< 3%
Sound Quality	
Noise Suppression	Supports AI noise reduction, de-reverberation, AI automatic gain control, echo suppression algorithms, and full duplex processing capabilities
Hardware Interfaces	
Power Supply	Operating Voltage: AC 100V ~ 240V, DC 12V Operating Frequency: 50Hz / 60Hz
Supported Systems	Windows / Mac / Android / Linux
USB Interface	USB 2.0 Type-C / Type-A: (1 × computer interface, used for connecting PC and other devices for audio input/output); UAC 1.0 (2 × extension microphone interfaces, used for connecting extension microphones)
Indicators	Circular indicator light strip, various color combinations, easy to identify the current status of the microphone
Buttons	Touch-sensitive buttons (volume+, volume-, mute, hang up, dial)
General Specification	
Bare Machine Dimensions (L× W × H)	Master microphone: 150 × 150 × 85mm Expand microphone: 80 × 80 × 25mm Wireless Adapter: 93 × 28 × 13mm
Packaging Dimensions	297 × 248 × 125mm
Bare Machine Weight	Master microphone: 1.24 kg Expand microphone: 0.13 kg × 2 Wireless Adapter: 0.038g
Total Weight	2.35 kg
Environmental Conditions	Temperature: 0° C ~ 40° C (Operating), -40° C ~ 60° C (Non-operating) Relative Humidity: 45% ~ 90% (Operating), 30% ~ 90% (Non-operating)
Wireless Technology	
Wireless Communication	2.4GHz wireless communication, 48K sampling rate
Wireless Transmission Distance	Up to 15 meters (tested in office environment), Operating Frequency: 50Hz / 60Hz

Interface Diagram

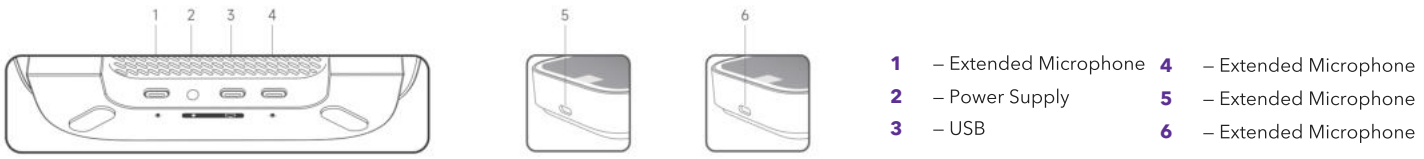

1 – Extended Microphone
2 – Power Supply
3 – USB
4 – Extended Microphone
5 – Extended Microphone
6 – Extended Microphone

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

CASCADING DIGITAL ARRAY MICROPHONE

SVC-MICARRAY-1 / SVC-MICEXT-6PO

This digital array microphone is designed for business meetings, interactive teaching, and collaborative environments. It supports standalone use for simple audio capture scenarios and can also be expanded into a cascading microphone system when paired with the SVC-MICEXT-6PO Smart Audio Processor, adapting easily to different room sizes and application requirements.



SVC-MICARRAY-1



SVC-MICARRAY-1-S

360° Pickup | Multiple cascades | PoE | Flexible Installation

Features

SVC-MICARRAY-1

Digital Microphone Array
Built with six high SNR microphones forming a ring array.

PoE
SVC-MICEXT-6PO PoE cascading supports up to 6 microphones, each with a clear pickup range of 3 m and an effective coverage of up to 6 m.

AI Audio Algorithm
Uses blind beamforming to automatically locate sound sources and adjust pickup direction for balanced audio. The 3A algorithms effectively suppress environmental noise, reverberation, and enhances sound quality.

Built-in Audio Processing Unit
Equipped with a powerful audio processing unit, eliminating the need for an external processor and reducing wiring. It offers ultra-low latency for seamless remote calls.

Flexible Installation Options
Supports desktop placement, ceiling mounting, and hanging installation.

SVC-MICEXT-6PO

Professional Audio Processor
The SVC-MICEXT-6PO uses a specialized chip and an embedded system for stable performance. It provides accurate volume control, efficient audio processing, low delay, and a secure, reliable system.

Audio Algorithm
Integrates automatic noise suppression, automatic gain control, automatic echo cancellation, automatic equalization, intelligent microphone mixing, and anti-reverberation, a new generation of digital audio technology that effectively enhances sound quality.

Multiple Interfaces
Capable of cascading up to 6 pcs microphone input, featuring 4 linear inputs and 4 linear outputs. It also supports USB audio input and output, and can be expanded to include wireless microphones.

Plug and Play
Standard RJ45, USB, and audio interfaces for easy setup, long-distance transmission, and strong anti-interference.

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-MICARRAY-1 / SVC-MICEXT-6PO
SVC-MICARRAY-1 Specification	
Microphone Array	Built-in 6 high signal-to-noise ratio digital microphones
SNR	65 dB(A)
Sensitivity	-38 dBFS
Sampling Rate	32K
Number of Cascades	6
Control mode	Mute button
Pickup Range	360° omnidirectional pickup
Pickup Distance	3 meters clear pickup, 6 meters effective pickup
Acoustic Echo Cancellation(AEC)	Support
Automatic Noise Suppression (ANS)	Support
Automatic Gain Control(AGC)	Support
Network Interface	RJ45 uplink and downlink cascade ports
USB Interface	USB audio interface (Type-C), UAC1.0 protocol, Audio data communication, software upgrade and parameterization
Analog Audio	AUX1, AUX2 Linear audio inputs and outputs
Cascade Method	PoE
Power Input	PoE cascade 48V power supply, support IEEE 802.3 at standard / USB 5V 500mA (single)
Dimensions	Ø 170 × H 40 mm
SVC-MICEXT-6PO Specification	
Network Interface	1 × Uplink LAN interface; 1 × Downlink cascaded DMIC interface, with up to 6 levels of microphone cascaded
USB Interface	1 × Device interface, used as a USB audio device to connect to a USB host (such as a PC); 1 × Host interface, used as a USB host to connect USB devices
Network Interface	4 × Input Phoenix terminal interface, unbalanced linear audio input; 4 × Output Phoenix terminal interface, unbalanced linear audio output
Power Interface	DC 12V
Key	Tap the button (mute button with light indication)
Power Supply	DC 12V/3A
PoE	PoE 48V power supply, supporting IEEE802.3 AT
Dimensions (W x D x H)	160 × 88 × 27mm
Weight	Approx 0.4Kg

Optional Accessories:
Smart Audio Processor - SVC-MICEXT-6PO



SVC-MICEXT-6PO

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia


Interface Diagram

Array Microphone – SVC-MICARRAY-1

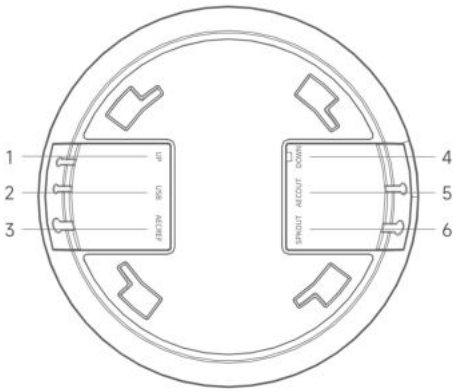

1 – UP
2 – USB
3 – AECREF
4 – DOWN
5 – AECOUT
6 – SPKOUT

Audio Processor – SVC-MICEXT-6PO

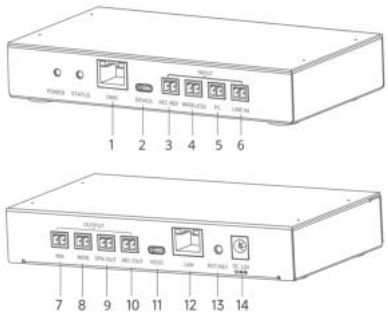

1 – DMIC
2 – Type-C
3 – AEC-REF
4 – WIRELESS
5 – PC
6 – LINE IN
7 – MIX
8 – MON
9 – SPK-OUT
10 – AEC-OUT
11 – HOST
12 – RJ45
13 – RST/KEY
14 – Power

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.


For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

CEILING SOUND-REINFORCING MICROPHONE

SVC-MICARRAY-2

Designed specifically for the amplification needs of regular classrooms, it consists of an invisible amplification microphone and a set of digital powered speakers, making installation and deployment simple. The microphone incorporates audio processing algorithms, eliminating the need for additional audio processing equipment, to deliver clear and natural sound quality evenly distributed throughout the classroom. Teachers do not need to carry or adjust any sound pickup devices, allowing them to focus on teaching. Students can easily hear the lecture clearly from any position in the classroom, facilitating learning.

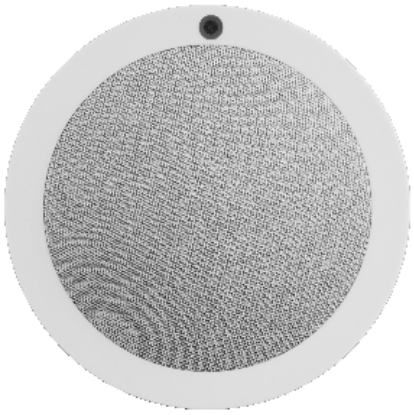

Hands-free Contactless | Long Pickup Distance | Howling Suppression | Voice Fence | Self-adaptive Debugging-free

Features

Contactless Use, Free Your Hands

No need to hold or wear sound pickup equipment, and no need to charge and maintain. Equipped with an infrared remote control, one-click controls the switch and adjusts the volume, freeing your hands and using it more contactless.

Long-Distance Sound Pickup, Free Movement

The microphone has seven built-in digital microphone arrays, which can achieve effective sound pickup in an 8-meter radius towards its directional area (3 meters or optimal sound pickup), automatically shielding noise interference outside the area.

Clear Sound Pickup And Comfortable Listening Experience

Built-in audio processor, equipped with environment adaptive algorithm, howling suppression, automatic gain algorithm, etc. Automatically eliminate noise and dereverberation, 18ms ultra-low latency, and more comfortable listening.

Voice Fence Algorithm, Isolate Noise Interference

Developed a noise barrier system to isolate interference. Microphones are capable of forming virtual walls at pre-set boundaries of the designated sound pick-up area, capturing sounds within the wall while blocking out external interference. The suppression of external interference exceeds 30dB, with an effective working distance of 2m (optimal performance typically within 1m).

Healthy Sound Amplification, Better Than The National Standard

Paired with digital active speakers, the amplification volume is 6dB higher than the national amplification standard (increased by 8dB). Complying with the national healthy acoustic environment standards, it can provide clear and balanced sound amplification anywhere in the classroom.

Simple Deployment And Easy Maintenance

The microphone wiring is simple, powered by a USB cable, used by connecting the 3.5mm audio cable to the speaker. No complex wiring installation, and no debugging is needed, which saves labor costs.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-MICARRAY-2
Microphone	
Microphone Type	Build In Two Digital Microphone Arrays
Sensitivity	-38 dBFS
Signal-to-noise Ratio	65 dB(A)
Audio Features	
Frequency Response	100Hz - 8kHz
Sampling Rate	16K samples, High definition wideband audio
Pickup Distance	3m Clear Pickup (Cardioid pickup)
Beam Forming	Adaptive Beam
Automatic Feedback Suppression	Support
Automatic Noise Suppression	Support
Automatic Gain Control	Support
Automatic Reverberation Suppression	Support
Hardware Interface	
Audio Output	2x 3.5mm Spk-Out Linear output
Audio Input	1x 3.5mm Line-In interface
USB	Supports software upgrades and parameter configuration
General Specification	
Power	USB 5V Power
Dimension	Ø 155.9mm x H 38.2mm

Interface Diagram

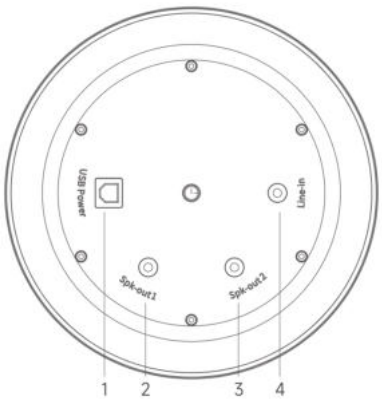

1 – USB POWER
2 – SPK-OUT
3 – SPK-OUT
4 – LINE IN

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

ALL-IN-ONE CEILING MICROPHONE & VOICE AMPLIFIER

SVC-MICCEILL-1

Integrating microphone, audio processor, amplifier, speaker, and ceiling mount, it requires no handheld or wearable devices. With ultra-low latency audio processing, it delivers clear pickup and balanced sound for a natural, seamless communication experience.





Hands-Free Sound Reinforcement | Sound Wall | Intelligent Noise Reduction | Low Latency | 5-in-1 Integration

Features

5-in-1 Highly Integrated Design

Combines array microphones, an audio processor, a power amplifier, a speaker, and an adjustable ceiling mount into one unit. Classrooms no longer require additional equipment installation or multiple cable connections, leading to a cleaner environment and easier maintenance.

One-Cable Connection, Easy Installation

The unit only requires a single PoE network cable for normal operation. It features an adjustable ceiling mount that can adapt to various classroom installation environments, allowing for quick deployment.

Professional Sound Reinforcement

The system features built-in high-power dual-channel speakers and a high-performance digital power amplifier, complemented by a professional acoustic enclosure design and precise EQ tuning. This combination delivers rich bass, full midrange, and clear treble, ensuring a natural and articulate reproduction of human voices. It also protects students' hearing, allowing even those seated in the back row to clearly hear the lecture content.

Intelligent Zone Noise Reduction

The “Sound Wall” technology lets users set virtual boundaries for sound pickup, effectively isolating audio within a chosen area while reducing outside noise. It includes a built-in audio processing unit that employs advanced algorithms for noise reduction, echo cancellation, and automatic gain control, ensuring clear lecture delivery even in noisy environments.

Excellent Sound Quality

Built-in 7 gold-plated large-diaphragm condenser microphones form a beamforming digital array, featuring high sensitivity, low noise floor, and wide frequency response. It captures every detail clearly, providing professional recording-level, delicate, and full sound quality.

Hands-Free, Focus on Teaching

Teachers do not need to wear any audio pickup equipment, allowing them to move freely in the podium area while focusing on the teaching process. It also reduces the use of contact devices, fostering a healthier teaching environment.

Hearing Protection

The integrated design of the microphones and speakers aligns sound direction with the teacher's position, reducing mental fatigue from visual-auditory misalignment and keeping students comfortable during long listening sessions. Ceiling-mounted speakers are also positioned away from front-row students to protect their hearing.

Ultra-Low Latency

Utilizes a unique adaptive fast convergence algorithm that enables ultra-low processing latency. Additionally, it features sound-image alignment restoration, allowing teachers to perceive the enhancement of their voices without any delay. This eliminates the need for loud speaking and effectively protects their vocal health.

Voice Guidance, Wireless Control

Adopts a unique adaptive fast convergence algorithm to achieve ultra-low processing latency. Combined with sound-image alignment restoration capability, it allows teachers to clearly perceive the sound reinforcement effect of their voices without delay, eliminating the need for loud speaking and effectively protecting their voices.

Easy Management and Maintenance

Facilitates network-based management, upgrades, and maintenance, addressing equipment management issues such as distribution, recovery, charging, loss, and maintenance of existing contact devices. This significantly reduces operational and maintenance costs.

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-MICCEILL-1
Microphone	
Microphone Type	7 gold-plated large-diaphragm condenser microphone digital array, adaptive beamforming technology
Pickup Range	Clear pickup distance: 1-3 meters, supporting zone-controlled pickup
Frequency Response	100Hz - 8kHz
Sensitivity	-36 dBFS
Signal-to-Noise Ratio	66 dB(A)
Sampling Rate	16KHz, high-definition wideband audio
Speaker	
Driver Type	2 × full-range speaker with bass radiation-enhanced enclosure
Rated Power / Impedance	2 × 8W/8Ω (maximum power 10W)
Frequency Response	175Hz-20kHz (-10dB)
Sensitivity	85 3dB@1M/1W
Total Harmonic Distortion (THD)	<3% at 180Hz-10kHz
Audio Algorithms	
Automatic Feedback Cancellation (AFC)	Support
Automatic Noise Suppression (ANS)	Support
Automatic Gain Control (AGC)	Support
Automatic Dereverberation	Support
Network Feature	
Network Protocol	IPv4
Other Protocol	TCP/IP, SSH, ARP
Installation Method	
Installation Method	Integrated retractable ceiling mount, supporting ceiling installation
Safety Protection	Steel wire safety rope, wear-resistant, durable, mildew-resistant, acid and alkali resistant, simple and lightweight. safer installation and use, preventing accidental falling
I/O Interface	
USB	1 × USB 2.0 Type-B(DEVICE interface), connecting to PC host, supporting software upgrade and parameter 1 × USB 2.0 Type-C(HOST interface), external USB device expansion (reserved)
Analog Audio	1 × Line out(3.5mm TRS interface), for external active speaker expansion (reserved)
Network Interface	1 × RJ45: 10/100 Base-T, supporting PoE power supply(IEEE802.3 at) and remote management
Package Content	
Main Unit	1 × Intelligent Hands-Free Audio Pickup and Amplification All-in-One Machine (including microphone and its connecting rod)
Network Cable	1 × RJ45 network cable, 5 meters
Installation Accessories	1 × Retractable bracket 1 × set of expansion bolts and screws 1 × Remote control Wall-mounted bracket 1 × Ceiling safety rope
Remote Control	1 × Infrared remote control
General Specification	
Power Supply	48V/0.5A PoE power adapter
Average Power Consumption	18W
Maximum Power Consumption	24W

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications (Cont.)	**SVC-MICCEILL-1**
Operating Temperature	0°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Dimensions (W × D × H) (Ø × H)	**Main unit** (without microphone, retractable ceiling mount, and microphone connecting rod): 600 × 127 × 81mm; **Microphone:** 136(Ø) × 40mm (H); **Microphone connecting rod:** 15(Ø) × 650mm(H); **Retractable ceiling mount:** 35(Ø) × 600 ~ 1150mm (L)
Weight	3031g

Interface Diagram

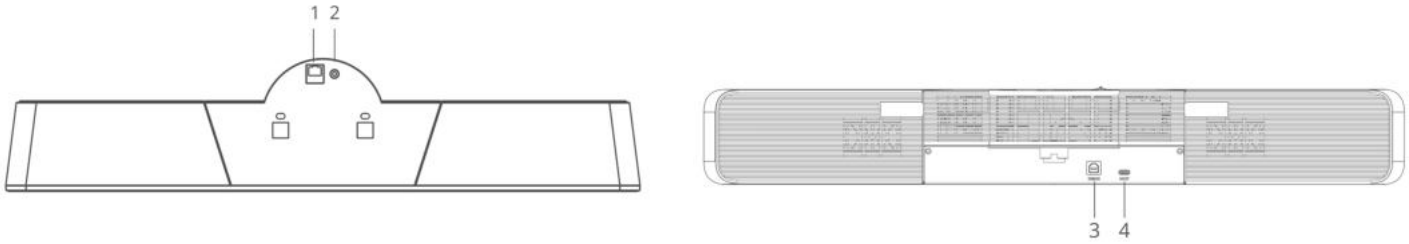

1 – RJ45
2 – 3.5mm Line out
3 – USB 2.0 Type-B (DEVICE)
4 – USB 2.0 Type-C (HOST)

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

HI-FI SPEAKER

SVC-HFSPEAK

A high-fidelity stereo speaker system for meeting rooms, classrooms, and collaborative spaces. It delivers (10W + 15W) x 2 rated output through a 4Ω dual-channel design, reproducing clear voice and balanced sound across a 110Hz - 16kHz frequency response. The system is made up of a main unit and a secondary unit that can be used separately or combined into a single 805mm bar, and supports both wall-mounted and desktop installation to suit different room layouts.



Dual-Channel Hi-Fi | (10W + 15W) × 2 | 110Hz - 16kHz | Main + Auxiliary | Wall / Desktop

Features

Dual-Channel Hi-Fi Output

Delivers (10W + 15W) x 2 rated output over a 4Ω design, producing balanced, room-filling sound with total harmonic distortion kept below 1% (300Hz - 10kHz @ 7.5W).

Wide Frequency Response

Covers a 110Hz - 16kHz range (3 dB) with a signal-to-noise ratio of 65dB or higher, keeping voice and music clean and natural for both conferencing and media playback.

Main + Auxiliary Design

Combines a 408.5mm main unit and a 402.5mm secondary unit that work separately or join into a single 805mm bar, adapting to different room sizes and seating arrangements.

Flexible Installation

Supports both wall-mounted and desktop placement, integrating cleanly into meeting rooms, classrooms, and huddle spaces.

Simple Wired Connectivity

Connects via a 3.5mm Line In and a dual-channel RCA interface for the sub speaker, powered from a single DC 18V supply for straightforward setup.


Reliable, Certified Build

Rated for continuous use with an MTBF above 30,000 hours and certified to CE, GS, CB, FCC, ETL, SAA, RCM, and PSE standards.

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	SVC-HFSPEAK
Speaker	
Rated Output Power	(10W + 15W) x 2 (+/- 0.5 dB, 10% THD)
Speaker Impedance	4Ω
Frequency Response	110Hz - 16kHz / 3 dB
Loudness	50dB SPL @ 1W, 95dB SPL @ 7.5W
Signal-to-noise Ratio	≥ 65dB
Total Harmonic Distortion	300Hz – 10kHz < 1% @ 7.5W
Interface	
Audio Input	1x Line In, 3.5mm Audio Interface
RCA	1x RCA, Dual Channel, (Connect the sub speaker)
Power	DC 18V
Installation Mode	
Installation Methods	Wall-mounted, Desktop placement
Combined Mode	Separate main and auxiliary units, Integrated main and auxiliary units
General Specification	
Input Voltage	DC 18V
Input Current	2A
Operating Temperature	-10° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Power Consumption	30W
MTBF	>30000h
Main Unit	408.5mm (W) × 73mm (D) × 90mm (H)
Secondary Unit	402.5mm (W) × 73mm (D) × 90mm (H)
Dimension	805mm (W) × 73mm (D) × 90mm (H)
Weight	1.5kg
Product Certification	CE, GS, CB, FCC, ETL, SAA, RCM, PSE

Interface Diagram

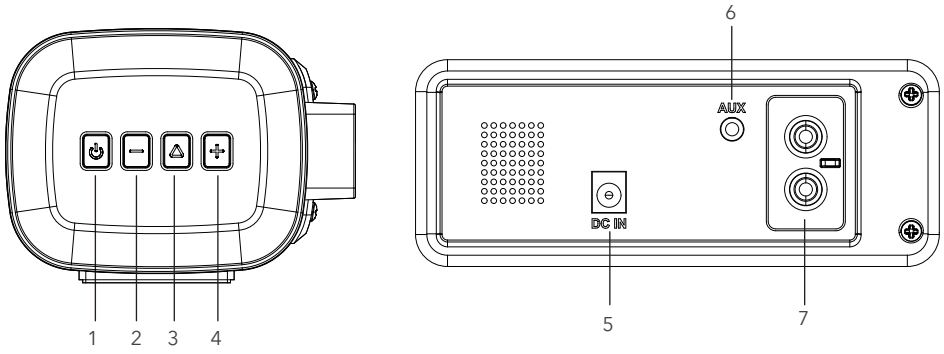

1 – Power Key
2 – Volume - Key
3 – Play/Pause Key
4 – Volume + Key
5 – Power Interface
6 – Audio Interface
7 – RCA Interface

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

WIRED BYOM TRANSMITTER

VCS-SHASCR-4K

Designed for business conference screen-sharing scenarios, this solution seamlessly integrates with cameras, all-in-one video bar, video conferencing terminals, and other AV devices. Featuring plug-and-play functionality, it employs wired connectivity to deliver ultra-high-resolution screen sharing and BYOM (Bring Your Own Meeting) applications, effectively addressing the needs of modern enterprises for adaptable meeting environments.



Plug and Play | 4K Wired Screen-Sharing | BYOM | DP Reverse Charge

Features

Plug-and-Play
Without any driver/software installation, it can achieve instant screen mirroring and one-touch mute control, which gives users an easier meeting experience.

4K Screen Sharing
Hardware encoding and decoding ensure wired 4K screen sharing with pixel-perfect fidelity while delivering 1080P resolution in BYOM mode for smooth meeting detail rendering.

High Compatibility
USB-C/HDMI/DP in Port inputs ensure compatibility with PCs and cameras. 1000BaseT Ethernet enables long-distance AV signal transmission for large conference rooms or distributed deployment.

Multiple Power Options
PoE/USB-C power options with reverse 65W PD charging capability. Eliminates redundant power adapters and simplifies cabling infrastructure.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	VCS-SHASCR-4K
Audio and Video Characteristics of USB-C	
USB-C Video Resolution	3840x2160, 2560x1600, 1920x1200, 1920x1080, 1366x768, 1280x800, 1280x720, 1024x768
Screen Mirroring Encoding Resolution/ Frame Rate	Up to 3840x2160, 30fps
Video Encoding Format for Screen Mirroring	H.265/H.264
Audio Encoding Format for Screen Mirroring	32KHz/16bit PCM, Mono/Stereo
Return Encoding Resolution/ Frame Rat	Up to 1920x1080, 30fps
Return Video Encoding Format	MJPEG
Return Audio Encoding Format	32KHz/16bit PCM, Mono/Stereo
Control Characteristics	
USB Control Protocol	UVC/UAC
Body Button	1 screen mirroring button to turn screen mirroring on/off, with dual - color status indicator light 1 mute button to control local mute in BYOM application scenarios, with dual - color status indicator light; 1 Reset hole
System Compatibility	
Cloud Video Conferencing Software Supported	Microsoft Teams, Zoom, Google Meet
Playback App Supported	Camera application in Windows 10/11 QuickTime application in Mac OS X Other third-party media playback software Windows 7/8.1/10/11 32/64-bit Mac OS X 10.10/10.11/10.12/10.13 or later
Operating System Supported	Windows 7/8.1/10/11 32/64-bit Mac OS X 10.10/10.11/10.12/10.13 or later
Interfaces	
USB-C	1×USB 2.0 Type-C, female socket, supports DP input, USB audio and video output, control signaling transmission, and PD reverse power supply. Maximum power supply capacity: 65W (external power adapter required). 1×USB 2.0 Type-C, female socket, supports USB PD3.0 protocol, input voltage: up to 20V/3.25A
Ethernet	1×RJ45, supports 10M/100M/1000Mbps half - duplex and full - duplex adaptive negotiation, supports POE power supply (for the device's own operation only).
HDMI	1×HDMI 2.0, female socket, supports 4KP30 video input
Generic Spec	
Input Voltage	USB 5V /PoE (IEEE802.3af)
Input Current	0.9A
Maximum Power Consumption	3.0W
Operating Temperature	0° C ~ +40° C
Storage Temperature	-40° C ~ +60° C
Operating/Storage Humidity	0 ~ 90% (relative humidity, no condensation)
Dimensions (W x H x D)	TBD
Net Weight (g)	TBD

Interface Diagram

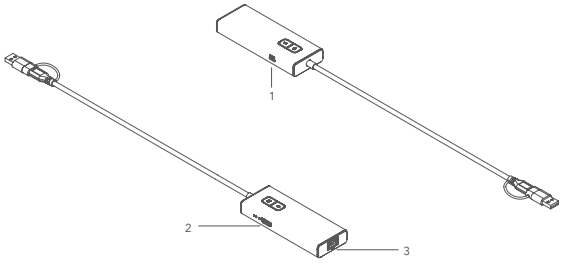

1 – Power
2 – HDMI
3 – LAN

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

WIRELESS CAMERA RECEIVER

CCS-VDWT-300Mbp

This device is a 4K wireless transmission receiver that enables a wireless transmission setup. It connects to the network via a switch and can directly access the network stream from corresponding cameras without needing additional wiring, making camera placement simple and flexible.



Wireless Image Transmission | MIMO | 300Mbps | Max 1-to-8

Features

Wireless Transmission

Stable and reliable wireless transmission, 2 × 2 MIMO and transmitter beamforming technology, with a maximum transmission rate of 300Mbps, strong penetration, and a transmission distance of up to 200 meters. Equipped with automatic search and intelligent configuration functions, with high transmission efficiency.

One to Many Transmission

A wireless receiving box can be equipped with multiple (up to 8) wireless cameras to form a wireless transmission scheme. The wireless receiving box can access the network through the switch, and can directly pull the Flow network of the corresponding camera. The machine position can be easily arranged without wiring.

For technical or sales support, please visit:
www.starviewint.asia


Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia

Technical specifications	CCS-VDWT-300Mbp
Wireless characteristics	
Wireless mode	5.15~5.35GHz, 5.425~5.725GHz, 5.745~5.850GHz
Transmitting Power	27dBm
Antenna Mode	2x2 MIMO, Beamforming
Bandwidth	20/40MHz channel width selection
Modulation mode	OFDM
Transmission data rate	Max.300Mbps
Network mode	Point to point, point to multipoint
Penetration power	1-2 walls
Distance	200 meters (can be paired with higher gain antennas for further distances)
standard protocol	802.11a/n
Interface	
Network Interface	1 × RJ45: 10M/100M adaptive Ethernet port
Power interface	JEITA type (DC IN 12V)
Power indicator light	Red
Generic Spec	
Input Voltage	DC 12V
Input Current	1.0A
Operating Temperature	-10° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Power Consumption	12W (Max.)
Dimension (W x D x H)	135 × 88 × 30mm
Net Weight	0.27kg

Interface Diagram

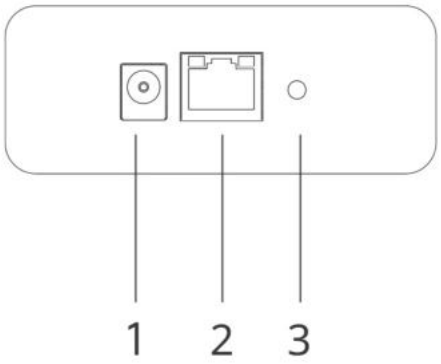

1 – Power
2 – LAN
3 – Power indicator light

For technical or sales support, please visit:
www.starviewint.asia

Performance specifications are typical. Due to constant research, specifications are subject to change without notice. For the most up-to-date specifications, please contact an authorized Starview representative.

For assistance with confirming the Jurisdiction & Classification of Starview Asia products, please contact info@starviewint.asia

Copyright © 2026 STARVIEW ASIA. All rights reserved.
Australia Headquarters: Level 40, 140 William Street, Melbourne VIC 3000, Australia